SUBMITTAL: MODEL CP FLUSH ACCESS PANELS

Model CP for Plaster Wall or Ceilings :
Door face has plasterguard in 1/2" recess, and the frame features 3" expanded metal lath wings to accept application of plaster to match surrounding walls. A continuous hinge, ensures easy opening of the panel. Screwdriver operated cam locks are provided, the size of the door determining the number.

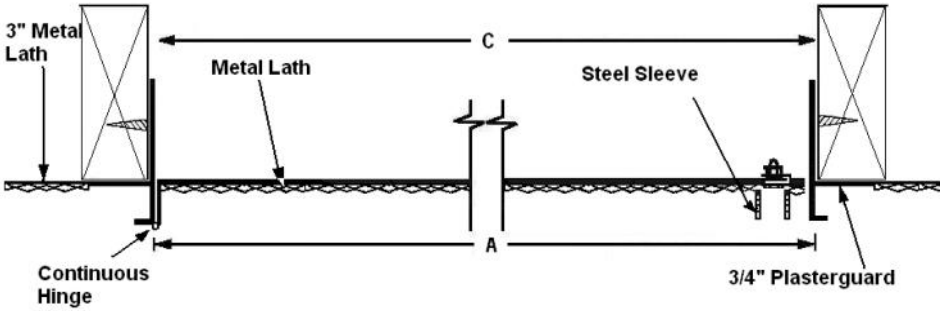

SPECIFICATIONS:

Door Panel: 1/2" Recessed Metal lath over 18 gauge steel. Recessed door depths from 1/4" to 7/8".
Indicate Door Recess Here:_____
Frame: 16 gauge steel with 3/4" plasterguard and with an additional 3" wide wing of metal lath for a plaster application to the edge of the door.
Finish: Gray primer coat
Hinge: Continuous hinge mounted on the long side of panels.
Lock: Flush screwdriver-operated steel cam standard.

NOTE: Order Size = ID of Frame

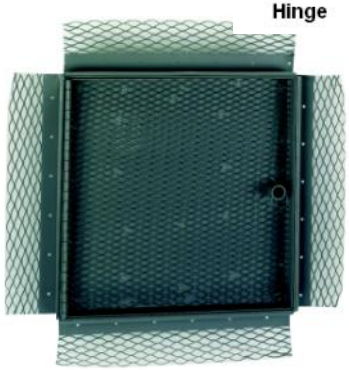

OPTIONAL FEATURES AT ADDITIONAL COST:

☐ Optional colors - see catalog or website
W-White, **R**-Red, **BK**-Black, **S-s**and
FBK-Flat Black, , **AB**-AMS Beige, **B**-Bronze
SB-SC Flat Beige, , **SA** - Satin Aluminum

☐ **(L)** Cylinder lock installed
☐ **(CT)** Torx head cam
☐ **(CA)** Hex head cam
☐ **(SHC)** Spanner head cam

QTY	A MODEL SIZE	C OUTSIDE FRAME DIMENSIONS		SHIPPING WEIGHT APPROX.	
	WIDTH X HEIGHT	WIDTH	HEIGHT		LATCH(ES)
	12" X 12"	12 1/4 "	12 1/4 "	9 lbs	1
	12" X 24"	12 1/4 "	24 1/4 "	14 lbs	2
	18" X 18"	18 1/4 "	18 1/4 "	14 lbs	3
	22" X 30"	22 1/4 "	30 1/4 "	21 lbs	4
	24" X 24"	24 1/4 "	24 1/4 "	20 lbs	4
	24" X 36"	24 1/4 "	36 1/4 "	31 lbs	5

JL INDUSTRIES

ACTIVAR INC. www.activarcpg.com Construction Products Group

Distributor:	Quantity:
Contractor:	Approved By:
Model #:	Architect:
Project:	Date:

HEADQUARTERS & CUSTOMER SERVICE:4450 WEST 78TH ST CIRCLE, BLOOMINGTON, MN 55435-5416 **PH**: 800-554-6077 **FAX:** 952-835-2218 **EMAIL:** SALES@JLINDUSTRIES.COM WWW.ACTIVARCPG.COM
ACPG SOUTHEAST (THOMAS ENTERPRISES):FT MYERS, FL **ACPG WEST COAST (SAMSON MFG):** COMMERCE, CA **WAREHOUSES:** DALLAS TX, LANCASTER PA, ATLANTA GA, CHICAGO IL, SEATTLE WA 4-15-11