SUBMITTAL: VINYL CORNER GUARD SYSTEMS: SGV CORNER GUARD

Construction: Continuous aluminum retainer Type 6063-T5, mill finish, .062" (1.57mm) thick. High-impact vinyl acrylic cover .078" (1.98mm) thick. In accordance with ASTM 4226 and ASTM D256. Installations less than 8' high provided with end cap.
Length: 48" standard". Up to 20'.
Wing Length: 2" and 3".
Angle: 90° (2" & 3" wing), 135° (3" wing).
Corner Type: Square (S), Radius (R) or Endwall (EW).
Mounting: Installed with screws through aluminum retainer to wallboard surface. ***Note:*** Radius corner installations must be 3/4" (19mm) radius to accommodate aluminum retainer.
Flame Resistance: Meet Class 1/A requirements for flame spread and smoke density.



SGVS-90-2

ALUMINUM RETAINER
VINYL ACRYLIC COVER
END CAP (TOP & BOTTOM) SGVS-90-2-EC



SGVS-90-3

ALUMINUM RETAINER
VINYL ACRYLIC COVER
END CAP (TOP & BOTTOM) SGVS-90-3-EC



SGVR-90-2

ALUMINUM RETAINER
VINYL ACRYLIC COVER
END CAP (TOP & BOTTOM) SGVR-90-2-EC



SGVR-90-3

ALUMINUM RETAINER
VINYL ACRYLIC COVER
END CAP (TOP & BOTTOM) SGVR-90-3-EC

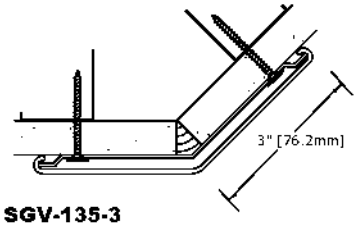

SGV-135-3

ALUMINUM RETAINER
VINYL ACRYLIC COVER
END CAP (TOP & BOTTOM)SGV-135-3-EC

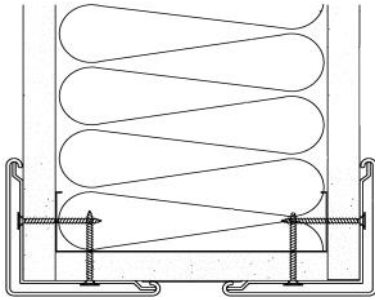

SGVEW

Vinyl Corner Guard System for Surface Mount: SGV Series

QTY	MODEL	Angle	Corner	Wing
	SGVS-90-2	90	Square	2"
	SGVS-90-2-EC	90		2"
	SGVR-90-2	90	Radius	2"
	SGVR-90-2-EC	90		2"
	SGVEW-2	90	U	2"
	SGVS-90-3	90	Square	3"
	SGVS-90-3-EC	90		3"
	SGVR-90-3	90	Radius	3"
	SGVR-90-3-EC	90		3"
	SGVEW-3	90	U	3"
	SGV-135-3	135	Std.	3"
	SGV-135-3-EC	135		3"

End Caps (EC) are Always Priced Separately, and Need to be Ordered for any Corner Guard under 8" to Present a Finished Look .

JL INDUSTRIES / ACTIVAR INC. www.activarcpg.com Construction Products Group	Distributor:	Quantity:
	Contractor:	Approved By:
	Model #:	Architect:
	Project:	Date:

HEADQUARTERS & CUSTOMER SERVICE:4450 WEST 78TH ST CIRCLE, BLOOMINGTON, MN 55435-5416 **PH**: 800-554-6077 **FAX:** 952-835-2218 **EMAIL:** SALES@JLINDUSTRIES.COM WWW.ACTIVARCPG.COM

ACPG SOUTHEAST (THOMAS ENTERPRISES):FT MEYERS, FL, **ACPG WEST COAST (SAMSON):** COMMERCE, CA **WAREHOUSES:** DALLAS TX, LANCASTER PA, ATLANTA GA, CHICAGO, IL 9-30-10

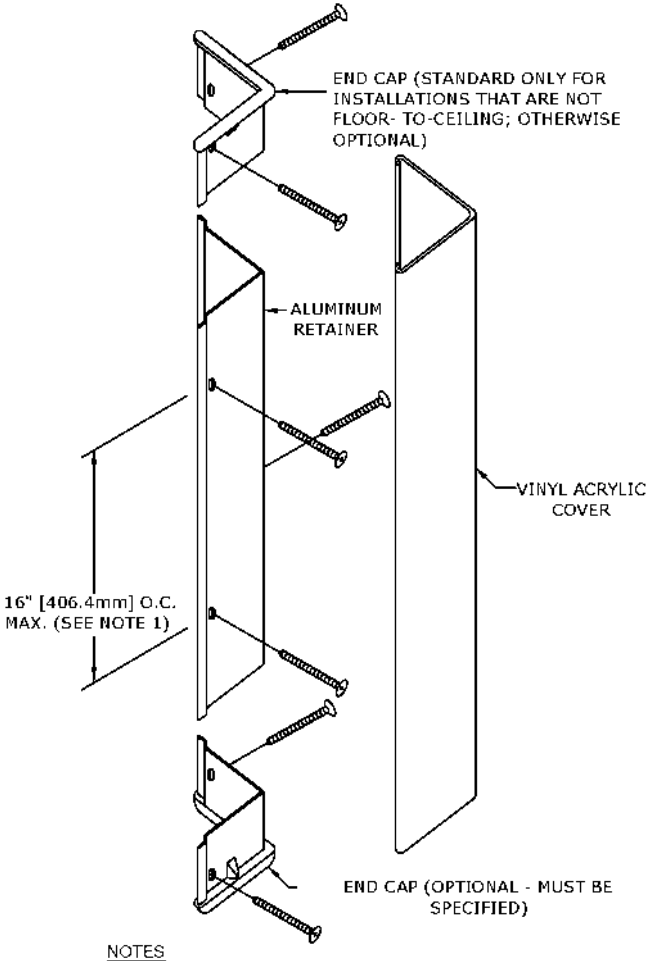

NOTES
1. FACTORY-DRILLED FASTENER HOLES ON RETAINER LEGS ARE STAGGERED 8" [203.2mm] O.C. MAX. (HOLES ON EACH LEG ARE SPACED 16" [406.4mm] O.C. MAX.)

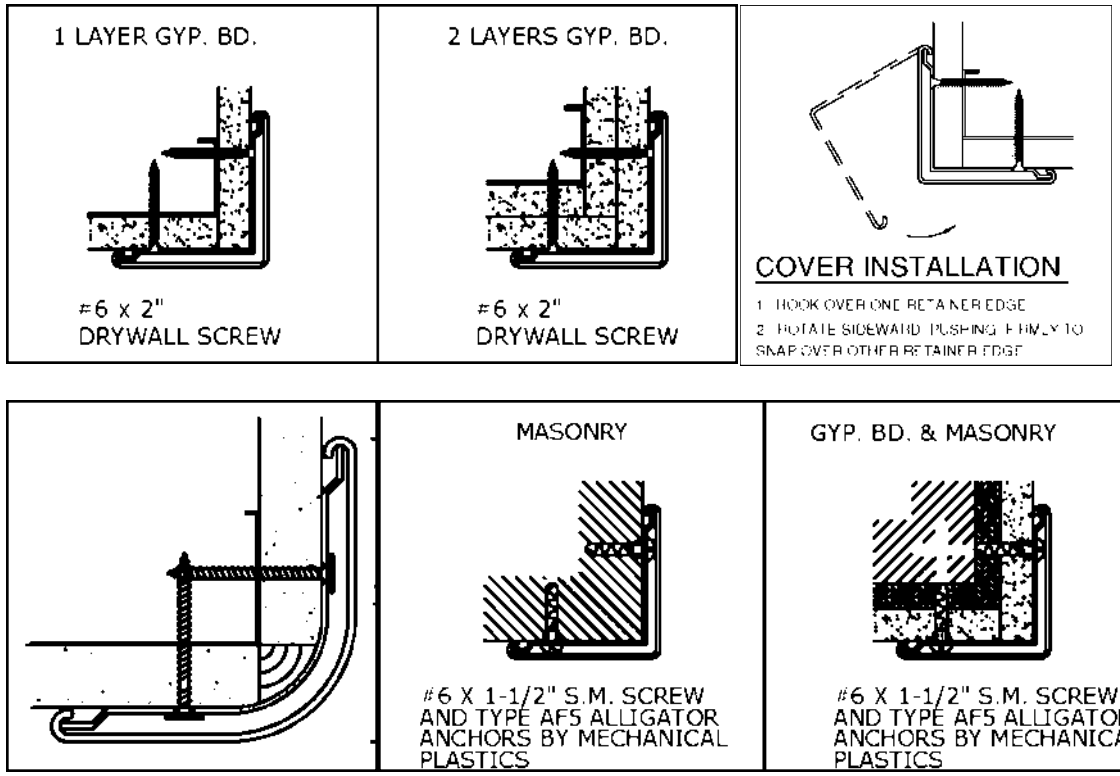

Note: Radius corner installations must be 3/4" (19mm) radius to accommodate aluminum retainer.

JL INDUSTRIES

ACTIVAR INC. www.activarcpg.com Construction Products Group

INSTALLATION DETAIL DRAWING AND TYPICAL FASTENING CONDITIONS FOR SGV CORNER GUARD

HEADQUARTERS & CUSTOMER SERVICE:4450 WEST 78TH ST CIRCLE, BLOOMINGTON, MN 55435-5416 **PH**: 800-554-6077 **FAX:** 952-835-2218 **EMAIL:** SALES@JLINDUSTRIES.COM WWW.ACTIVARCPG.COM
ACPG SOUTHEAST (THOMAS ENTERPRISES):FT MEYERS, FL, **ACPG WEST COAST (SAMSON):** COMMERCE, CA **WAREHOUSES:** DALLAS TX, LANCASTER PA, ATLANTA GA, CHICAGO, IL 9-30-10