SUBMITTAL: EQUIPMENT HATCHES EHA & EHG

Insulation: The lid has 1" fiberglass insulation in the space between the exterior cover and liner.

Construction: Hatch is 14 gauge galvanized steel (EHG) or .090 aluminum (EHA) fully welded and ground smooth for weather tightness. Includes 12" high curb and 4" wide flange for securing to roof deck. The cover includes a 14 gauge galvanized steel or .090 aluminum exterior and metal liner with a continuous bulb-neoprene door seal. Oversize doors may be spliced.

Hardware: Hardware includes heavy-duty galvanized hinges, compression spring automatic hold-open and operating arms with red vinyl handlegrip . For models 7' or larger - adjustable torsion spring automatic hold-open is provided. Lid hardware has a 2 point universal spring latch, and exterior and interior handles with integral padlock.

Finish: 2 coats prime coat.

Options:
_____ Acrylic Dome Style Hatch - See Separate Submittal DEHA & DEHG
_____ **(RHWL)** Gravity-operated battery-powered flashing warning light
_____ **(STH)** Saf-T-Hatch railing

Custom Sizes & Finishes Available - Consult Customer Service

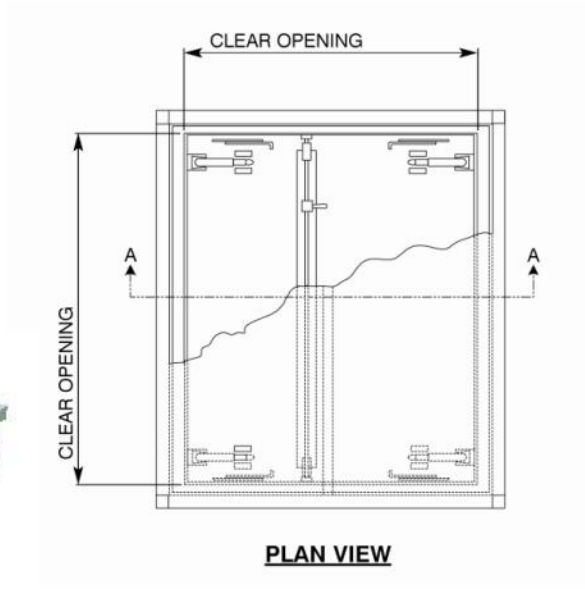

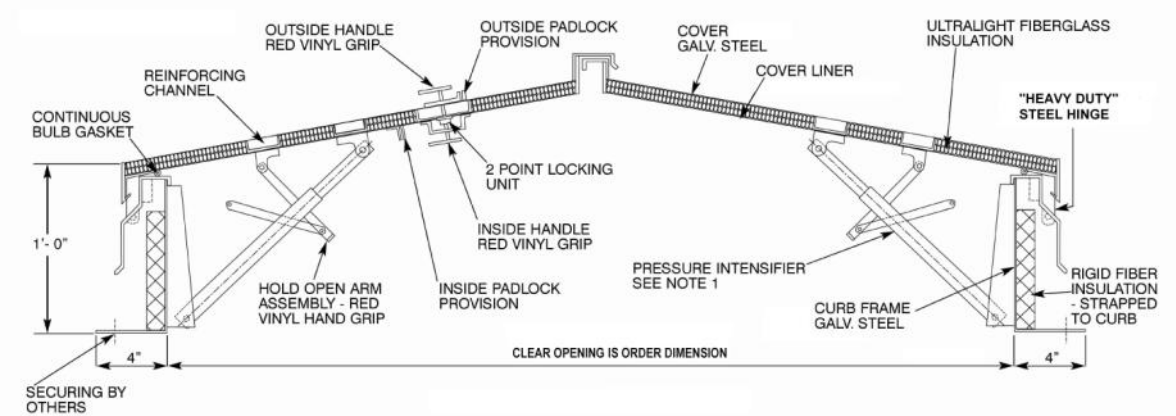

MODEL EHG SHOWN AT LEFT

QTY	MODEL	CLEAR OPENING
	EHA-1	72" X 96"
	EHA-2	60" X 120"
	EHA-3	120" X 120"
	EHA-4	144" X 144"
	EHG-1	72" X 96"
	EHG-2	60" X 120"
	EHG-3	120" X 120"
	EHG-4	144" X 144"
Custom Sizes Also Available		

JL INDUSTRIES / ACTIVAR INC. www.activarcpg.com Construction Products Group	Distributor:	Quantity:
	Contractor:	Approved By:
	Model #:	Architect::
	Project:	Date:

HEADQUARTERS & CUSTOMER SERVICE:4450 WEST 78TH ST CIRCLE, BLOOMINGTON, MN 55435-5416 **PH**: 800-554-6077 **FAX:** 952-835-2218 **EMAIL:** SALES@JLINDUSTRIES.COM WWW.ACTIVARCPG.COM
ACPG SOUTHEAST (THOMAS ENTERPRISES):FT MYERS, FL **ACPG WEST COAST (SAMSON):** COMMERCE, CA **WAREHOUSES:** DALLAS TX, LANCASTER PA, ATLANTA GA, CHICAGO, IL, SEATTLE WA 1/27/2011