




DOOR EDGE GUARDS - HINGE SIDE DOOR EDGE - DH, DHT, DHM & DHMT

Protects exposed hinge side of door when open.

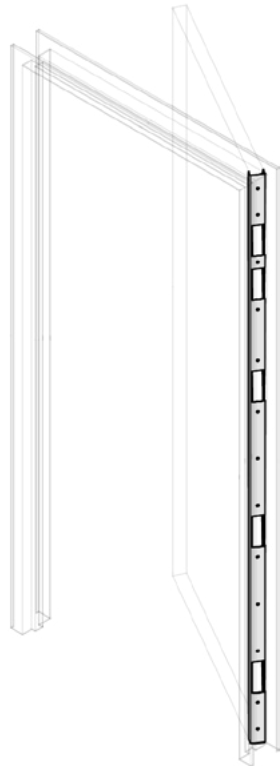

SPECIFICATIONS:

Standard Material: 18 gauge stainless steel.

Mounting: Countersunk mounting holes. #8 x 7/8" flathead Phillips head screws.

Height:

Standard: 80"

Maximum: 108"

Wing Width: 7/8"

Door Depth: 1-3/4"

ADDITIONAL OPTIONS:

Optional Construction:

Wing Widths from .27" - 2", Door Thickness from 1" - 4"

Optional Materials:

18 ga or 20 ga cold rolled steel

20 ga US32D stainless steel

18 or 20 ga zinc-plated steel

18 or 20 ga galvalneal steel

Cutouts: Available at additional cost. See page 3.

SEE PAGES 2 FOR EDGE ANGLE & HANDING GUIDE

QTY	PROFILE	EDGE ANGLE	DOOR HANDING	MATERIAL	HEIGHT	FINISH	(OPTIONS)						
[]	DH T (Two-Sided)	9 (Square Pair)	L (Left Hand)	S (Stainless Steel)	[]	B (Bronze)	<table border="1"> <tr> <td>H2 (20 ga Materials)</td> </tr> <tr> <td>(Torx Screws)</td> </tr> <tr> <td>(No Holes)</td> </tr> <tr> <td>Cut-Outs - Fill out pg. 3 or 4</td> </tr> <tr> <td>Wing Width</td> </tr> <tr> <td>Door Thickness</td> </tr> </table>	H2 (20 ga Materials)	(Torx Screws)	(No Holes)	Cut-Outs - Fill out pg. 3 or 4	Wing Width	Door Thickness
	H2 (20 ga Materials)												
	(Torx Screws)												
	(No Holes)												
Cut-Outs - Fill out pg. 3 or 4													
Wing Width													
Door Thickness													
(Three-Sided)	8 (Beveled Pair)	R (Right Hand)	(Cold-Rolled Steel)	AB (AMS Beige)									
M (Mortised Three-Sided)	7 (Double Egress)	LR (Left Hand Reverse)	E (Zinc-Plated Steel)	SB (SC Beige)									
MT (Mortised Two-Sided)	5 (Square Single)	RR (Right Hand Reverse)	G (Galvalnealed Steel)	S (Sand)									
	4 (Beveled Single)			C (Gray)									
				SI (Silver)									
				W (White)									
				BK (Black)									
				FB (Flat Black)									
				BA (Brass)									

Approval Signature is required. Fill out 1 form per order.



800-554-6077
 sales@activarcpg.com
 www.activarcpg.com

9702 Newton Ave S. Bloomington, MN 55431 | Many Locations Nationwide

Distributor:		Project:
Contractor:		Approved By:
Date:		Architect:
Scale: N/A	Pages: 1 of 3	Item #:

INSWING DOORS

		SQUARE - 90°		BEVEL - 93°†	
		LEFT HAND ACTIVE	RIGHT HAND ACTIVE	LEFT HAND ACTIVE	RIGHT HAND ACTIVE
SINGLE	5L			4L	
	9L			8L	
PAIR	9L			8L	
	9R			8R	

OUTSWING DOORS

		SQUARE - 90°		BEVEL - 87°†	
		LEFT HAND REVERSE ACTIVE	RIGHT HAND REVERSE ACTIVE	LEFT HAND REVERSE ACTIVE	RIGHT HAND REVERSE ACTIVE
SINGLE	5LR			4LR	
	9LR			8LR	
PAIR	9LR			8LR	
	9RR			8RR	

Examples of the number of edges, door handing, and edge angle from the chart above.

† Bevel measured on angle of "Key Side".




* Inswing doors take an astragal on the inactive side. Standard active inswing leaves cannot have astragal.

‡ Double Egress Handing is determined by desired hardware. See page 4 for cutout examples.



Charts depict bottom of page as key side of door

DOUBLE EGRESS	
7LR‡	
7R‡	
7RR‡	
7L‡	

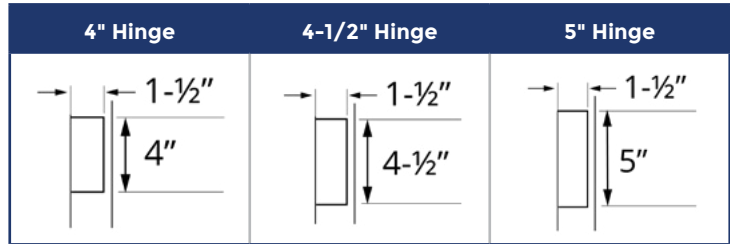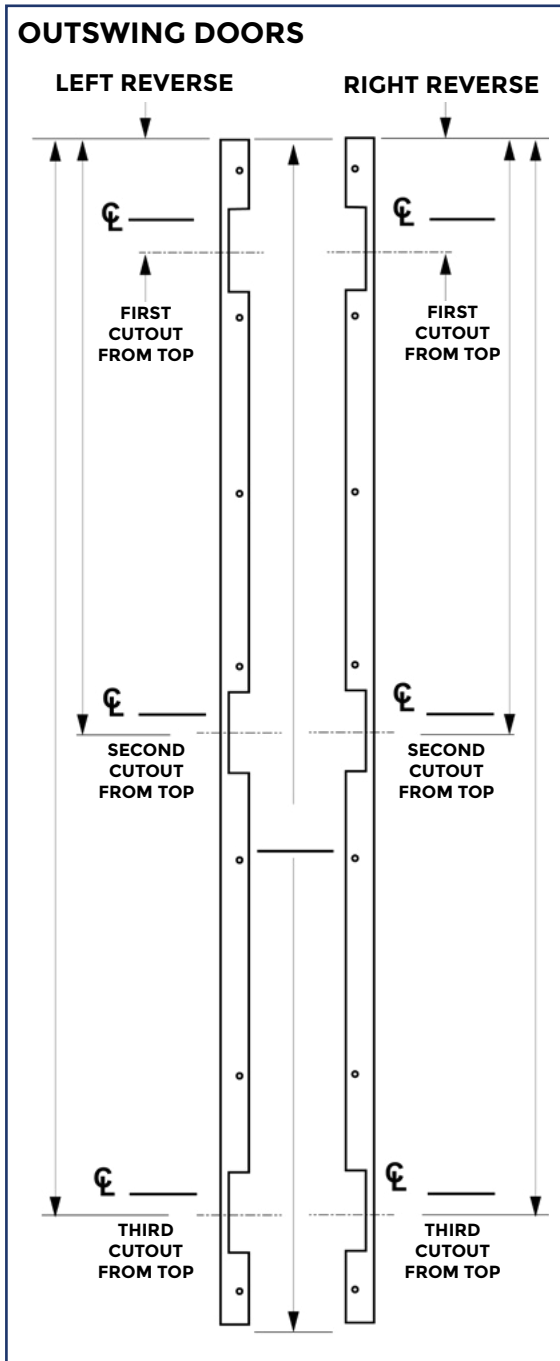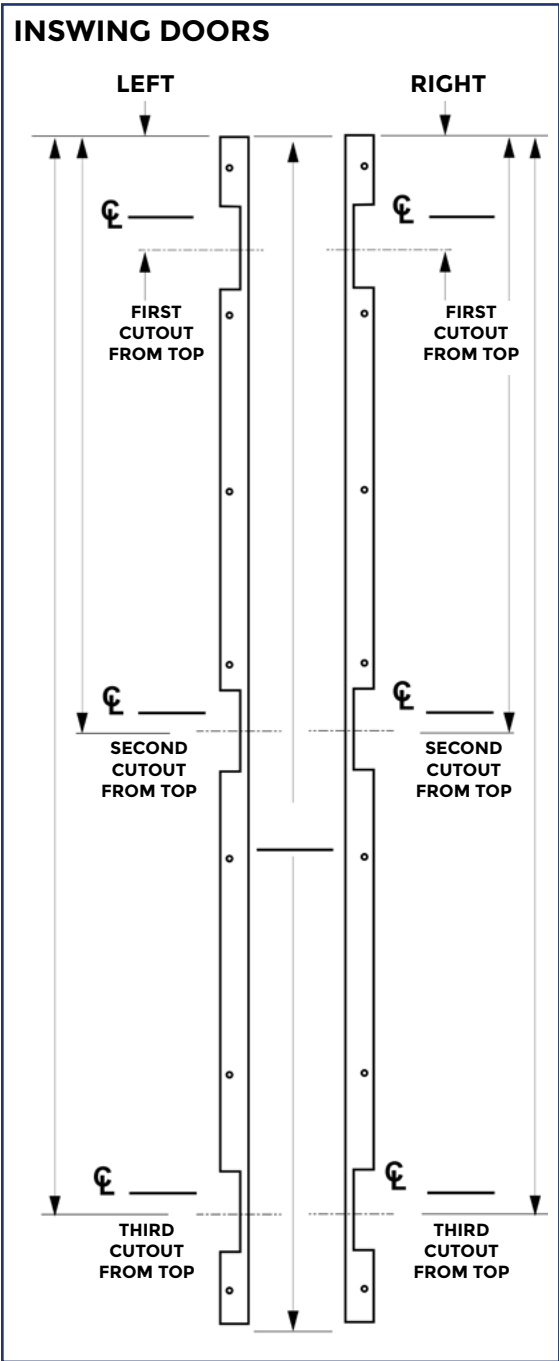

DOOR HINGE SIZE		
3" Hinge		3-1/2" Hinge
4" Hinge		4-1/2" Hinge
5" Hinge		5-1/2" Hinge
Other: Please Specify		

ADDITIONAL CUTOUTS	
	4th Cutout Height From Top
	Custom Template #

CUSTOMER NOTES

PLEASE ATTACH TEMPLATE OR DRAWING IF DIMENSIONS OR CUTOUTS VARY FROM STANDARD OPTIONS.