

P2 VELO™ PRIVACY SCREEN: ADD-ON TO EXISTING VISION LITES—PS REV B

An Attractive, Cost-Effective Way to Add a Velo Privacy Shade to Existing Vision Lites, — Provides Complete Black-out, Attaches in Seconds. US Patent-pending. UL- Listed for up to 90 Minute Doors. Now in Sizes to Fit up to 30" x 36" Half Lites!




SPECIFICATIONS:

Construction:	1-1/4" x 1/4" frame on 4 sides with radius corners, mitered and welded. 7/8" deep slots on both sides do not allow any light—even on the edges.
Material:	18 gauge aluminum frame. Roller Unit extends 1" from frame face.
Roller:	A spring-operated roller in an aluminum housing with black endcaps allows for controlled opening and closing of the unit. Push-button latch releases shade which is retracted into the roller housing.
Shade:	A special durable 100% opaque, black, light blocking fabric material, is attached to a rigid pull-down bar mounted into the side channels. The shade slides up and down with ease and locks into position when latched.
Sizes:	Minimum UL-listed size 13" x 13" or 169 in ² , Maximum 31 3/8" W x 37 3/8" H. Minimum non-UL-listed size 5" W x 7" H, Maximum 31 3/8" W x 37 3/8" H.
Installation:	Attach to installed vision lite using 1/2" wide 3M Dual Lock™ provided. Thickness of the vision lite or construction material does not matter as long as there is a flat 5/8" frame on which to mount the privacy screen.
UL10c UL-Listing:	Tested to maintain existing door, vision kit and glazing ratings up to 90 minutes for: Steel and wood doors, both temp-rise and non temp-rise. The Velo Privacy Screen must be attached to a metal vision frame kit, not to the door itself, wood vision frame kits or to wood stops. UL-listed models for side lites, transoms and borrowed lite assemblies and installation on non-metal frame kits are not available at this time, but are in development. See File # R38628



3M Dual Lock® Attachment to Vision Lite

Typical Vision Lite with Velo Privacy Screen Installed Side View

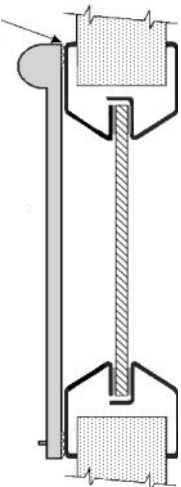

STEP 1:

Measure Existing Vision Frame Dimensions - See FIG A - Measure the Outside Dimensions of your Vision Frame ____" Wide by ____" High **THIS IS YOUR ORDER SIZE**

STEP 2: UL-listed door only - make sure that minimum size for is at least 13" W x 13" H, and that door is metal. (Non-rated doors can be smaller and be mounted on other door types)

STEP 3: Select powder coat paint color ____ Bronze ____ Silver ____ Other color code from website.

STEP 4: ____ Quantity

STEP 5: Signature Required to start order: _____

Signer agrees that dimensions provided in Step 1 are correct - Custom sizes are not refundable.



Measure to Outside of Vision Lite Frame Example Shown is 27 3/8" H

FIG A. Measure the Outside Dimensions of Your Vision Frame.

ORDER SIZE = VISION LITE FRAME OUTSIDE DIMENSIONS

Interpretation of Fire and Building Codes May Vary. Consult with the Local Authority Having Jurisdiction (AHJ) to determine appropriate standards.

 <small>CONSTRUCTION PRODUCTS GROUP</small>	Distributor:	<i>Signer agrees that dimensions provided in Step 1 are correct - Custom sizes are not refundable.</i>
	Architect:	
	Contractor:	
	Project:	Date:
		Version: ALPDS1612
800-554-6077 QUOTES@ACTIVARCPG.COM ORDERS@ACTIVARCPG.COM SALES@ACTIVARCPG.COM Fax: 952-835-2218		
VISIT WWW.ACTIVARCPG.COM FOR THE MOST UPDATED PRODUCT INFORMATION BEFORE ORDERING • © ACTIVAR CONSTRUCTION PRODUCTS GROUP, INC 2016 MFG: COMMERCE CA, BLOOMINGTON, MN • WAREHOUSES: LANCASTER PA, ATLANTA GA, CHICAGO IL, SEATTLE WA, FORT MYERS FL, DALLAS TX, FARGO ND, OMAHA NE		