


**Low Profile Beveled Vision Lite For Fire Rated Doors. Corridor Side of Door is Free of Fasteners
For Glazing thickness of up to 1-11/16". UL & Intertek Warnock Hersey Listed for 1" to 3" Thick Doors.**

SPECIFICATIONS:

Material:	20 gauge CRS frame. Min. size 3" x 3", max. 60" x 104". See Fire Rating Below.
Construction:	1-1/4" trim with radius corners, mitered and welded. Continuous glass retainer, countersunk mounting holes in the bevel on non-corridor side. For glazing thicknesses larger than 1", the VSIG frame will not be flush with the door. Contact Customer Service for protrusion value.
Door:	Specify door thickness: _____ 1" to 3". Door cutout = order size.
Fasteners:	#8 x 1" flathead phillips SMS to match finish.
Powder Coat Finishes:	____ (B) Mineral Bronze (stock color) ____ (BK) Black ____ (FB) Flat Black ____ (W) White ____ (SB) SC Beige ____ (SI) Silver ____ (BA) Brass ____ (S) Sand ____ (G) Gray ____ (AB) AMS Beige ____ View Color Samples Online
Glass:	Specify Glass Thickness: _____ " Up to 1-11/16" Visible light is 2" under rough opening size. Glass is 1" under order size. Up to 1-11/16" glazing to be ordered separately. Use fire rated glazing with Intertek Warnock Hersey or UL classification markings for fire rated applications. If glazing is being provided by a supplier other than Air Louvers, coordinate with the supplier to ensure compatibility with IG kits. Air Louvers Glazing to fit this Product: KFRL, KFRU, CT45, CT60, ARM. Also Compatible with Non 1-3/4" Doors: WS, PYRO, PYRAN, KFRF.
Fire-Rating, Testing & Listings:	When installed in properly rated and approved door, ratings up to 3 hours can be achieved for VSIG, depending on the glazing used. See glazing ratings for max exposed area. Tested and Listed for UL10C and Criteria of UBC 7-2 Positive Pressure. VSIG vision frames are UL listed and labeled unless WHI Listing selected below: ____ Optional Intertek Warnock Hersey WHI listed and labeled

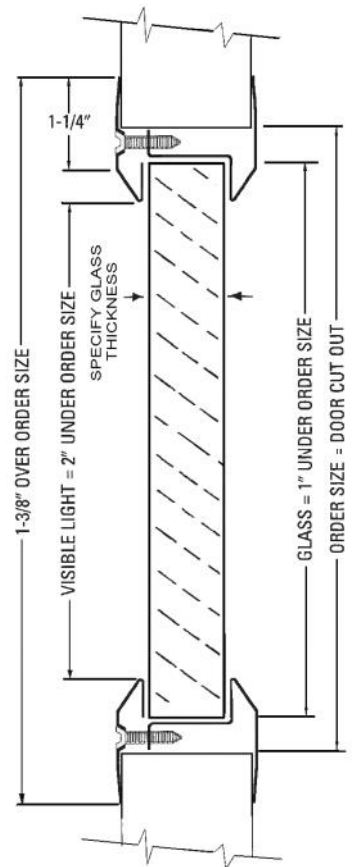

OPTIONS AT ADDITIONAL COST:

UL10 C Installation:	____ Additional intumescent tape for Positive Pressure UL10C. See detailed installation instructions.
Finishes & Materials:	____ (S) 20 Gauge Stainless Steel: #4 Finish. ____ (G) Galvanneal ____ (E) Zinc Plated ____ VWLIG—Wood Veneer ____ Veneer code, see website (up to 90 minutes)
Fasteners:	____ Torx ____ Other: _____
Mullions:	Factory welded to vision lite & painted. See Mullions Page in this section to order.

STOCK ITEM - MANY STANDARD SIZES OF VSIG IN STOCK FOR NEXT DAY SHIPMENT FROM SEVERAL WAREHOUSES

Order Format: VSIG _____ **Example: VSIG 1818B 01**
Option S,G,E W H Color Glass Thickness

Interpretation of Fire and Building Codes May Vary. Consult with the Local Authority Having Jurisdiction (AHJ) to determine appropriate standards.

<p>© 2021 Activar Construction Products Group, Inc.</p>	Distributor: _____	Width: _____ x Height: _____
	Architect: _____	Quantity: _____
	Contractor: _____	Enter Glass & Door Thickness Above
	Project: _____	Date: _____ Version: 6/24/21
<p>800-554-6077 QUOTES@ACTIVARCPG.COM ORDERS@ACTIVARCPG.COM SALES@ACTIVARCPG.COM VISIT WWW.ACTIVARCPG.COM FOR THE MOST UPDATED PRODUCT INFORMATION BEFORE ORDERING MFG: COMMERCE CA, BLOOMINGTON, MN • WAREHOUSES: SEE WEBSITE FOR LOCATIONS</p>		