


# SLIMLINE™ VISION LITE FOR 5/16" to 1-11/16" GLASS: VSIG

V3

Low Profile Beveled Vision Lite For Fire Rated Doors. Corridor Side of Door is Free of Fasteners  
For Glazing thickness of 5/16" to 1 11/16". UL-Listed Models Now Available for 1" to 3" Thick Doors.

## SPECIFICATIONS:

<b>Material:</b>	20 gauge CRS frame. Min. size 3" x 3", max. 60" x 104". See Fire Rating Below.
<b>Construction:</b>	1-1/4" trim with radius corners, mitered and welded. Continuous glass retainer, countersunk mounting holes in the bevel on non-corridor side.
<b>Door:</b>	___ <b>UL Listing:</b> 1" to 3". <b>Specify door thickness:</b> _____ ___ <b>WHI Listing:</b> For 1-3/4" door. <b>Door cutout = order size.</b>
<b>Fasteners:</b>	#8 x 1" flathead phillips SMS to match finish.
<b>Powder Coat Finishes:</b>	___ (B) Mineral Bronze (stock color) ___ (BK) Black ___ (FBK) Flat Black ___ (W) White ___ (SB) SC Beige ___ (SI) Silver ___ (BRA) Brass ___ (S) Sand ___ (G) Gray ___ (AB) AMS Beige <b>View Color Samples Online</b>
<b>Glass:</b>	___ " <b>Glass Thickness Will Be Used for this Order. Select Door Above.</b> <b>UL Listing: 5/16" to 1 11/16", WHI Listing: 5/16" to 1"</b> , glazing to be ordered separately from <b>Glazing Section</b> of catalog. Use fire rated glazing with Warnock Hersey (WHI) or UL classification markings for fire rated applications. Visible light is 2" under rough opening size. <u>Glass is 1" under order size.</u> Must specify glass thickness above. If glazing is being provided by a supplier other than Air Louvers, coordinate with the supplier to ensure compatibility with IG kits. <b>Air Louvers Glazing to fit this vision frame: KFRL, KRFU, CONTRA45, CONTRA 60, ARMRSIELD.</b> <b>1/4" Fire-Rated Air Louvers glazing can be used with this frame in cases where door thickness is other than 1-3/4": WS, PYRO, PYRAN, KFRF.</b>
<b>Fire-Rating, Testing &amp; Listings:</b>	When installed in properly rated and approved door, ratings up to 3 hours can be achieved for VSIG, depending on the glazing used. See glazing ratings for max exposed area. Tested and Listed for UL 10C and Criteria of UBC 7-2 Positive Pressure.

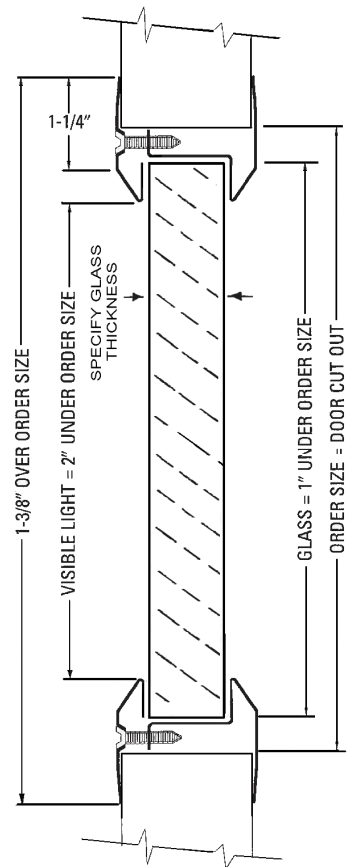

## OPTIONS AT ADDITIONAL COST:



<b>UBC 7-2 Installation:</b>	___ Fire Rating can be achieved for VSIG. See detailed installation instructions.
<b>Finishes &amp; Materials:</b>	___ (S) 20 Gauge Stainless Steel: #4 Finish. ___ (G) Galvanized Sheet for Exterior Applications. ___ (E) Electro Zinc Plating for Maximum Corrosion Resistance. ___ <b>VWVIG</b> —Wood Veneer Finish (up to 90 minutes)— <a href="#">View Selection Here</a>
<b>Fasteners:</b>	___ Torx ___ Other: _____
<b>Mullions:</b>	Factory welded to vision lite & painted. See Mullions Page in this section to order.
<b>Privacy Screen:</b>	Add the Velo Privacy Screen to this vision lite— <a href="#">See Web Page for Details</a>
<b>Custom:</b>	Contact customer service for special orders.

**STOCK ITEM - MANY STANDARD SIZES OF VSIG IN STOCK FOR NEXT DAY SHIPMENT FROM SEVERAL WAREHOUSES**

**Order Format: VSIG** \_\_\_\_\_ **Example: VSIG 1818B 01**  
Option S,G,E W H Color Glass Thickness

Interpretation of Fire and Building Codes May Vary. Consult with the Local Authority Having Jurisdiction (AHJ) to determine appropriate standards.

<p>© 2019 Activar Construction Products Group, Inc.</p>	<b>Distributor:</b> _____	<b>Width:</b> _____ <b>x Height:</b> _____
	<b>Architect:</b> _____	<b>Quantity:</b> _____ <b>Door Thickness:</b> _____
	<b>Contractor:</b> _____	<b>Glass Thickness:</b> _____
	<b>Project:</b> _____	<b>Date:</b> _____ <b>Version:</b> ALPDS1901
<p>800-554-6077 <a href="mailto:QUOTES@ACTIVARCPG.COM">QUOTES@ACTIVARCPG.COM</a> <a href="mailto:ORDERS@ACTIVARCPG.COM">ORDERS@ACTIVARCPG.COM</a> <a href="mailto:SALES@ACTIVARCPG.COM">SALES@ACTIVARCPG.COM</a>                  VISIT <a href="http://WWW.ACTIVARCPG.COM">WWW.ACTIVARCPG.COM</a> FOR THE MOST UPDATED PRODUCT INFORMATION BEFORE ORDERING                  MFG: COMMERCE CA, BLOOMINGTON, MN • WAREHOUSES: LANCASTER PA, ATLANTA GA, CHICAGO IL, SEATTLE WA, FORT MYERS FL, DALLAS TX, FARGO ND, OMAHA NE</p>		