


SLIMLINE™ VISION KITS FOR 3/16-1/4" GLASS: VSL, VSLR, VWL

Low Profile Beveled Vision Lite For Fire Rated Doors. Self-Attaching for Glass 3/16" to 1/4"
Frame Has Single-side Fasteners. Available in Round Shapes or Wood Veneer

SPECIFICATIONS:

Material:	20 gauge CRS frame. Min Size 3" x 3", Max 60" x 104". See Fire Rating Below.
Construction:	1-1/4" trim with radius corners, mitered and welded. Continuous glass retainer, countersunk mounting holes in the bevel on non-corridor side.
Door:	For 1-3/4" door. For other sizes, see models VSIG, VLFIG & VLFEZIG. Door cutout = order size.
Fasteners:	# 8 x 1" flathead phillips SMS to match finish. <u>Woodlite</u> has wood veneer plugs covering screw heads.
Powder Coat Finishes:	<input type="checkbox"/> (B) Mineral Bronze <input type="checkbox"/> (G) Gray (stock colors for VSL) <input type="checkbox"/> (BK) Black <input type="checkbox"/> (FB) Flat Black <input type="checkbox"/> (W) White <input type="checkbox"/> (SB) SC Beige <input type="checkbox"/> (SI) Silver <input type="checkbox"/> (BA) Brass <input type="checkbox"/> (S) Sand <input type="checkbox"/> (AB) AMS Beige
	View Color Samples Online
Glass:	3/16" - 1/4" glazing to be ordered separately from glazing submittals. Visible light is 2" under rough opening size. Glass size is 1" under order size. Use fire rated glazing with Intertek Warnock Hersey (WHI) or UL classification markings for fire rated applications. Fire-Rated Air Louvers Glazing to fit this Product: WS, KFRF, PYRO, and PPF.
Fire-Rating, Testing & Listings:	When installed in properly rated and approved door, ratings up to 3 hours can be achieved for VSL and SLR, depending on the glazing used . See glazing ratings for max exposed area. Tested and Listed for UL10C and Criteria of UBC 7-2 Positive Pressure. See detailed installation instructions.

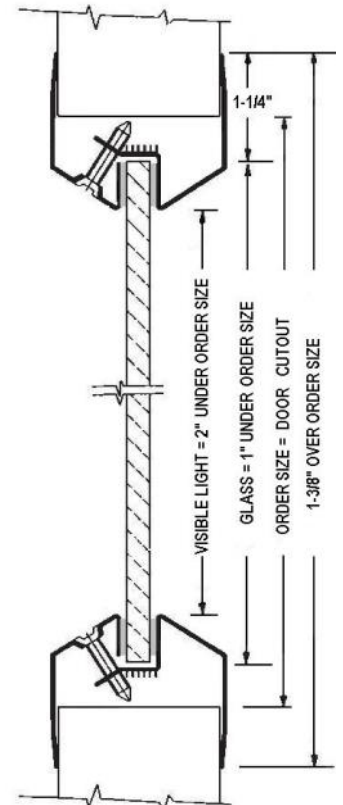

OPTIONS AT ADDITIONAL COST:



PAK:	Includes Vision Lite, Glass Sized to Fit, Applied Glazing tape for UL10B Installations, Securely Packaged Individually. See separate PAK submittals.
UBC 7-2 Installation:	<input type="checkbox"/> Additional intumescent tape for Positive Pressure UL10C . See detailed installation instructions. NOTE: Intumescent tape NOT needed for 20 Minute Wood doors for UL Label.
Finishes & Materials:	<input type="checkbox"/> (S) 20 Gauge Stainless Steel: #4 Finish. <input type="checkbox"/> (G) Galvanneal <input type="checkbox"/> (E) Zinc Plated
Woodlite Wood Veneers:	<input type="checkbox"/> VWL .010 Wood Veneer. (N/A VSLR or Mullions) <i>Does not have wood finish, supplied by others</i> Sizes: Min 4" x 4", Max 48" x 77". Rated up to 90 mins. <input type="checkbox"/> Veneer Type: (MA) Maple, (WB) White Birch, (RO) Red Oak, (CH) Cherry. See website for more wood codes and photos. Samples upon request.
Fasteners:	<input type="checkbox"/> Torx <input type="checkbox"/> Other: _____
Mullions:	Factory welded to vision lite & painted. See Mullions Page in this section to order.
Round Lite Two Sizes:	<input type="checkbox"/> VSLR 12B: One piece, 20 gauge, bronze. 11" glazing. (N/A (S) or (G) material) <input type="checkbox"/> VSLR 18B: One piece, 20 gauge, bronze. 17" glazing. (N/A (S) or (G) material)
Custom:	Contact customer service for special orders.

STOCK ITEM - MANY STANDARD SIZES OF VSL FRAMES IN STOCK FOR NEXT DAY SHIPMENT FROM ALL WAREHOUSES

Order Format:

VSL, VSLR, VWL Option S,G,E W H Color

Example: VSL 1212W

Interpretation of Fire and Building Codes May Vary. Consult with the Local Authority Having Jurisdiction (AHJ) to determine appropriate standards.

<p>© 2021 Activar Construction Products Group, Inc.</p>	Distributor:	Width: _____ x Height: _____
	Architect:	Quantity:
	Contractor:	Model:
	Project:	Date: _____ Version: 8/2/21
800-554-6077 QUOTES@ACTIVARCPG.COM ORDERS@ACTIVARCPG.COM SALES@ACTIVARCPG.COM VISIT WWW.ACTIVARCPG.COM FOR THE MOST UPDATED PRODUCT INFORMATION BEFORE ORDERING MFG: COMMERCE CA, BLOOMINGTON, MN • WAREHOUSES: SEE WEBSITE FOR LOCATIONS		