
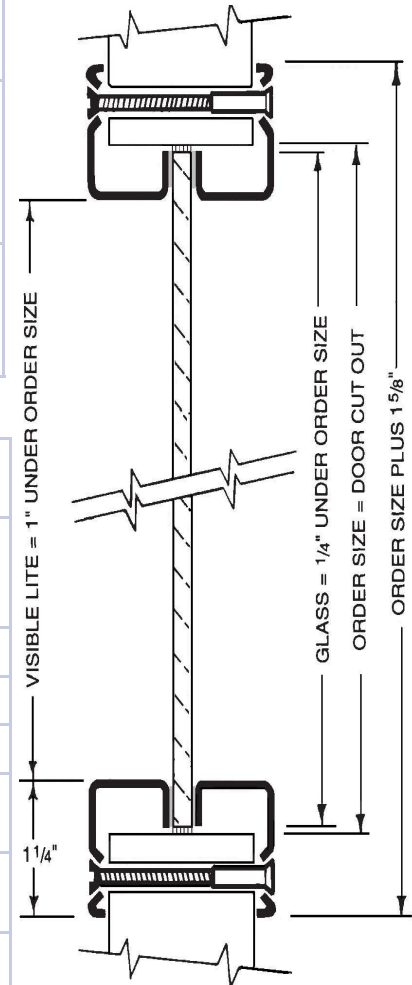


Standard, Multi-Purpose, Thru-Bolted Square Profile Vision Lite for Up to 1/4" Thick Glazing


SPECIFICATIONS:

Material:	18 gauge CRS frame. Min Size 3" x 3", Max 60" x 104". See Fire Rating Below.
Construction:	1-1/4" trim with radius corners, mitered and welded. Countersunk mounting holes on both sides.
Door:	For 1-3/4" door. For other sizes, see models VSIG, VLFIG & VLFEZIG. Door cutout = order size.
Fasteners:	#8 x 32 flathead phillips head thrubolts with blank heads one side to match finish.
Powder Coat Finishes:	___ (B) Mineral Bronze (standard color) ___ (G) Gray ___ (BK) Black ___ (FBK) Flat Black ___ (W) White ___ (SB) SC Beige ___ (SI) Silver ___ (BRA) Brass ___ (S) Sand ___ (AB) AMS Beige View Colors Online
Glass:	3/16" - 1/4" glazing to be ordered separately from Glazing Section of catalog. Use fire rated glazing with Warnock Hersey (WHI) or UL classification markings for fire rated applications. Visible light is 1" under rough opening size. <u>Glass size is 1/4" under order size.</u> Fire-Rated Air Louvers Glazing to fit this vision frame: WS, KFRF, PPF.
Fire-Rating, Testing & Listings:	When installed in properly rated and approved door, ratings up to 3 hours can be achieved, depending on the glazing used. See glazing ratings for max exposed area. Tested and Listed for UL 10C and Criteria of UBC 7-2 Positive Pressure. See detailed installation instructions.



OPTIONS AT ADDITIONAL COST:




UBC 7-2 Installation:	___ Additional intumescent tape for Positive Pressure UL10C . See detailed installation instructions.
Finishes & Materials:	___ (S) 18 Gauge Stainless Steel: #4 Finish. ___ (G) Galvanized Sheet for Exterior Applications. ___ (E) Electro Zinc Plating for Maximum Corrosion Resistance.
Fasteners:	___ Torx ___ Other: _____
Mullions:	Factory welded to vision lite & painted. See Mullions Page in this section to order.
Custom:	PAK, leadlined or special orders—contact customer service.
Round Frame:	___ " Diameter 12", 18", 24" common. Min. 6" diameter, max 60" diameter. 
Privacy Door:	VLFPVC 16 gauge door on continuous hinges welded to vision lite. (Not F.R.) Minimum size 4" x 4", max size 60" x 60". See Privacy Options Tab.
Privacy Screen:	Add the Velo Privacy Screen to This Vision Lite— See Web Page for Details

Order Format: VLF

Option S,G,E W H Color

Example: VLF 1212FBK

Interpretation of Fire and Building Codes May Vary. Consult with the Local Authority Having Jurisdiction (AHJ) to determine appropriate standards.

 <p>© 2019 Activar Construction Products Group, Inc.</p>	Distributor: _____	Width: _____ x Height: _____
	Architect: _____	Quantity: _____
	Contractor: _____	Model: _____
	Project: _____	Date: _____ Version: ALPDS1901

800-554-6077 QUOTES@ACTIVARCPG.COM ORDERS@ACTIVARCPG.COM SALES@ACTIVARCPG.COM

VISIT WWW.ACTIVARCPG.COM FOR THE MOST UPDATED PRODUCT INFORMATION BEFORE ORDERING

MFG: COMMERCE CA, BLOOMINGTON, MN • WAREHOUSES: LANCASTER PA, ATLANTA GA, CHICAGO IL, SEATTLE WA, FORT MYERS FL, DALLAS TX, FARGO ND, OMAHA NE