


# STANDARD VISION LITE FOR 5/16" 1 1/2" GLASS & UP TO 3" DOOR: VLFEZIG LEADLINED


Beveled Profile Vision Lite " for Glass Thicknesses up to 1-11/16". Several Lead Thicknesses Available, and Options for Leadlined Glass. Not a Fire-Rated Product.

## SPECIFICATIONS:

<b>Material:</b>	20 gauge CRS frame. Min. size 3" x 3", max 60" x 104".
<b>Construction:</b>	1-1/4" trim with radius corners, mitered and welded. Continuous glass retainer, countersunk mounting holes either in the bevel or on the face of the non-corridor side, depending on thickness required. Frame projects 3/8".
<b>Door:</b>	For 1" - 3" thick. Specify door thickness: _____ <b>Door cutout = order size.</b>
<b>Fasteners:</b>	#8 x 1" flathead Phillips SMS to match finish.
<b>Powder Coat Finishes:</b>	_____ (B) Mineral Bronze (standard color) _____ (BK) Black _____ (FBK) Flat Black _____ (W) White _____ (SB) SC Beige _____ (SI) Silver _____ (BRA) Brass _____ (S) Sand _____ (G) Gray _____ (AB) AMS Beige <b>View Colors Online</b>
<b>Glass:</b>	_____ " <b>Glass Thickness Will Be Used for this Order</b> 5/16" - 1-11/16" glazing to be ordered separately from <b>Glazing Section</b> below. Visible light is 2" under rough opening size. <u>Glass size is 1" under order size.</u> Must specify glass thickness above. If glazing is being provided by a supplier other than Air Louvers, coordinate with the supplier to ensure compatibility with Air Louvers IG kits.
<b>Lead Lining:</b>	_____ 1/16" (.0625", 1.5875 mm) thickness lead sheeting applied to inside of frame.



Leadlining Shown Below in Yellow

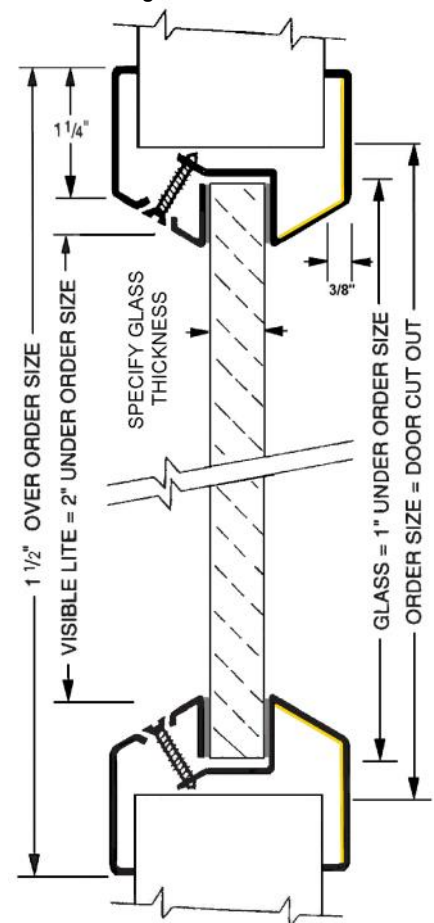

**Note: customer must order x-ray glass and vision lite to the same protective shielding level as lead lined door. Consult local health physicist to determine lead requirements.**

## OPTIONS AT ADDITIONAL COST:

<b>Lead Lining on Vision Kit:</b>	_____ 5/64" (.0781", 1.9844 mm) thickness _____ 3/32" (.0937", 2.3812 mm) thickness _____ Other: Specify: _____
<b>Finishes &amp; Materials:</b>	_____ (S) 18 Gauge Stainless Steel: #4 Finish. _____ (G) Galvanized Sheet for Exterior Applications. _____ (E) Electro Zinc Plating for Maximum Corrosion Resistance. _____ Optional colors. Please provide color chip & contact Customer Service.
<b>Fasteners:</b>	_____ Torx _____ Other: _____
<b>LGSHIELD Leaded Glazing:</b>	_____ 2.0 mm Lead Equivalent (.078") 5/16" glass (see separate data sheet for more information on LGSHIELD glazing) _____ 2.4 mm Lead Equivalent (.095") 5/16" glass _____ 3.2 mm Lead Equivalent (.126") 5/8" glass _____ 4.0 mm Lead Equivalent (.157") 5/8" glass _____ Other Lead Equivalent: _____ _____ Tinted or obscure patterns _____ Optically Clear Glass

<p>© 2018 ACTIVAR CONSTRUCTION PRODUCT GROUP, INC.</p>	Distributor:	Width: _____ x Height: _____
	Architect:	Quantity:
	Contractor:	Fill in Door Thickness and Glass Thickness Above:
	Project:	Date:

HEADQUARTERS: 9702 NEWTON AV S, BLOOMINGTON, MN 55431 PH: 800-554-6077 FAX: 952-835-2218 12/27/18  
 EMAIL: SALES@AIRLOUVERS.COM • WWW.ACTIVARCPG.COM/AIR-LOUVERS • © 2017 ACTIVAR CONSTRUCTION PRODUCT GROUP, INC.

MANUFACTURING: BLOOMINGTON MN/COMMERCE CA • WAREHOUSES: LANCASTER PA, ATLANTA GA, CHICAGO IL, DALLAS TX, SEATTLE WA, FORT MYERS FL, OMAHA NE, FARGO ND