

JL Industries innovative line of fire-rated access panels for every type of installation meets testing standards: UBC 43-7, UL10B, CAN/ULC-S104, ASTM E152, ASTM E119. Access panels are rated to 1-1/2 hours for vertical surfaces and 1 hour combustible/3 hour non-combustible horizontal surfaces. All models feature a 2" thick insulated door and spring-assisted closer. A second spring is included on sizes 16" x 16" thru 24" x 36" and must be used for the ceiling fire-rating on these sizes. Panels packaged individually. Minimum size 8" x 8".

**FDW: Wallboard Bead (Wall or Ceiling)**

**Frame:** 16 gauge with 1" drywall bead that can be taped for a smooth appearance.  
**Door:** 2" thick, insulated 20 gauge steel with continuous hinge.  
**Finish:** White powder coat.  
**Lock:** Universal turn ring and key lock (U)



**FDP: Recessed for Application of Plaster (Wall or Ceiling)**

**Frame:** 16 gauge with plaster flange recessed from face 3/4".  
**Door:** 2" thick, insulated 20 gauge steel with continuous hinge.  
**Finish:** White powder coat.  
**Lock:** Universal turn ring and key lock (U)



Inside of Wall Model

FDW

FDP

See Drawings on Page 2 for Dimensions



**Fire-Rating of FDWB & FDPW:**  
**Wall Installation:** 1-1/2 hour UL "B" label in a 2 hour fire barrier. Test # R13067-1  
**Ceiling Installation:** Warnock Hersey listed for ceiling installations with 3 hour non-combustible rating or 1 hour combustible rating. Test # WHI-495-PSH-0163. Sizes up to 24 x 36.  
**CSFM:** This product has been approved by the California State Fire Marshall (CSFM) pursuant to Section 13144.1 of the California Health and Safety Code. See CSFM Listing No 3330-1223:101 for allowable values and/or conditions for use concerning material presented in this document. It is subject to reexamination, revision and possible cancellation.

**STEP 1: SELECT MODEL NUMBER AND QUANTITY ON CHART - PAGE 2**

Door Size is Order Size.

**STEP 2: SELECT MATERIAL**

- \_\_\_\_\_ (FDW OR FDP) 20 gauge door, 16 gauge frame, Steel
- \_\_\_\_\_ (FDWG or FDPG) 20 gauge door, 16 gauge frame, Galvanized (Additional Cost)
- \_\_\_\_\_ (FDWS OR FDPs) 20 gauge door, 16 gauge frame, 304 Stainless Steel (Additional Cost)

**STEP 3: SELECT LOCK AND OPTIONAL COLOR**

- \_\_\_\_\_ (U) Standard Universal Lock with turn ring and key
- \_\_\_\_\_ **SELECT OPTIONAL LOCKS AND FEATURES BELOW AT ADDITIONAL COST**
- \_\_\_\_\_ (U3) Mortise slam lock prep for lock by others. This preparation will accept any standard 1-1/8" dia. mortise cylinder and allows you to key to new or existing master key system. Cam must have minimum "x" length of 7/16"
- \_\_\_\_\_ (U4) Mortise slam lock prep with model 06431 installed.
- \_\_\_\_\_ (U2) Slam latch with knurled knob.
- \_\_\_\_\_ Optional Color Code - [see selection in catalog or website](#), See page 2.

Please note this product model #, color codes and lock option codes have changed.


**LATCH AND LOCK OPTIONS**

Standard (U) Universal Ring/Key	Optional Knurled Knob (UK)	Optional Mortise Lock (UMI)

<p><b>ACTIVAR INC.</b> CONSTRUCTION PRODUCTS GROUP</p> <p>FDW, FDP FDWG, FDWS and DDPS ARE TRADEMARKS OF ACTIVAR PLEASE DOWNLOAD CURRENT SUBMITTAL BEFORE ORDERING</p>	Distributor:	Quantity:
	Contractor:	Approved By:
	Model #:	Architect:
	Project:	Date:


QTY FDW	QTY FDP	A		B		C				D		APPROX. SHIPPING WEIGHT In Pounds	LATCH (ES)
		MODEL SIZE	OUTSIDE FRAME DIMEN- SIONS		1- 1/2-Hour UL "B" Rated Wall		1 Hour Combustible Ceiling Opening or 3 Hour Non-Combustible Ceiling		2-3 Hour Non-Combustible Ceiling Rating (Allowance for Fire- Rated Liner of Opening)				
			WIDTH X HEIGHT	W	H	WIDTH	HEIGHT	WIDTH	HEIGHT	WIDTH	HEIGHT	WIDTH	HEIGHT
<b>Wall or Ceiling Installation</b>													
		8" X 8"	10 "	10 "	8 3/8 "	8 3/8 "	8 3/8 "	8 3/8 "	9 5/8 "	9 5/8 "	6	1	
		10" X 10"	12 "	12 "	10 3/8 "	10 3/8 "	10 3/8 "	10 3/8 "	11 5/8 "	11 5/8 "	8	1	
		12" X 12"	14 "	14 "	12 3/8 "	12 3/8 "	12 3/8 "	12 3/8 "	13 5/8 "	13 5/8 "	10	1	
		14" X 14"	16 "	16 "	14 3/8 "	14 3/8 "	14 3/8 "	14 3/8 "	15 5/8 "	15 5/8 "	12	1	
		16" X 16"	18 "	18 "	16 3/8 "	16 3/8 "	16 3/8 "	16 3/8 "	17 5/8 "	17 5/8 "	15	1	
		18" X 18"	20 "	20 "	18 3/8 "	18 3/8 "	18 3/8 "	18 3/8 "	19 5/8 "	19 5/8 "	17	1	
		20" x 20"	22 "	22 "	20 3/8 "	20 3/8 "	20 3/8 "	20 3/8 "	21 5/8 "	21 5/8 "	21	1	
		20" x 30"	22 "	32 "	20 3/8 "	30 3/8 "	20 3/8 "	30 3/8 "	21 5/8 "	31 5/8 "	28	2	
		22" x 22"	22 "	22 "	20 3/8 "	20 3/8 "	20 3/8 "	20 3/8 "	23 5/8 "	23 5/8 "	26	1	
		22" X 30"	24 "	32 "	22 3/8 "	30 3/8 "	22 3/8 "	30 3/8 "	23 5/8 "	31 5/8 "	29	2	
		22" X 36"	24 "	38 "	22 3/8 "	36 3/8 "	22 3/8 "	36 3/8 "	23 5/8 "	37 5/8 "	36	2	
		24" X 24"	26 "	26 "	24 3/8 "	24 3/8 "	24 3/8 "	24 3/8 "	25 5/8 "	25 5/8 "	27	1	
		24" X 36"	26 "	38 "	24 3/8 "	36 3/8 "	24 3/8 "	36 3/8 "	25 5/8 "	37 5/8 "	37	2	
<b>Wall Installation Only</b>													
		24" X 48"	26 "	50 "	24 3/8 "	48 3/8 "	-	-	-	-	54	2	
		30" X 30"	32 "	32 "	30 3/8 "	30 3/8 "	-	-	-	-	38	2	
		32" X 32"	34 "	34 "	32 3/8 "	32 3/8 "	-	-	-	-	43	2	
		36" X 36"	38 "	38 "	36 3/8 "	36 3/8 "	-	-	-	-	52	2	
		36" X 48"	38 "	50 "	36 3/8 "	48 3/8 "	-	-	-	-	61	2	

Optional Colors at Additional Cost - Samples Available			
G-Gray	R-Red	BK-Black/FBK Flat	SI - Silver
S-Sand	AB-AMS Beige	SB-SC Flat Beige	B-Bronze

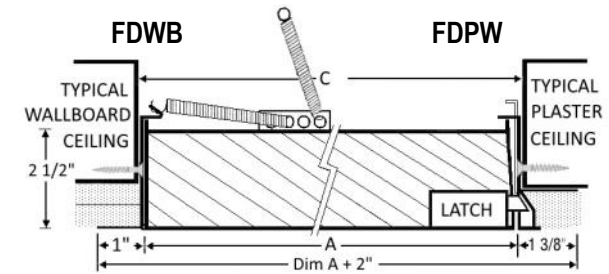

1 HOUR COMBUSTIBLE RATING - CEILING


(Similar To Wall Installation - Requires Secondary Spring to Close Door)

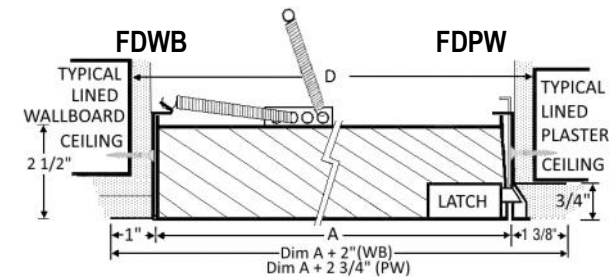

2-3 HOUR NON-COMBUSTIBLE RATING - CEILING

If Opening is to be Lined with Fire-Blocking Wallboard

(Similar To Wall Installation - Requires Secondary Spring to Close Door)

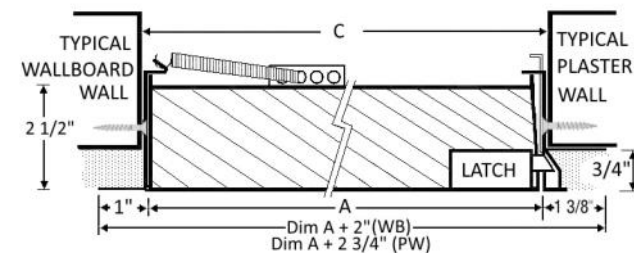

FDWB

FDPW

1-1/2 HOUR UL "B" LABEL IN A  
2 HOUR FIRE BARRIER - WALL (Top view)

Order Format: \_\_\_\_\_ - \_\_\_\_\_ - \_\_\_\_\_ Example: FDP-1212U-B  
 Model Width Height Lock (U Standard, U2 Optional  
 U3 & U4 Optional) Color