

SUBMITTAL: MODEL TMS™ STAINLESS STEEL FLUSH ACCESS PANELS

Model TMS is an all purpose stainless steel access door affords fast and convenient access for inspection or service to vital components of plumbing, heating, air conditioning and/or electrical systems. Use the TMS for hospital and restaurant applications. The 1" frame flange adds rigidity and conceals the rough wall openings. The concealed hinged door is mounted to the frame and swings open for ease in servicing and results in a door always closing square in place.

SPECIFICATIONS


Frame: 18 gauge, stainless steel with 1" wall flange. 1-5/8" depth.

Door: 16 gauge, stainless steel mounted with 90° continuous, concealed stainless steel hinge.

Finish: 304 stainless, #4 Satin finish.

Lock: Flush screwdriver-operated steel cam - C.

Sizes: Minimum 6" x 6", maximum 48" x 48"

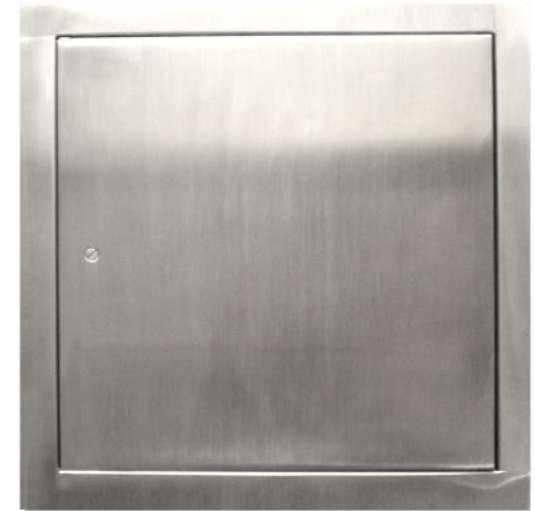

STEP 1: SELECT MODEL FROM PAGE 2 OR ENTER SIZE:

_____ For sizes not shown on chart. _____" W x _____" H (See sizes above)

STEP 2: SELECT NON-STANDARD FRAME AND DOOR OPTIONS AT ADDITIONAL COST:

_____ 14 gauge door with 16 gauge frame

_____ 16 gauge door with 14 gauge frame

_____ 14 gauge door with 14 gauge frame

STEP 3: SELECT OPTIONS AT ADDITIONAL COST

STEP 3: SELECT OPTIONS AT ADDITIONAL COST

- | | |
|---|--|
| <input type="checkbox"/> Plexiglass view window | <input type="checkbox"/> (U3) Mortise slam lock prep |
| <input type="checkbox"/> Rain Hood | <input type="checkbox"/> (U4) Mortise slam lock (06431) installed |
| <input type="checkbox"/> Gasketing | <input type="checkbox"/> (B1) Mortise deadbolt prep |
| <input type="checkbox"/> Removable Door (no hinges) | <input type="checkbox"/> (B2) Mortise deadbolt lock (06431) installed |
| <input type="checkbox"/> Stainless 316 Finish | <input type="checkbox"/> (C5) Knob cam View Lock Options Online |
| <input type="checkbox"/> Double door - see separate submittal to order | <input type="checkbox"/> (C2) Torx head cam |
| <input type="checkbox"/> (L) Cylinder lock installed | <input type="checkbox"/> (C4) Hex head cam |
| <input type="checkbox"/> (M1) Mortise cam lock prep: 1-1/8" Ø, 1-1/4" length | <input type="checkbox"/> (C3) Spanner head cam |
| <input type="checkbox"/> (M2) Mortise cam lock (06431) installed | |
| <input type="checkbox"/> #0646 Brass Retaining Ring for M1
(may be required for locks by others) | <input type="checkbox"/> Other 1-1/8" dia. mortise cylinder by request
Note details here: _____ |



Standard Cam Latch

Order Format Example: TMS-2424C

TMS - Width Height Lock - Options
 (C Std or
 Optional
 Lock/Latch Code)

Please Note - Lock Option Codes have Changed.


LATCH AND LOCK OPTIONS

Mortise Lock (M2) (U4) (B2)	Cylinder Lock (L)	Torx Head Cam (C2)	Spanner Head Cam (C3)	Hex Head Cam (C4)	Knob Cam (C5)

<p>*DOWNLOAD CURRENT SUBMITTAL BEFORE ORDERING* TMS™ IS A TRADEMARK OF ACTIVAR</p>	Distributor:	Quantity:
	Contractor:	Approved By:
	Model #:	Architect:
	Project:	Date:

© 2019 ACTIVAR CONSTRUCTION PRODUCTS GROUP, INC

Qty	A Model Size = Door Size	B Outside Frame Dimensions 1" Trim Flange		C Wall Opening Dimensions Fits ± 1/8 Opening Size		Approx. Ship Wt. (lbs)	Latch(es)
	Width X Ht	Width	Height	Width	Height		
	6" x 6"	8"	8"	6 1/2"	6 1/2"	4	1
	8" x 8"	10"	10"	8 1/2"	8 1/2"	4	1
	8" x 12"	10"	14"	8 1/2"	12 1/2"	6	1
	10" x 10"	12"	12"	10 1/2"	10 1/2"	6	1
	12" x 12"	14"	14"	12 1/2"	12 1/2"	7	1
	12" x 16"	14"	18"	12 1/2"	16 1/2"	9	1
	12" x 18"	14"	20"	12 1/2"	18 1/2"	10	1
	12" x 24"	14"	26"	12 1/2"	24 1/2"	12	2
	14" x 14"	16"	16"	14 1/2"	14 1/2"	9	1
	16" x 16"	18"	18"	16 1/2"	16 1/2"	11	1
	16" x 20"	18"	22"	16 1/2"	20 1/2"	13	2
	18" x 18"	20"	20"	18 1/2"	18 1/2"	20	3
	20" x 24"	22"	26"	20 1/2"	24 1/2"	15	4
	20" x 30"	22"	32"	20 1/2"	30 1/2"	20	4
	22" x 22"	24"	24"	22 1/2"	22 1/2"	17	4
	22" x 30"	24"	32"	22 1/2"	30 1/2"	22	4
	22" x 36"	24"	38"	22 1/2"	36 1/2"	24	5
	24" x 24"	26"	26"	24 1/2"	24 1/2"	18	4
	24" x 30"	26"	32"	24 1/2"	30 1/2"	22	5
	24" x 36"	26"	38"	24 1/2"	36 1/2"	25	5
	30" x 30"	32"	32"	30 1/2"	30 1/2"	30	5
	36" x 36"	38"	38"	36 1/2"	36 1/2"	41	5
	36" x 48"	38"	50"	36 1/2"	48 1/2"	51	6
<p>Sizes Not Shown May be Ordered in 1/4" Increments on Blank Line Above For Example 16-1/4", 16-1/2" or 16-3/4" Minimum Size 6" x 6", Max Size 48" x 48"</p>							

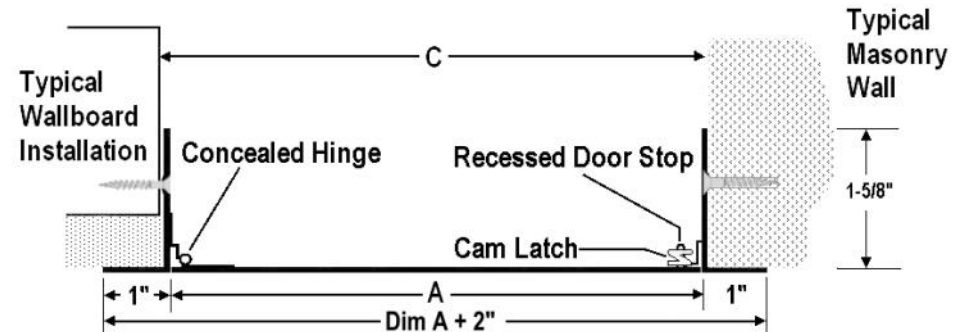

Models in Bold Above are Stocked in one or more of our [Locations](#)