
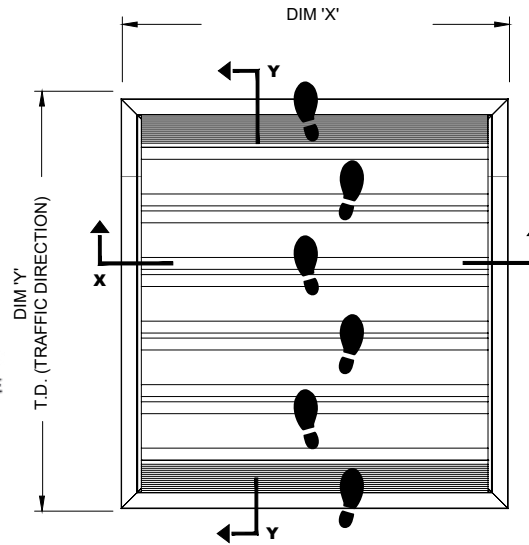


ENTRANCE MAT - Activ-Mat™ EM800 Series with EFRC8 Frame - Aluminum Mat with Cast-In Place Frame

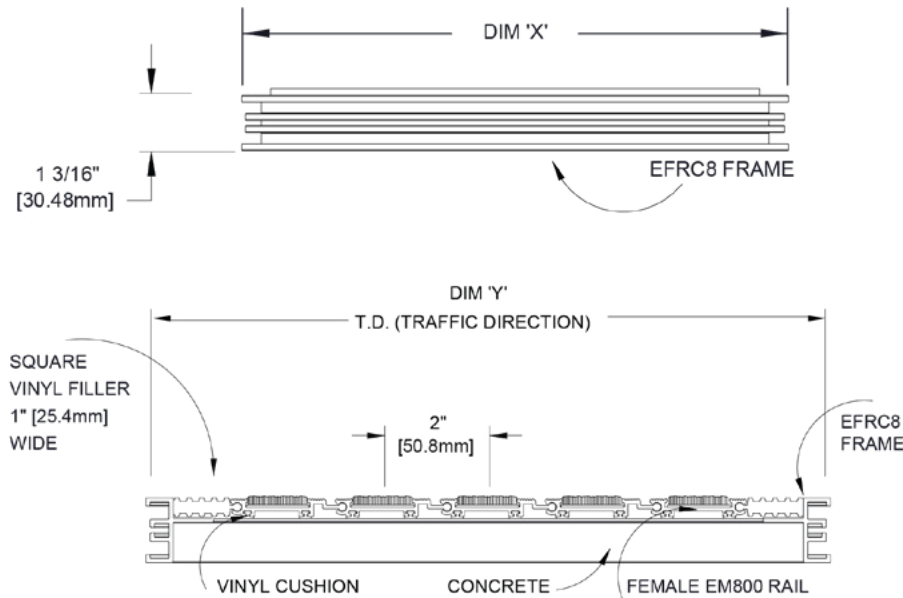

SPECIFICATIONS:

Aluminium Roll-Up Entrance Mat with Aluminum Hinges

Rail Material: 6063-T6 extruded aluminum alloy.

Frame Material: 6063-T5 extruded aluminum alloy.

Depth: 1-3/16" (30.48 mm).

Frame Width: 2" (50.8mm)

Standard Finish: Mill.

Tread Spacing: 2" (50.8mm) on center with 6 treads per foot in the direction of travel.

Spacing Between Rails: Heelproof spacing of 3/16"

Rolling Wheel Load Rating: 350 lbs

NOTE:

Verify traffic direction - traffic to run perpendicular to rails.

Maximum single section size not to exceed 12'-0" (3.66m) in width (dim "x") or 100 sq. ft.

If multiple sections, verify sectioning does not occur in traffic path.


Vinyl filler to be trimmed in field for tight fit.

Mat dimensions allow for clearance between mat section(s) and frame(s) in width (dim "x").

Additional product information including installation instructions may be found at

www.activarcpg.com/jl-industries

ACTIV-MAT 800 SERIES INSERTS



QTY	LOCATION	DIMENSION "X" <small>Width</small>	DIMENSION "Y" <small>Length</small>	FINISH	TREAD OPTIONS	TREAD COLOR	NOTES



CONSTRUCTION PRODUCTS GROUP INC. JL INDUSTRIES

9702 Newton Ave S. Bloomington, MN 55431 | Many Locations Nationwide

800-554-6077 952-835-2218 sales@activarcpg.com www.activarcpg.com

Distributor:	Project:
Contractor:	Approved By:
Date:	Architect:
Scale: N/A	Pages: 1 of 1
Item #:	