


FLOOR DOOR - RECESSED FLOOR DOOR - FLDR

This architectural floor door is designed to accommodate the installation of 1/8" tile or carpet.

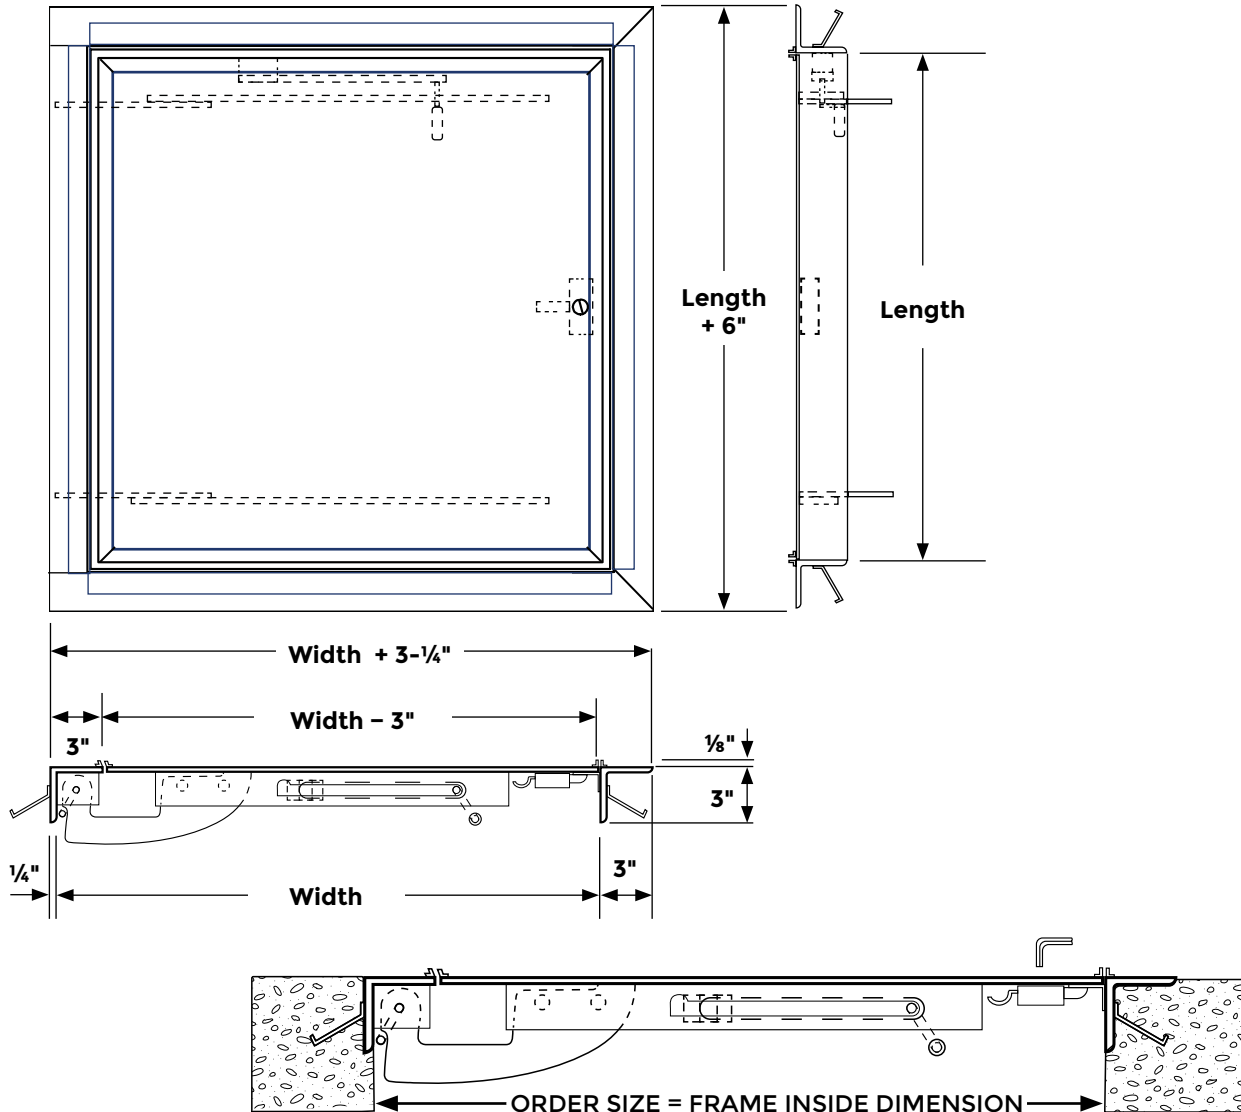

SPECIFICATIONS:

Frame Material: 1/4" x 3" x 3" angle aluminum with 1/8" lip for flooring infill and bolt-on masonry anchors.

Door Material: 1/4" aluminum smooth plate with 1/8" lip for flooring infill.

Standard Finish: Mill

Latch: Zinc plated steel slam latch with flush key operator on exterior and handle opener on inside. Chrome plated 5/16" steel square key included.

Hinge: Aluminum arm-type hinge with 304 stainless steel bolts

Spring: Cold-rolled steel 3/16" round torsion bar*

Hold Open Arm: Aluminum automatic locking hold open arm with red vinyl grip handle.*

Load: 150psf

Sizes: Minimum 24" x 24" Maximum 60" x 60"

ORDER SIZE = FRAME INSIDE DIMENSION

QTY	MODEL	ORDER SIZE		DOORS	APPROX. WEIGHT
		WIDTH	LENGTH		
	FLDR-2424S*	24"	24"	Single	60
	FLDR-3030S	30"	30"	Single	75
	FLDR-3036S	30"	36"	Single	88
	FLDR-3636S	36"	36"	Single	100
	FLDR-4242S	42"	42"	Single	135

Custom Size

ADDITIONAL OPTIONS	
304 Stainless steel slam latch	SS
Bituminous coating on outer frame	BIT
Neoprene Gasketing	NG
Door and frame with 3/16" lip for flooring infill	RL

* Hold open arm & spring not available on 24" x 24"

ACTIVAR
CONSTRUCTION PRODUCTS GROUP INC.



800-554-6077
sales@activarcpg.com
www.activarcpg.com

9702 Newton Ave S. Bloomington, MN 55431 | Many Locations Nationwide

Distributor:

Project:

Contractor:

Approved By:

Date:

Architect:

Scale: N/A

Pages: 1 of 1

Item #: