

SUBMITTAL: SHWC SAFETY RAIL FOR ROOF OPENINGS

The Saf-T-Hatch® Railing can be installed on any manufacturer's roof Hatch. This patented railing system features a clamping frame that is assembled around the curb base of roof hatch or skylight. This railing does not penetrate the curb or the roof deck - it is designed to protect your roof warranty.

Complies with OSHA CFR 29 -1910.29 when ordered with self-closing gate.

SPECIFICATIONS:

Pipe Rail: 1-5/8" O.D. A53 grade B seamed galvanized steel tubing. Grab bar provided for openings 36" or greater.

Tubing Base: Galvanized 2" x 2" 16 gauge seamed steel steel.

Tubing Base Pad: Styrofoam 3/4" thick isolated pad.

Finish: Safety yellow powder coat paint finish

Hardware: Zinc-plated threaded rods, caps, nuts, bolts and washers. Cast steel hot dipped galvanized clamps.

Chain: Zinc-plated 3/16" ASTM proof coil with hoop and rings as required

Pipe Caps: Zinc-plated.

Installation: Quickly installs by a clamping frame around curb base of roof hatch or fire hatch. Does not penetrate the roof deck or require "approved" installer. Fits all brands of existing roof hatches with cap flashing - field adjustable to fit flashing size.

STEP 1 - ENTER QUANTITY AND SELECT MODEL ON PAGE 2


STEP 2 - SELECT OPTIONAL FEATURES AT ADDITIONAL COST:

___ **SHG-2436** Self-Closing Adjustable Gate: Extends to fit roof hatches with opening size from 24" to 48". Complies with OSHA CFR 29 -1910.29 when ordered with gate.

___ **-GRAB:** Optional Welded Grab Bar for Models Narrower than 36" (Standard on Models with 36" or greater egress side opening)

Integrated RHG Steel Roof Hatch with Permanent Rail Supports - See Separate Submittal for RHG-STH


Interpretation of OSHA and Building Codes may vary. Consult with the Local Authority Having Jurisdiction (AHJ) to determine appropriate standards.

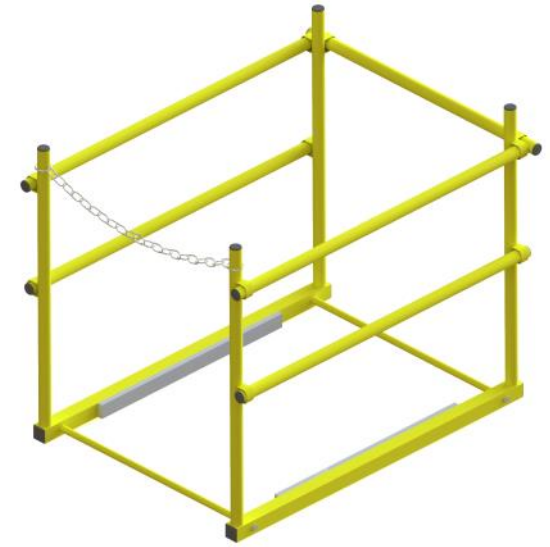

SHWC 3036 RAILING WITH STANDARD ZINC-PLATED CHAIN




SHG-2436 OPTIONAL SELF-CLOSING GATE—SEE SEPARATE SUBMITTAL FOR DETAILS


 <p>ACTIVAR CONSTRUCTION PRODUCTS GROUP INC.</p> <p>9702 NEWTON AVE S, BLOOMINGTON, MN 55431</p>	PH: 800-554-6077 EMAIL: SALES@ACTIVARCPG.COM WWW.ACTIVARCPG.COM	Distributor:	Quantity:
		Contractor:	Approved By:
		Model #:	Architect:
		Project:	Date:

SUBMITTAL: SAF-T-HATCH™ SAFETY RAIL FOR ROOF OPENINGS

Qty	Model Please note new part #	Curb Opening Railing Egress Side	Curb Opening	Approx Weight	Fits ACPG Roof Hatch Model	Includes Grab Bar*
	SHWC-3036	30"	36"	66 lbs	RHDA/RHDG/RHR-1	N
	SHWC-3054	30"	54"	70 lbs	RHDA/RHDG-2	N
	SHWC-3096	30"	96"	80 lbs	RHDA/RHDG-3	N
	SHWC-3636	36"	36"	68 lbs	RHDA/RHDG-4	Y
	SHWC-4848	48"	48"	75 lbs	RHDA/RHDG-5	Y (2)
NEW STANDARD SIZES NOW AVAILABLE BELOW!						
Qty	Model	Curb Opening Railing Egress Side	Curb Opening	Approx Weight	Fits Roof Hatch with Outside Curb Dimensions Length x Width	Includes Grab Bar*
	SHWC-2424	24"	24"	55 lbs	26" x 26" Min 30" x 30" Max	N
	SHWC-2430	24"	30"	60 lbs	26" x 32" Min 30" x 36" Max	N
	SHWC-2436	24"	36"	60 lbs	26" x 38" Min 30" x 42" Max	N
	SHWC-2496	24"	96"	75 lbs	26" x 98" Min 30" x 102" Max	N
	SHWC-3030	30"	30"	65 lbs	32" x 32" Min 36" x 36" Max	N
	SHWC-3648	36"	48"	70 lbs	38" x 50" Min 42" x 54" Max	Y
	SHWC-3696	36"	96"	90 lbs	38" x 98" Min 42" x 102" Max	Y

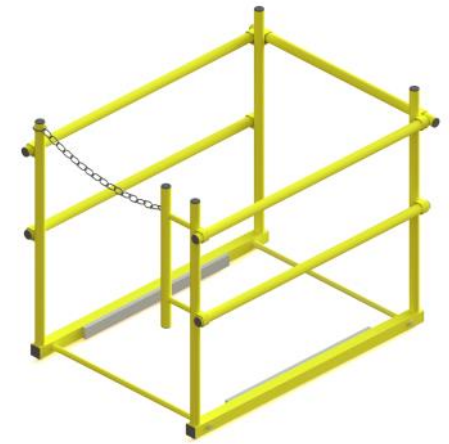

**SHWC-3636 SHOWN WITH STANDARD GRAB BAR
(Standard with 36" and Greater Egress Side Opening)**

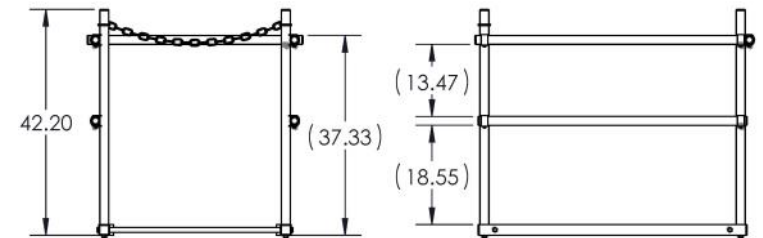

Egress View

Other View

*Grab bar is standard when egress side opening is 36" or greater.

CUSTOM SIZES AVAILABLE UPON REQUEST:

Outside Curb Dimension Egress Side: _____

Outside Curb Dimension Other Side: _____

Please attach drawing and clearly indicate egress side and location of stair or ladder.

Contact Customer Service for Custom Requests.