

LAMINATED GLAZING: LAMI

A Laminated Glass with Safety Film that Meets IBC 2012 CAT II Human Impact Safety Standards Rating and Greater STC Values than Most Single Pane Glazing.

Description:	2 Panes of heat-treated clear safety glass that break into small particles with PVB safety film interlayer.
Thickness:	1/4" (6 mm) - 3/4" (19.9 mm)
Sound Transmission:	STC 35-41
Film:	.030-.060
Fabricated:	USA
Warranty:	10 year limited warranty
Size:	Minimum 4" x 4", max. sheet size 80" x 120"

Tested in accordance with: ASTM E90, ASTM C1036, ASTM C1048, ASTM C1172, ASTM E413, ASTM E1332, ASTM E1886 & E1996, ASTM F1233.


Impact Safety Rating: CPSC 16CFR 1201 (CAT I & II).

LABELING:

**TEMPERED GLASS
16CFR 1201 C-11**

Each lite will be permanently labeled with the CPSC Rating. See Example Above

Use glazing compound or glazing tape on both sides of glass, install in an appropriately-listed and labeled vision frame. Certain optical and visual imperfections are inherent in the production process. These characteristics may be evaluated according to the manufacturer's quality standards but do not impair the transparency or affect the performance of the glass, and shall not be considered cause for rejection.

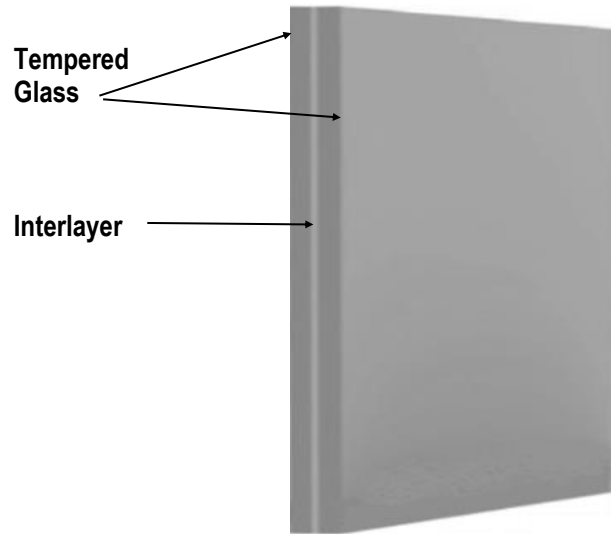

Air Louvers frames for Laminated Glass– 1/4" - VLF, VSL, VLFEZ. > 1/4" - VLFIG, VLFEZIG, VSIG, VLFS10 OR VLFS10SP

SEE OTHER DATA PAGES FOR BALLISTIC OR HURRICANE GLAZING

Qty	Model # Guide Complete W x H In Space Below	Assembly Overall Thickness	STC Value	Inside Glass Thickness	PVB Interlayer Thickness	Outside Glass Thickness
	LAMI ____ 92FV92F	1/4" (7.24 mm)	35	1/8" (3.2 mm)	0.030 (.75 mm)	1/8" (3.2 mm)
	LAMI ____ 92BV92F	3/8" (9.53 mm)	36	1/4" (6.3 mm)	0.030 (.75 mm)	1/8" (3.2 mm)
	LAMI ____ 92BK92F	5/8" (10.5 mm)	37	1/4" (6.3 mm)	0.060 (1.5 mm)	1/8" (3.2 mm)
	LAMI ____ 92BV92B	1/2" (12.1 mm)	38	1/4" (6.3 mm)	0.030 (.75 mm)	1/4" (6.3 mm)
	LAMI ____ 92BK92B	1/2" (12.1 mm)	38	1/4" (6.3 mm)	0.060 (1.5 mm)	1/4" (6.3 mm)

NOTE: This is not a fire-rate glass and should not be used as a component of a fire-rated door. Use in locations where a safety-rated only glazing is required.

If you require a fire-rated glass, consider fire and safety-rated KFRL or KFRU .

Other combinations of glass types are also available—contact customer service for more information.

	Distributor:	Quantity:
	Contractor:	Approved By:
	Size:	Architect:
	Project:	Date: REV 1/4/16

800-554-6077 QUOTES@ACTIVARCPG.COM ORDERS@ACTIVARCPG.COM SALES@ACTIVARCPG.COM FAX: 952-835-2218

VISIT WWW.ACTIVARCPG.COM FOR THE MOST UPDATED PRODUCT INFORMATION BEFORE ORDERING © ACTIVAR CONSTRUCTION PRODUCTS GROUP INC 2016
MFG: COMMERCE CA, BLOOMINGTON MN • WAREHOUSES: LANCASTER PA, ATLANTA GA, CHICAGO IL, SEATTLE WA, FORT MYERS FL, DALLAS TX, FARGO ND, OMAHA NE