


**SPECIALTY—ACOUSTICAL
ACCESS PANEL - STC SERIES— Sound Transmission Class 65**

JL Industries Acoustical STC-65 sound rated access panel for walls and ceilings helps achieve noise containment and sound transmission blocking requirements

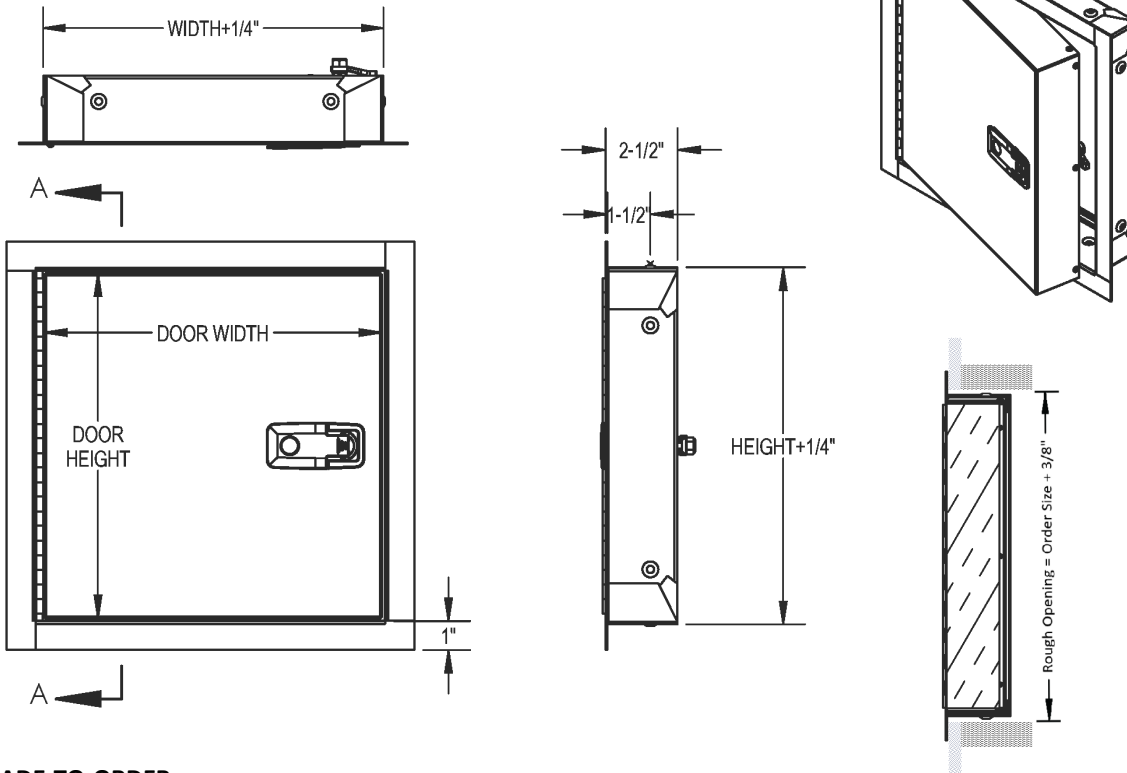

SPECIFICATIONS:

- Frame Material:** 16 gauge cold rolled steel.
- Frame Flange:** 1" exposed.
- Door Panel Material:** 20 gauge CRS steel.
- Standard Finish:** White powder coat.
- Hinge:** Continuous steel rod hinge. Opens to 170°.
- Gasketing:** EPDM foam seal on frame
- Insulation:** 2" Mineral wool.
- Latch:** (F4) Black lockable compression paddle.
- Sizes:** Minimum 8" x 8", Maximum: 36" x 36".
- Clear Opening:** Width minus 1-1/4" x Height minus 1-1/4".

PERFORMANCE:

Independently lab-tested to STC 65 and OITC 51 according to: ASTM E90. Classified in accordance with ASTM E413, and ASTM E1332.

OPTIONS:

- Optional Material:** 304 stainless steel with #4 finish, galvanneal steel.
- Optional Latches:** Black non-locking compression paddle, chrome finish lockable compression paddle.
- Additional Options:** Other powder coat colors, tubes of noise-proofing sealant for installation.

NOTES: Order size W x H = Door size. Rough opening size = order size + 3/8".

| QTY | MODEL | ORDER SIZE W x H (in) | NO. OF LATCHES | APPROX WT (lbs) |
|-----|---------------------|--------------------------|-------------------|--------------------|
| | 9STC-1212F4W | 12 x 12 | 1 | 9 |
| | 9STC-2222F4W | 22 x 22 | 2 | 21 |
| | 9STC-2424F4W | 24 x 24 | 2 | 24 |
| | 9STC-2436F4W | 24 x 36 | 2 | 35 |
| | 9STC-3636F4W | 36 x 36 | 2 | 46 |

MADE-TO-ORDER:

| | | | | | | | | | | | | | | | | | | |
|--------------------------|------------|--------------------------|--------------|--------------------------|----------------------|----------------------|----------------------|----------------------|----------------------|----------------------------------|----------------------|----------------------|--------------------------------|----------------------|----------------------|----------------------|----------------------|----------------------|
| <input type="checkbox"/> | QTY | <input type="checkbox"/> | MODEL | <input type="checkbox"/> | MATERIAL | <input type="text"/> | <input type="text"/> | <input type="text"/> | <input type="text"/> | <input type="text"/> | <input type="text"/> | <input type="text"/> | <input type="text"/> | <input type="text"/> | <input type="text"/> | <input type="text"/> | <input type="text"/> | <input type="text"/> |
| | | | 9STC | | Cold Rolled Steel | | | | | F3 (Black Flush) | | | W (White Powder Coat) | | | | | |
| | | | | | S (Stainless Steel) | | | | | F4 (Locking Flush Black) | | | G (Gray Powder Coat) | | | | | |
| | | | | | G (Galvanneal Steel) | | | | | F6 (Locking Flush Chrome) | | | BK (Black Powder Coat) | | | | | |
| | | | | | | | | | | | | | Other Powder Coat Color | | | | | |

Can be ordered in 1/4" increments

| | | | | |
|--|---|---|---|---------------------------------|
| <p>JL INDUSTRIES</p> <p>9702 Newton Av S. Bloomington, MN 55431 Many Locations Nationwide</p> | <p>800-554-6077</p> <p>sales@activarcpg.com</p> <p>www.activarcpg.com</p> | <p>Distributor:</p> <p>Contractor:</p> <p>Date:</p> <p>Scale: N/A</p> | <p>Project:</p> <p>Approved By:</p> <p>Quantity:</p> <p>Pages: 1 of 1</p> | <p>Architect:</p> <p>Item #</p> |
|--|---|---|---|---------------------------------|