

ACCESS PANELS - CAP SERIES - Non-Rated with Concealed Touch Latch for Ceilings - CAP

The Maxam CAP Series is designed to create a large clear opening for removal or maintaining pumps/equipment. The frame has an exterior flange and the double doors are formed for rigidity. One operable, one stationary, lightweight and easy to open, close or remove both doors with no visible latches or hinges.

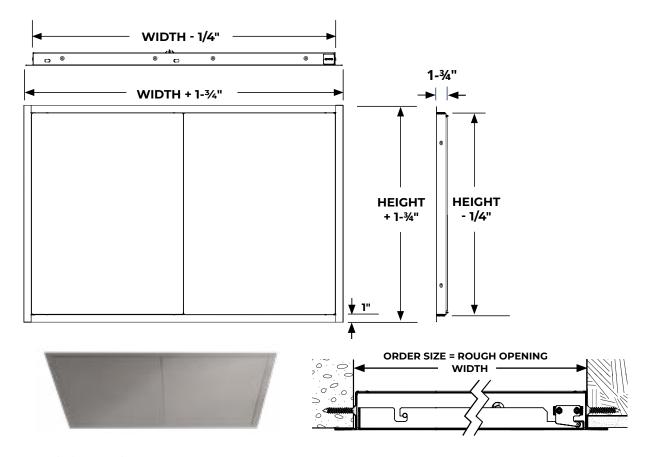

MADE-TO-ORDER CAP



Interpretation of Building Codes may vary. Consult with the Local Authority Having Jurisdiction (AHJ) to determine appropriate standards.

SPECIFICATIONS:

Frame Material: 18 gauge galvannealed steel

Door Panel Material: 20 gauge galvannealed steel

Standard Finish: Off-white prime coat

Flange: 1" wide exposed flange

Frame Depth: 1-3/4"

Safety Chain: 6" Long safety chains provided on operable

door only.

Latch: Concealed touch latches on operable door; includes a

patent pending latch mounting block.

Sizes: Minimum: 18" x 18" Maximum: 108" x 54"

Clear Opening: (Width minus 1-½") x (Height minus 1-½")

ADDITIONAL OPTIONS:

Optional Material:

304 stainless steel with #4 finish

Optional Finishes:

White powder coat, see color chart on website for other options

NOTE:

ORDER SIZE = ROUGH OPENING

Do not remove center stiffener bar before installation as the frame may warp or bend making installation difficult. After frame is installed the stiffener bar may be removed. Refer to installation instructions before installing the frame and doors.

QTY	MODEL	WIDTH X HEIGHT		
	CAPG-4228P-D	42" X 28"		
	CAPG-4236P-D	42" X 36"		
	CAPG-4848P-D	48" X 48"		
	CAPG-6028P-D	60" X 28"		
	CAPG-7228P-D	72" X 28"		

	800-554-6077	Distributor:		Project:
JL INDUSTRIES	sales@activarcpg.com	Contractor:		Approved By:
	www.activarcpg.com	Date:		Architect:
9702 Newton Ave S. Bloomington, MN 55431 Many Locations Nationwide		Scale: N/A	Pages: 1 of 1	Item #:
	DEEDLY OF ACTIVAD CONCEDUCTION DE	J	reciti #1	