

SUBMITTAL: MODEL CTW™ FLUSH ACCESS PANELS

An Access Panel with a Recessed Door and Wallboard Bead Frame for Walls or Ceilings with Heavy-duty 14 Gauge Frame

For the most unobtrusive appearance, the CTW Series is designed for an inset of gypsum wallboard to cover the door panel with exposure of only the narrow frame edges. Door is recessed to accommodate up to a 1/2" drywall insert. Attach the wallboard to the door with adhesive and ensure that it is flush with surrounding wallboard. A continuous hinge located at the outside edge of the door, ensures easy opening of the panel. Wallboard bead allows smooth finish to edge of frame.

SPECIFICATIONS:

Door Panel: 16 gauge steel, recessed to accommodate 1/2" drywall.

Frame: 14 gauge steel with 1" wide wallboard bead.

Finish: White powder coat paint.


Hinge: Continuous recessed hinge mounted on the long side of oblong panels.

Lock: Flush screwdriver-operated steel cam standard.

Sizes: Minimum 8" x 8". Maximum walls—36" x 36", ceilings—24" x 48"



Panel shown partially-covered by wallboard above

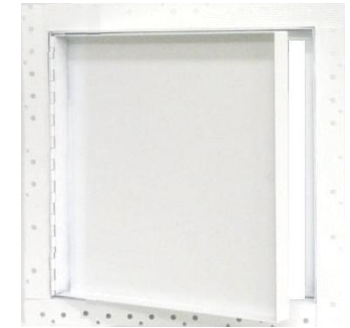

STEP 1: SELECT MODEL NUMBER AND QUANTITY ON CHART OR ENTER OTHER SIZE BELOW:

___ W x ___ H

STEP 2: SELECT MATERIAL

___ CTW Steel

___ CTWG Galvanneal Steel (Additional Cost)

STEP 3: SELECT OPTIONAL FEATURES AT ADDITIONAL COST:

- Optional color Code: ___ - see below
- (L) Cylinder lock installed
- (C2) Torx head cam
- (C4) Hex head cam
- (C3) Spanner head cam
- (M1) Mortise cam lock prep 1-1/8" dia, 1-1/4" L
- (M2) Mortise cam lock (06431) installed
- 14 Gauge frame and 14 gauge door




Standard Cam Latch


Order Format Example: **CTW-2424M2W**

CTW - ___ - ___ - ___ - ___ - ___
 CTWG **Width** **Height** **Lock (C Std or Optional Lock/Latch Code)** **Color** **Options**

LATCH AND LOCK OPTIONS				
Cylinder Lock (L)	Optional Torx Head Cam (C2)	Optional Spanner Head Cam (C3)	Optional Hex Head Cam (C4)	Mortise Lock (M2)

 JL INDUSTRIES ©2022 ACTIVAR CONSTRUCTION PRODUCTS GROUP— CTW™ IS A TRADEMARK OF ACTIVAR	Distributor:	Quantity:
	Contractor:	Approved By:
	Model #:	Architect:
	Project:	Date:
HEADQUARTERS: 9702 NEWTON AVE S, BLOOMINGTON, MN 55431 PH: 800-554-6077 EMAIL: SALES@ACTIVARCPG.COM WWW.ACTIVARCPG.COM MANUFACTURING: BLOOMINGTON, MN & COMMERCE, CA WAREHOUSES: SEE WEBSITE FOR LOCATIONS 5/6/2022		

QTY	A - MODEL SIZE = DOOR SIZE	C - WALL OPENING DIMENSIONS		APPROX. SHIP- PING WEIGHT	LATCH (ES)
	WIDTH X HEIGHT	WIDTH	HEIGHT		
	12" x 12"	12 1/4 "	12 1/4 "	9 lbs	1
	12" x 24"	12 1/4 "	24 1/4 "	14 lbs	2
	18" x 18"	18 1/4 "	18 1/4 "	15 lbs	3
	22" x 30"	22 1/4 "	30 1/4 "	26 lbs	4
	24" x 24"	24 1/4 "	24 1/4 "	24 lbs	4
	24" x 36"	24 1/4 "	36 1/4 "	35 lbs	5
	36" x 36"	36 1/4 "	36 1/4 "	53 lbs	6

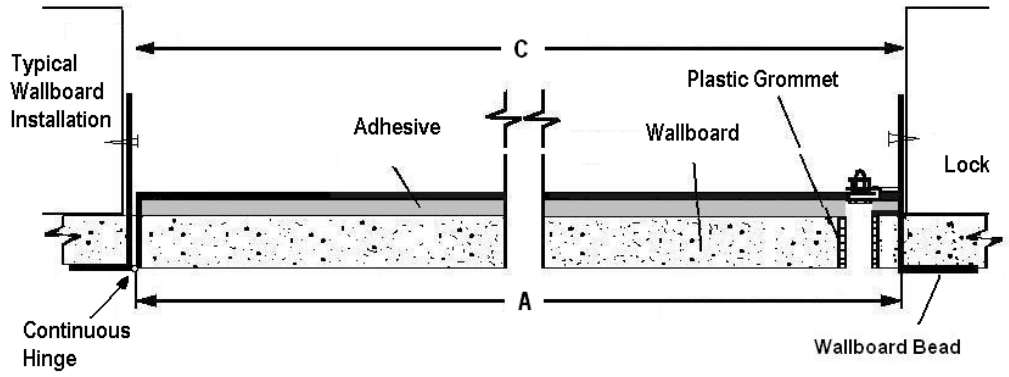

Standard Color is White, Optional Colors at Additional Cost - Samples Available

