



ACCESS PANELS & DOORS CATALOG

DIVISION 08 31 00

DIVISION 08 31 13.53

DIVISION 08 31 16

DIVISION 08 34 73

ACCESS DOORS & FRAMES

SECURITY ACCESS DOORS & PANELS

ACCESS PANELS & FRAMES

SOUND CONTROL ACCESS PANELS



ACTIVAR CONSTRUCTION PRODUCTS GROUP INC.

FIRE-RATED: ACCESS PANELS SELECTION GUIDE & INDEX

JL Industries now offers a full line of fire-rated access panels including 3 hour, double leaf and specialty models, including the largest sizes in the industry. To help you select the best model for your application - here is the new guide:

SELECT BY FIRE RATING

Listing	Use	Model	Listing	Min Size W X H	Max Size W X H	Page
1 HR Combustible	Ceiling	FD (Standard) FDS (Standard Stainless) FDW (WB Bead) FDP (Plaster Bead)	Intertek	8" x 8"	24" x 36"	3 3 4 4
1 1/2 HR "B" Label for 2 Hour Wall	Wall	FD (Standard) FDS (Standard Stainless) FDW (WB Bead) FDP (Plaster Bead)	UL	8" x 8"	48" x 48"	3 3 4 4
		FD Heavy Gauge (14g Standard) FD2W (Standard Oversized) FD2WI (In-Opening Door) FDRFW (Recessed Trim) FD2L (Laundry Garbage) FD2DW (Double Leaf)	Intertek	8" x 8" >48" W or 48" H 16" x 16" 16" x 16" 16" x 16" 18" x 18"	24" x 48" 60" W or 60" H 48" x 60" 48" x 60" 48" x 60" 60" W or 60" H	3 5 6 6 7 7
		FD (Standard) FDS (Standard Stainless) FDW (WB Bead) FDP (Plaster Bead)	Intertek	8" x 8"	24" x 36"	3 3 4 4
		FD2C (Standard Oversized) FD2RFC (Recessed Trim) FD2CTC (Recessed Trim & Door) FD2CI (Combustible, Up-Opening) FD2DC (Double Leaf)	Intertek	>24" W or 36" H 8" x 8" 8" x 8" 12" x 12" 18" x 18"	36" W x 48" H 36" x 36" 24" x 36" 36" x 36" 60" x 48"	6 6 6 6 7
		FD3W (Standard) FD3RFW (Recessed Trim) FD3DW (Double Leaf)	Intertek	12" x 12" 12" x 12" 18" x 18"	48" x 60" 48" x 60" 40" x 60"	5 6 7
2 HR Non-Combustible	Ceiling	FD (Standard) FDS (Standard Stainless) FDW (WB Bead) FDP (Plaster Bead)	Intertek	8" x 8"	24" x 36"	3 3 4 4
3 HR	Wall	FD3W (Standard) FD3RFW (Recessed Trim) FD3DW (Double Leaf)	Intertek	12" x 12" 12" x 12" 18" x 18"	48" x 60" 48" x 60" 40" x 60"	5 6 7
3 HR Non-Combustible	Ceiling	FD (Standard) FDS (Standard Stainless) FDW (WB Bead) FDP (Plaster Bead)	Intertek	8" x 8"	24" x 36"	3 3 4 4
		FD3C (Standard Oversized) FD2CI (Up-Opening) FD3DC (Double Leaf)	Intertek	>24" W or 36" H 14" x 14" 18" x 18"	36" w or 48" 32" x 32" 60" W or 60" H	5 6 7

SEE INDIVIDUAL PRODUCT PAGES FOR DETAILS ON AVAILABLE SIZES. UL - LISTED BY UL, INTERTEK - LISTED BY INTERTEK WARNOCK HERSEY

INDEX TO CATALOG

Model	Description	Page	Model	Description	Page
AT	Gasketed	13	FD3C/FD3W	Fire-Rated, 3 Hr Ceiling and Wall	5
CTE	Recessed Plaster Frame, Recessed Door	11	FD Heavy Gauge	Fire-Rated, 14 Gauge Heavy Duty	3
CT	Framless, Recessed Door	11	HSP	7 Gauge, High Security	14, 15
CTW	Wallboard Bead, Recessed Door	11	TMP, TME	Recessed Plaster Frame	10
FD, FDS	Fire-Rated, Standard, and Stainless	3	Security Locks	Security Lock Options	15
FDP	Fire-Rated, Recessed Plaster	4	SM	Surface-Mount Frame	13
FDW	Fire-Rated, Wallboard Bead	4	SP	10 Gauge, Security	14, 15
FD2C/FD2W	Fire-Rated, 2 Hr Oversized	5	STC	STC-Related Sound Blocking, Insulated	16
FD2D, FD3D	Fire-Rated Double Leaf Doors - Large Sizes	7	TM/TMG/TMS	Standard Frame/ Galvanized/ Stainless	8
FD2RF, FD3RF	Fire-Rated, Recessed Trim	6	TM Options	TM Special Features	9
FD2CI, FD3CI	Fire-Rated, Upward Opening Door, Ceiling	6	TMW	Wallboard Bead	10
FD2WI, FD3WI	Fire-Rated, Inward Opening Door, Wall	6	XPA/XPEA	Exterior, Galvanized, Insulated/Plasterguard	12
FD2L	Fire-Rated, Laundry/Garbage Door	7	XPS/XPES	Exterior, Stainless, Insulated/Plasterguard	12



FIRE-RATED FLUSH ACCESS PANELS: FD Series

FD™: Standard Panel (Wall and Ceiling):

Frame: 16 Gauge steel with a 1" flange. Welded-on masonry anchor
 Door: 2" Thick, insulated 20 gauge steel with continuous hinge
 Finish: White powder coat paint
 Latch: Universal turn ring and key lock (U)
 Sizes:
 Minimum Size: 8" x 8"
 Maximum Wall Size: 48" x 48" Maximum Ceiling Size: 24" x 36"

FDS™: Stainless Steel (Wall and Ceiling):

Frame: 16 Gauge stainless steel with 1" wall flange. Welded-on masonry anchor.
 Door: 2" Thick, insulated 20 gauge stainless steel with continuous hinge
 Finish: 304 stainless steel with #4 satin finish
 Latch: Universal turn ring and key lock (U)
 Sizes:
 Minimum Size: 8" x 8"
 Maximum Wall Size: 48" x 48" Maximum Ceiling Size: 24" x 36"

FD™: Heavy Gauge and Security (Wall):

Frame: 14 Gauge steel with 1" wall flange. Welded-on masonry anchor.
 Door: 2" Thick, insulated 14 gauge steel with continuous hinge
 Finish: White powder coat paint
 Latch: Universal turn ring and key lock (U)
 Sizes:
 Minimum Size: 8" x 8"
 Maximum Wall Size: 24" x 48"

Options: Galvanneal steel finish, knurled knob (U2), mortise sam lock prep (U3) or mortise slam lock installed (U4). Other gauges of frame and door.
 Larger Sizes: See the FD2 and FD3



MODEL FD

Fire-Rating:


UL Listed and Labeled

Wall Installation - 1-1/2 hour UL "B" label in a 2 hour fire barrier


Intertek Warnock Hersey Listed and Labeled

Ceiling Installation—3 hour non-combustible rating or 1 hour combustible rating


Latch and Lock Options

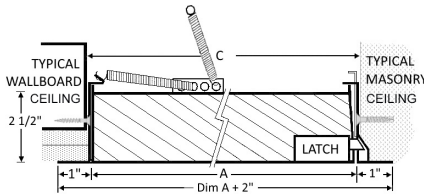

1 HR CEILING

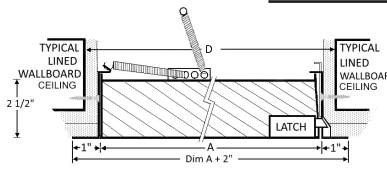

2-3 HR CEILING

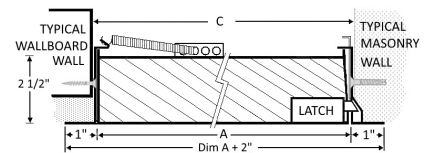

1 1/2 HOUR WALL

A Order Size = Door Size Width x Height	C 1 1/2 hour UL "B" Label 2 hour Wall		1 Hour Combustible Ceiling Opening or 3 Hour Non-Combustible Ceiling		D 2 or 3 Hour Non-Combustible Ceiling Rating (Allowance for Fire-Rated Liner of Opening)		Approximate Shipping Weight In Pounds			Number of Latches
	Width	Height	Width	Height	Width	Height	FD	FDS	FD Heavy Gauge	
8" x 8"	8 3/8"	8 3/8"	8 3/8"	8 3/8"	9 5/8"	9 5/8"	6	6	11	1
10" x 10"	10 3/8"	10 3/8"	10 3/8"	10 3/8"	11 5/8"	11 5/8"	8	8	15	1
12" x 12"	12 3/8"	12 3/8"	12 3/8"	12 3/8"	13 5/8"	13 5/8"	10	10	17	1
14" x 14"	14 3/8"	14 3/8"	14 3/8"	14 3/8"	15 5/8"	15 5/8"	12	12	22	1
16" x 16"	16 3/8"	16 3/8"	16 3/8"	16 3/8"	17 5/8"	17 5/8"	15	15	17	1
18" x 18"	18 3/8"	18 3/8"	18 3/8"	18 3/8"	19 5/8"	19 5/8"	17	18	30	1
20" x 20"	20 3/8"	20 3/8"	20 3/8"	20 3/8"	21 5/8"	21 5/8"	21	22	51	1
20" x 30"	20 3/8"	30 3/8"	20 3/8"	30 3/8"	21 5/8"	31 5/8"	28	29	53	1
22" x 22"	22 3/8"	22 3/8"	22 3/8"	22 3/8"	23 5/8"	23 5/8"	26	27	51	1
22" x 30"	22 3/8"	30 3/8"	22 3/8"	30 3/8"	23 5/8"	31 5/8"	29	30	53	2
22" x 36"	22 3/8"	36 3/8"	22 3/8"	36 3/8"	23 5/8"	37 5/8"	36	37	58	2
24" x 24"	24 3/8"	24 3/8"	24 3/8"	24 3/8"	25 5/8"	25 5/8"	27	28	47	1
24" x 36"	24 3/8"	36 3/8"	24 3/8"	36 3/8"	25 5/8"	37 5/8"	37	38	60	2
24" x 48"	24 3/8"	48 3/8"	Maximum 1 hour Combustible Ceiling Size is 24" x 36"	Maximum 2 or 3 hour Non-Combustible Ceiling Size is 24" x 36"			54	56	85	2
30" x 30"	30 3/8"	30 3/8"					38	40	Maximum FD Heavy Gauge Size is 24" x 48"	2
32" x 32"	32 3/8"	32 3/8"					43	41		2
36" x 36"	36 3/8"	36 3/8"					52	54		2
36" x 48"	36 3/8"	48 3/8"					61	64		2
48" x 48"	48 3/8"	48 3/8"					100	110		2

Custom Sizes Available Upon Request - For Larger Sizes See FD2 Series

Examples of Optional Colors at Additional Cost - Painted Samples Available


B-Bronze	R-Red	BK-Black/FB Flat	S-Sand	AB-AMS Beige	SB-Flat Beige	G-Gray	SI-Silver
----------	-------	------------------	--------	--------------	---------------	--------	-----------




MODEL FDW WITH WALLBOARD BEAD




MODEL FDP WITH RECESSED PLASTER FLANGE



1 HR CEILING

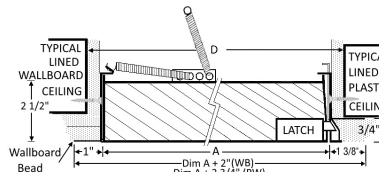

2-3 HR CEILING

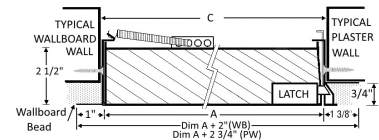

1 1/2 HOUR WALL

FIRE-RATED & INSULATED CONCEALED FRAME ACCESS PANELS: FDW™ & FDP™ Series

FDW™: Wallboard Bead (Wall or Ceiling):

Frame: 16 Gauge with 1" drywall bead that can be taped for a smooth appearance

Door: 2" Thick, insulated 20 gauge steel with continuous hinge

Finish: White powder coat paint

Latch: Universal turn ring and key lock (U)

Sizes: Minimum 8"x 8". Maximum wall 48"x 48", maximum ceiling 24"x 36".

FDP™: Recessed Plaster Flange (Wall or Ceiling):

Frame: 16 Gauge with 1 3/8" wide plaster flange recessed 3/4"

Door: 2" Thick, insulated 20 gauge steel with continuous hinge.

Finish: Gray powder coat paint

Latch: Universal turn ring and key lock (U)

Sizes:

Minimum Size: 8" x 8"

Maximum Wall Size: 48" x 48" Maximum Ceiling Size: 24" x 36"

Options: Stainless or galvalume steel, knurled knob (U2), mortise slam lock prep (U3) or mortise slam lock installed (U4), stainless FDW

Fire-Rating of FDW & FDP:

UL Listed and Labeled

Wall Installation - 1-1/2 hour UL "B" label in a 2 hour fire barrier

Intertek Warnock Hersey Listed and Labeled

Ceiling Installation—3 hour non-combustible rating or 1 hour com-bustible rating

Latch and Lock Options

Standard (U) Universal
Turn Ring & Key



Optional Knurled Knob
(U2)



Optional Mortise Lock
(U4)



A	C				D		Approximate Shipping Weight	Number of Latches
Order Size =Door Size	1 1/2 hour UL "B" Label 2 hour Wall		1 Hour Combustible Ceiling Opening or 3 Hour Non-Combustible Ceiling		2 or 3 Hour Non-Combustible Ceiling Rating (Allowance for Fire-Rated Liner of Opening)			
Width x Height	Width	Height	Width	Height	Width	Height	Lbs.	
8" x 8"	8 3/8"	8 3/8"	8 3/8"	8 3/8"	9 5/8"	9 5/8"	6	1
10" x 10"	10 3/8"	10 3/8"	10 3/8"	10 3/8"	11 5/8"	11 5/8"	8	1
12" x 12"	12 3/8"	12 3/8"	12 3/8"	12 3/8"	13 5/8"	13 5/8"	10	1
14" x 14"	14 3/8"	14 3/8"	14 3/8"	14 3/8"	15 5/8"	15 5/8"	12	1
16" x 16"	16 3/8"	16 3/8"	16 3/8"	16 3/8"	17 5/8"	17 5/8"	15	1
18" x 18"	18 3/8"	18 3/8"	18 3/8"	18 3/8"	19 5/8"	19 5/8"	17	1
20" x 20"	20 3/8"	20 3/8"	20 3/8"	20 3/8"	21 5/8"	21 5/8"	21	1
20" x 30"	20 3/8"	30 3/8"	20 3/8"	30 3/8"	21 5/8"	31 5/8"	28	1
22" x 22"	22 3/8"	22 3/8"	22 3/8"	22 3/8"	23 5/8"	23 5/8"	26	1
22" x 30"	22 3/8"	30 3/8"	22 3/8"	30 3/8"	23 5/8"	31 5/8"	29	2
22" x 36"	22 3/8"	36 3/8"	22 3/8"	36 3/8"	23 5/8"	37 5/8"	36	2
24" x 24"	24 3/8"	24 3/8"	24 3/8"	24 3/8"	25 5/8"	25 5/8"	27	1
24" x 36"	24 3/8"	36 3/8"	24 3/8"	36 3/8"	25 5/8"	37 5/8"	37	2
24" x 48"	24 3/8"	48 3/8"	Maximum 1 hour Combustible Ceiling Size is 24"x 36"		Maximum 2 or 3 hour Non-Combustible Ceiling Size is 24"x 36"		54	2
30" x 30"	30 3/8"	30 3/8"					38	2
32" x 32"	32 3/8"	32 3/8"					43	2
36" x 36"	36 3/8"	36 3/8"					52	2
36" x 48"	36 3/8"	48 3/8"					61	2
Custom Sizes Available Upon Request								

Custom Sizes Available Upon Request

Examples of Optional Colors at Additional Cost - Painted Samples Available

B-Bronze	R-Red	BK-Black/FB Flat	S-Sand	AB-AMS Beige	SB-Flat Beige	G-Gray	SI-Silver
----------	-------	------------------	--------	--------------	---------------	--------	-----------

FIRE RATED: OVERSIZE 2 AND 3 HOUR SINGLE DOOR



JL Industries brings you Maxam® Series 2 & 3 hour fire-rated, insulated access panels are for wall and ceiling applications where control of temperature rise and heat transmission is required. Largest industry sizes available which are ideal for equipment access applications.

FD2W™: Oversize 2 Hour Walls

FD2C™: Oversize 2 Hour Ceilings

Frame: 16 Gauge galvaneal steel up to 30" x 48" and 14 gauge for larger sizes
 Flange: Exposed flange width is 7/8" up to 36" x 36" or 1-1/4" for larger sizes
 Door: Exposed flange width is 7/8" up to 36" x 36" or 1-1/4" for larger sizes
 Finish: Off white prime coat
 Latch: 1/4" Allen key
 Sizes:
 Maximum Wall Size: 48" x 60" Maximum Ceiling Size: 36" x 36" or 30" x 48"

FD3W™: Oversized 3 Hour Walls


FD3C™: Oversized 3 Hour Ceilings

Frame: 16 Gauge galvaneal steel up to 30" x 48" and 14 gauge for larger sizes
 Flange: Exposed flange width is 7/8" up to 36" x 36" or 1-1/4" for larger sizes
 Door: 18 Gauge galvaneal steel with 22 gauge liner
 Finish: Off white prime coat
 Latch: 1/4" Allen key
 Sizes:
 Maximum Wall Size: 48" x 60" Maximum Ceiling Size: 36" x 36" or 30" x 48"

Options: Wallboard flange, recessed 5/8" flange for dryall, recessed 5/8" with mesh flange for plaster, 304 stainless steel #4 finish



MODEL FD2W

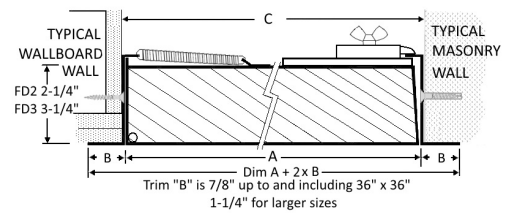

Fire-Rating of FD2W and FD2C:

Intertek Warnock Hersey listed and labeled 2 Hour Fire-Rating for vertical and horizontal installation.
 Temp Rise Max: 30 Min: 250° F (139° C) , 60 Min: 450° F (250° C)
 Testing Standards:
 Vertical: NFPA 252, UL 10B, CAN/ULC S10 4
 Horizontal: UBC 43-7

Fire-Rating of FD3W and FD3C:

Intertek Warnock Hersey listed and labeled 3 Hour Fire-Rating for vertical and horizontal installation.
 Temp Rise Max: 139° C / 250° F at 30 Min, 250° C / 450° F at 60 Min
 Testing Standards:
 Vertical: NFPA 252, UL 10B, CAN/ULC S10 4
 Horizontal: UBC 43-7

Latch and Lock Options



C - Order Size = Rough Opening Size W x H	3 Hr Wall FD3W	C - Order Size = Rough Opening Size W x H	2 Hr Wall FD2W	2 Hr Ceiling FD2C	3 Hr Wall FD3W	3 Hr Ceiling FD3C
12 x 12	Y	22 x 22	See JL FD or FDS models for 8" x 8" up to 48" x 48"	See JL FD or FDS models for 8" x 8" up to 24" x 36"	Y	See JL FD or FDS models for 8" x 8" up to 24" x 36"
12 x 16	Y	22 x 30			Y	
12 x 18	Y	22 x 36			Y	
12 x 24	Y	24 x 24			Y	
12 x 30	Y	24 x 30			Y	
12 x 36	Y	24 x 36			Y	
12 x 48	Y	24 x 48		Y	Y	Y
14 x 14	Y	30 x 30		Y	Y	Y
16 x 16	Y	30 x 36		Y	Y	Y
16 x 24	Y	30 x 48		Y	Y	Y
18 x 18	Y	32 x 32		Y	Y	Y
18 x 24	Y	36 x 36		Y	Y	Y
18 x 30	Y	36 x 48		Maximum Ceiling Size 36" x 36"	Y	Maximum Ceiling Size 36" x 36"
18 x 36	Y	40 x 40			Y	
18 x 48	Y	40 x 48			Y	
20 x 20	Y	48 x 48			Y	
20 x 24	Y	36 x 60	Y		Y	
20 x 30	Y	40 x 60	Y		Y	
20 x 36	Y	48 x 60	Y		Y	
20 x 40	Y					

Custom Sizes Available Upon Request



FIRE RATED: INSWING DOOR/RECESSED TRIM SINGLE DOOR

When space near access panels is restricted, use our access panels with doors that swing in or upwards to 90 degrees, use our Maxam series access panels with doors that swing.

FD2CI™: 2 hour Ceilings with Upward-Swinging Door



MODEL FD2CI

Frame: 16 Galvanneal steel
Flange: Exposed exterior flange width is 7/8", over all width 1-1/2"
Door: Door swings up into the opening, or rests on trim when closed. 18 gauge door panel with 22 gauge liner, 1-1/2" high temperature insulation and inside pull handle.
Finish: Off white prime coat
Insulation: 1-1/2" High temperature insulation
Latch: 1/4" Allen key
Sizes:
Minimum Size: 12" x 12"
Maximum Size: 48" x 60"
Options: Mortise lock. No optional colors.



MODEL FD2WI

FD2WI™: 2 Hour Walls with Inward-Swinging Door

Frame: 16 Galvanneal steel up to 30" x 48" and 14 gauge for larger sizes
Flange: Exposed exterior flange width is 7/8", over all width 1-1/2"
Door: 18 gauge galvanneal steel
Finish: Off white prime coat
Insulation: 1-1/2" High temperature ceramic insulation
Latch: 1/4" Allen key
Sizes:
Minimum Size: 16" x 16"
Maximum Size: 48" x 60"
Options: Mortise lock. No optional colors.



Fire Rating FD2CI

Intertek Warnock Hersey listed and labeled:
2 Hour Combustible Construction Fire Rating
4 Hour Non-Combustible Construction Fire Rating
Horizontal Installation only
Testing Standards:
Horizontal: ASTM E-119, CAN/ULC-S101.

Fire Rating FD2WI

Intertek Warnock Hersey Listed and Labeled:
2 Hour Fire-Rating vertical installation only
Testing Standards:
Vertical: NFPA 252, UL 10B, CAN/ULC S10.4

Latch and Lock Options



CEILING, UPWARD SWING,
2 HOUR FIRE-RATED



Our Maxam series 2-3 hour selection of the largest size access panels available today. These double door panels have a removeable center mullion allowing easier access to building components.

FD2D™ & FD3D™: 2-3 Hour Wall or Ceiling with Double Leaf

Frame: 14 Gauge galvalneal steel up to 30" x 48" and 14 gauge for larger sizes

Flange: Exposed flange width is 7/8" up to 36" x 36" or 1-1/4" for larger sizes

Door: 18 Gauge galvalneal steel with 22 gauge liner

Finish: Off white prime coat

Latch: 1/4" Allen key

Sizes:


Minimum Size: 24" x 60"

Maximum Wall Size: 48" x 60"; **Maximum Ceiling Size:** 60" x 48"

Options: Wallboard flange, recessed 5/8" flange for drywall, recessed 5/8" with mesh flange for plaster, 304 Stainless steel with #4 finish, Knurled knob, non-locking two position handle, 1-1/8" mortise prep complete with mortise cylinder, central handle operator for two latches, smoke gasket, masonry anchors, continuous piano hinge for sizes under 48"



MODEL FD2D

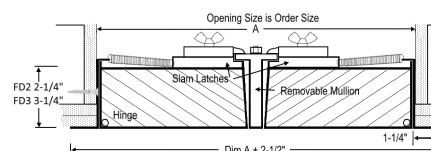

Fire rating of FD2D:

Intertek Warnock Hersey listed and labeled 2 Hour Fire-Rating for vertical and horizontal installation
Temp Rise Max: 30 Min: 250° F (139° C) , 60 Min: 450° F (250° C)

Testing Standards:

Vertical: NFPA 252, UL 10B, CAN/ULC S10 4

Horizontal: UBC 43-7

Latch and Lock Options

Standard 1/4" Allen Key



Optional Knurled Knob



Optional Mortise Lock



C - Order Size = Rough Opening Size W x H (hinge side)			FD2D Approx. Weight Lbs.	FD3D Approx Weight Lbs	Number of Latches
W x H	FD2D	FD3D			
Walls or Ceilings					
36 x 48	Y	Y	85	91	2
40 x 40	Y	Y	84	85	2
40 x 48	Y	Y	94	99	4
48 x 36	Y	Y	79	91	2
48 x 40	Y	Y	107	99	4
48 x 48	Y	Y	78	115	4
60 x 24	Y	Y	90	83	2
60 x 30	Y	Y	105	88	2
60 x 36	Y	Y	93	114	4
60 x 40	Y	Y	114	124	4
60 x 48	Y	Y	135	144	4
Additional sizes walls only below					
24 x 60	Y	Y	74	83	4
36 x 60	Y	Y	111	114	4
40 x 60	Y	Y	120	124	4
48 x 60	Y	-	-	-	4
Custom Sizes Available Upon Request					

A specialty Maxam series 2 hour fire rated door for laundry or garbage chute access. The wider 1 3/4" flange covers opening edges and the handle provides easy access to the chute. Optional smoke gasket for garbage chute installations.

FD2L™: Fire-Rated Access Panels - 2 Hour Laundry or Garbage Door for Walls

Frame: 16 Gauge galvalneal steel

Flange: Exterior flange with 1-3/4" with a 3/8" return

Door: 22 Gauge galvalneal steel with 22 gauge liner

Finish: Off white prime coat

Latch: Non-locking "T"-Handle 1/4" with interior release

Sizes:

Minimum Size: 16" x 16"

Maximum Wall Size: 30" x 30"

Options: 304 Stainless steel with #4 finish, 1-1/8" mortise prep complete with mortise cylinder, masonry anchors, smoke gasket for garbage chute



MODEL FD2L

Fire Rating for FD2L

Intertek Warnock Hersey listed and labeled 2 Hour Fire-Rating for vertical installation only

Temp Rise Max: 30 Min: 250° F (139° C) , 60 Min: 450° F (250° C)


Testing Standard:

Vertical: NFPA 252, UL 10B, CAN/ULC S104





MODEL TM

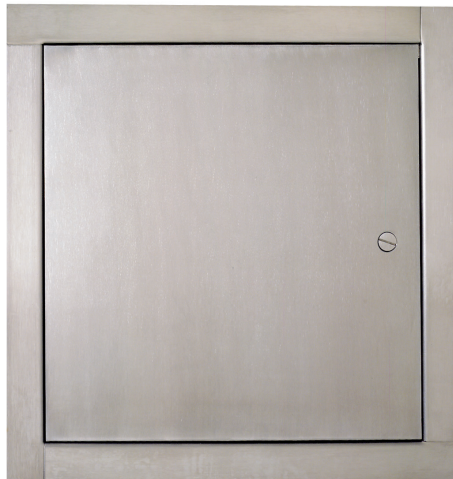

MODEL TMS STAINLESS STEEL

MULTI-PURPOSE FLUSH STEEL ACCESS PANEL: TM™ Series

TM™: Standard Panel (Wall or Ceiling)

Frame: 16 Gauge steel with a 1" wall flange

Door: 16 Gauge steel access door mounted with 90° continuous, concealed hinge

Finish: White powder coat paint

Lock: Flush screwdriver-operated steel cam (C)

Sizes:

Minimum Size: 6" x 6"

Maximum Wall Size: 48" x 48"; Maximum Ceiling Size: 36" x 36"

See the CAP Series if larger sizes are needed

TMS™: Standard Stainless Steel Panel (Wall or Ceiling)

Frame: 18 Gauge stainless steel with 1" wall flange.

Door: 16 Gauge stainless steel access door mounted with 90° continuous, concealed hinge

Finish: 304 stainless with #4 satin finish


Lock: Flush screwdriver-operated cam (C)

Sizes:

Minimum Size: 6" x 6"

Maximum Size: 48" x 48"

Options: Double door, louvered vents, plexiglass view window, removeable door (no hinge), rainhood, gasketing, galvanneal steel (TMG), cylinder lock, mortise cam latch, mortise deadbolt lock, mortise slam latch, knob cam, torx, spanner or hex head cam, TM-14 gauge.

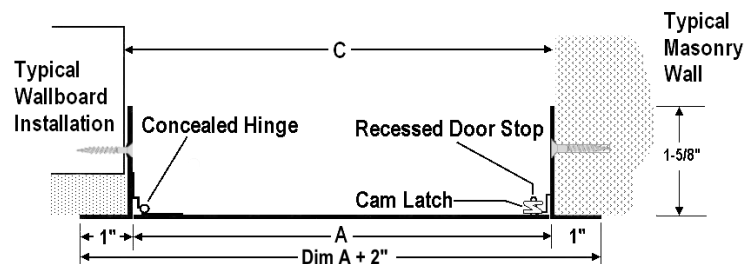

Latch and Lock Options for TM, TMS, TMG


Mortise Lock (M2)(U4)(B2)	Cylinder Lock (L)	Torx Head Cam (C2)	Spanner Head Cam (C3)	Hex Head Cam (C4)	Knob Cam (C5)

A-Order Size= Door Size WxH	C-Wall Opening Dimensions Fits ± 1/8" Opening Size		Approx. Shipping Weight	Number of Latches	A-Order Size= Door Size WxH	C-Wall Opening Dimensions Fits ± 1/8" Opening Size		Approx. Shipping Weight	Number of Latches
	Width	Height				Width	Height		
6" x 6"	6 1/2"	6 1/2"	4 lbs.	1	18" x 18"	18 1/2"	18 1/2"	12 lbs.	3
8" x 8"	8 1/2"	8 1/2"	4 lbs.	1	20" x 24"	20 1/2"	24 1/2"	15 lbs.	4
8" x 12"	8 1/2"	12 1/2"	6 lbs.	1	20" x 30"	20 1/2"	30 1/2"	20 lbs.	4
10" x 10"	10 1/2"	10 1/2"	6 lbs.	1	22" x 22"	22 1/2"	22 1/2"	17 lbs.	4
12" x 12"	12 1/2"	12 1/2"	7 lbs.	1	22" x 30"	22 1/2"	30 1/2"	22 lbs.	4
12" x 16"	12 1/2"	16 1/2"	9 lbs.	1	22" x 36"	22 1/2"	36 1/2"	24 lbs.	5
12" x 18"	12 1/2"	18 1/2"	10 lbs.	1	24" x 24"	24 1/2"	24 1/2"	18 lbs.	4
12" x 24"	12 1/2"	24 1/2"	12 lbs.	2	24" x 30"	24 1/2"	30 1/2"	22 lbs.	5
14" x 14"	14 1/2"	14 1/2"	9 lbs.	1	24" x 36"	24 1/2"	36 1/2"	25 lbs.	5
16" x 16"	16 1/2"	16 1/2"	11 lbs.	1	30" x 30"	30 1/2"	30 1/2"	30 lbs.	5
16" x 20"	16 1/2"	20 1/2"	13 lbs.	1	36" x 36"	36 1/2"	36 1/2"	41 lbs.	5

Custom Sizes and Special Modifications Available Upon Request, Sizes Not Shown May Be Ordered in 1/4" Increments

Examples of Optional Colors at Additional Cost - Painted Samples Available

B-Bronze	R-Red	BK-Black/FB Flat	S-Sand	AB-AMS Beige	SB-Flat Beige	G-Gray	SI-Silver
----------	-------	------------------	--------	--------------	---------------	--------	-----------

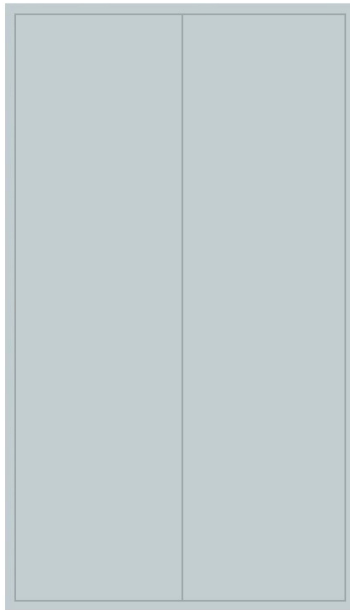

MODEL TM-2460CG-D
(12 Latches)



**View of
removable
mullion from
underside of
access panel.**

Need more access behind panels? Install a double leaf access door with a removable center mullion. Need ventilation? The TM louvered panel offers many options. Other options are available including removable doors, mortise locks, special lock preps, rainhoods, gasketing, or acrylic view windows.

DOUBLE DOOR ACCESS PANELS: TM Series

Available in steel or stainless steel in a wide range of sizes

Frame: 16 Gauge steel frame with 1-1/4" wall flange. 1-5/8" depth. Removable center mullion attached by 2 screws at top and bottom.

Door: 16 Gauge steel mounted with 90° continuous, concealed hinge

Finish: White powder coat paint

Lock & Latches: Flush screwdriver-operated steel cams in all positions, unless cylinder lock option is selected

Sizes:

Wall Size up to: 48" x 60"; **Ceiling Size up to:** 36" x 36"

Other size restrictions apply, consult customer service for sizes not shown.

Options & Special Features: See submittal to view all

Order Size = Door Size W x H	C- Wall Opening Dimensions Fits ± 1/8" Opening Size	Number of Latches
Inches		
Walls & Ceilings		
24 x 36	24 1/4 x 36 1/4	6
24 x 48	24 1/4 x 48 1/4	8
24 x 60	24 1/4 x 60 1/4	12
36 x 36	36 1/4 x 36 1/4	10
Wall Sizes Only Below		
36 x 48	36 1/4 x 48 1/4	12
36 x 54	36 1/4 x 54 1/4	14
48 x 24	48 1/4 x 24 1/4	8
48 x 30	48 1/4 x 30 1/4	10
48 x 36	48 1/4 x 36 1/4	10
48 x 48	48 1/4 x 48 1/4	12
48 x 60	48 1/4 x 60 1/4	16
Other sizes available in 1/4" increments		

LOUVERED ACCESS PANEL: TM Series

Available in steel

Frame: 16 Gauge steel frame with 1" wall flange

Door: 16 Gauge steel with louvers cut into the door panel

Finish: White powder coat paint

Lock & Latches: Flush screwdriver-operated steel cams in all positions, unless cylinder lock option is selected

Sizes:

Wall Size up to: 48" x 60"; **Ceiling Size up to:** 36" x 36"

Other size restrictions apply, consult customer service for sizes not shown.

Options: See submittal to view all options.



MODEL TM-2424CW-L
Louvered Panel

OTHER OPTIONS FOR TM SERIES ACCESS PANELS:



Rainhood




Gasketing



Mortise Lock



View Window



Removable Door



CONCEALED FRAME: WALLBOARD & PLASTER

CONCEALED FRAME FLUSH ACCESS PANELS FOR DRYWALL OR PLASTER: TMW™, TMP™, and TME™

TMW: Wallboard Bead (Wall or Ceiling)

Frame: 16 Gauge with 1" drywall bead that can be taped and mudded

Door: 16 Gauge steel with concealed continuous hinge

Finish: White powder coat paint

Lock: Flush screwdriver-operated cam (C)

Sizes:

Minimum Size: 6" x 6"

Maximum Wall Size: 36" x 48" Maximum Ceiling Size: 36" x 36"

TMP: Recessed Plaster Flange (Wall or Ceiling)

Frame: 16 Gauge steel with 1 3/8" wide plaster flange, recessed 3/4"

Door: 16 Gauge steel with concealed continuous hinge

Finish: White powder coat paint

Lock: Flush screwdriver-operated cam (C)

Sizes:

Minimum Size: 6" x 6"

Maximum Wall Size: 36" x 48" Maximum Ceiling Size: 36" x 36"

TME: Recessed Plaster Flange Extended (Wall or Ceiling)

Frame: 16 Gauge steel with 2 3/4" wide plaster flange/steel lath recessed 3/4", for plaster application

Door: 16 Gauge steel with concealed continuous hinge

Finish: White powder coat paint


Lock: Flush screwdriver-operated cam (C)

Sizes:

Minimum Size: 6" x 6"

Maximum Wall Size: 36" x 48" Maximum Ceiling Size: 36" x 36"

Options: Stainless or galvalneal, cylinder lock, knob cam, torx, spanner or hex head cam, plexiglass view window, removable door (no hinge). Drywall, & Plaster Options: Also include mortise cam latch, mortise deadbolt lock and mortise slam latch.

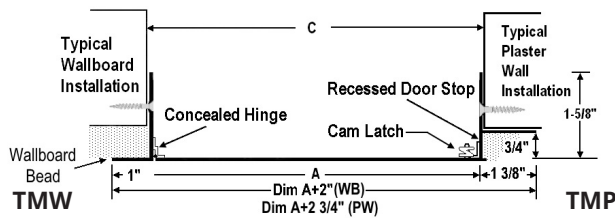

Latch and Lock Options


Mortise Lock (M2)(U4)(B2)	Cylinder Lock (L)	Torx Head Cam (C2)	Spanner Head Cam (C3)	Hex Head Cam (C4)	Knob Cam (C5)

Door Sizes and Wall Openings			
A-Order Size = Door Size W x H	C-C- Wall Opening Dimensions Fits ± 1/8" Opening Size	Approx. Shipping Weight	Number of Latches
		TMW,TMP,TME	
8" x 8"	8 1/2" x 8 1/2"	4 lbs.	1
10" x 10"	10 1/2" x 10 1/2"	5 lbs.	1
12" x 12"	12 1/2" x 12 1/2"	7 lbs.	1
14" x 14"	14 1/2" x 14 1/2"	8 lbs.	1
16" x 16"	16 1/2" x 16 1/2"	10 lbs.	1
16" x 20"	16 1/2" x 20 1/2"	12 lbs.	1
18" x 18"	18 1/2" x 18 1/2"	12 lbs.	3
22" x 22"	22 1/2" x 22 1/2"	16 lbs.	4
22" x 30"	22 1/2" x 30 1/2"	21 lbs.	4
24" x 24"	24 1/2" x 24 1/2"	19 lbs.	4

Custom Sizes and Special Modifications Available Upon Request

Examples of Optional Colors at Additional Cost - Painted Samples Available


B- Bronze	R- Red	BK- Black/FB Flat	S- Sand	AB-AMS Beige	SB- Flat Beige	G- Gray	SI- Silver
-----------	--------	-------------------	---------	--------------	----------------	---------	------------

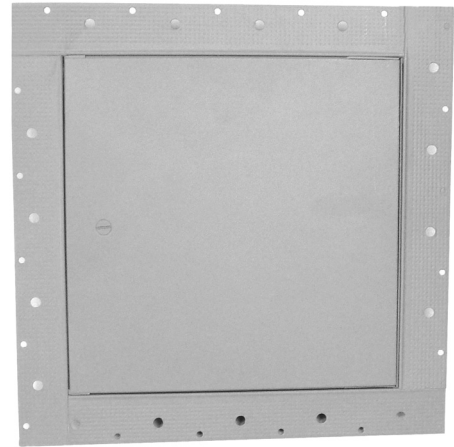

MODEL
TMW



MODEL
TMP

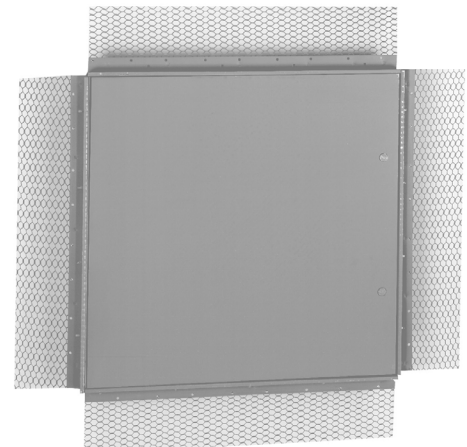

MODEL TME

CONCEALED FRAME FLUSH ACCESS PANELS FOR PLASTER OR TILE/WALLBOARD INSERT:

CTE™, CT™ and CTW™ Series



MODEL
CT

CT: Recessed Door with Trimless Frame: (Wall or Ceiling)

Not for use with suspended ceiling -requires installation into joists. Door face is recessed 1" to accept application of acoustic tile or wallboard to match surrounding surface.

Frame: 14 Gauge steel

Door: 16 Gauge steel, recessed to accept 1/2" insert, with continuous hinge


Finish: White powder coat paint

Lock: Flush screwdriver-operated cam (C)

Sizes:

Minimum Size: 6" x 6"

Maximum Wall Size: 36" x 36"; Maximum Ceiling Size: 24" x 48"

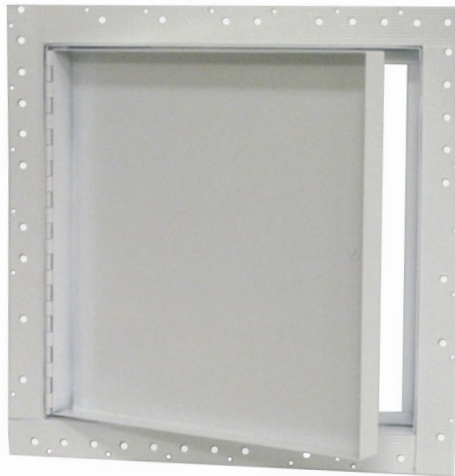

MODEL
CTW

CTW: Recessed Door with Drywall Bead: (Wall or Ceiling)

Door face is recessed 1" to accept wallboard insert to match surrounding surface. This access door provides the most seamless look of all JL models.

Frame: 14 Gauge steel with 1" wide wallboard bead flange

Door: 16 Gauge steel, recessed to accept 1/2" drywall insert, with continuous hinge

Finish: White powder coat paint

Lock: Flush screwdriver-operated cam (C)

Sizes:

Minimum Size: 8" x 8"

Maximum Wall Size: 36" x 36"; Maximum Ceiling Size: 24" x 48"

CTE: Recessed Flange and Door for Plaster Surfaces (Wall or Ceiling)

Door face has metal lath in 5/8" Recess, and the frame features 2 3/4" expanded metal lath wings to accept application of plaster to match surrounding plaster walls.

Frame: 14 Gauge steel with 2 3/4" wide steel lath frame recessed 3/4"

Door: 16 Gauge steel door with 5/8" recess, metal lath and continuous hinge

Finish: White powder coat paint



Lock: Flush screwdriver-operated cam (C)

Sizes:

Minimum Size: 8" x 8"

Maximum Wall Size: 36" x 36"; Maximum Ceiling Size: 24" x 48"

Options: Cylinder lock, torx, spanner or hex head cam. Mortise prep or mortise lock installed, galvanized steel, different gauges.

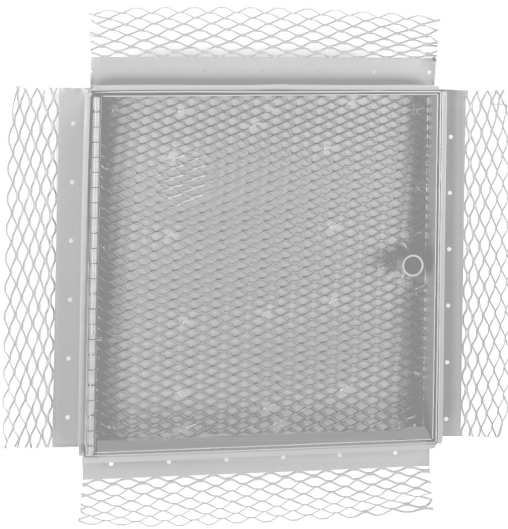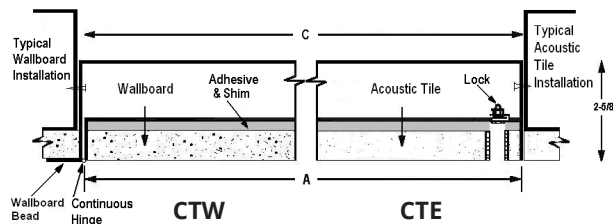

MODEL
CTE

Door Sizes and Wall Openings

A-Order Size = Door Size WxH	C-Wall Opening Dimension	Approximate Shipping Weight			Number of Latches
	CT, CTW & CTE	CT	CTW	CTE	
12" x 12"	12 1/4" x 12 1/4"	7 lbs.	7 lbs.	9 lbs.	1
12" x 24"	12 1/4" x 24 1/4"	11 lbs.	11 lbs.	14 lbs.	2
18" x 18"	18 1/4" x 18 1/4"	12 lbs.	12 lbs.	14 lbs.	3
22" x 30"	22 1/4" x 30 1/4"	21 lbs.	21 lbs.	21 lbs.	4
24" x 24"	24 1/4" x 24 1/4"	19 lbs.	19 lbs.	20 lbs.	4
24" x 36"	24 1/4" x 36 1/4"	27 lbs.	27 lbs.	31 lbs.	5

Custom Sizes and Special Modifications Available Upon Request

Examples of Optional Colors at Additional Cost - Painted Samples Available

B-Bronze	R-Red	BK-Black/FB Flat	S-Sand	AB-AMS Beige	SB-Flat Beige	G-Gray	SI-Silver
----------	-------	------------------	--------	--------------	---------------	--------	-----------

EXTERIOR: STEEL AND STAINLESS

WEATHER-RESISTANT R13 ACCESS PANEL: XT™ Series

Select this exterior access panel design with energy efficiency in mind. 2 inches of polyisocyanurate provides an R-value of 13, and EPDM gasketing provides the weather-resistance you need in sizes up to 48" x 48".

XTA: Galvanized & Aluminum Flush Access Panel

Frame: 16 Gauge galvanized steel frame

Door: 2" Thick polyisocyanurate Insulation, 0.040 aluminum door panel

Finish: White powder coat paint

Latch: (F4) Lockable compression paddle latch, black is the standard latch

XTS Stainless Flush Access Panel

Frame: 16 Gauge galvanized steel frame

Door: 2" Thick polyisocyanurate insulation, 20 gauge stainless steel door panel

Finish: 304 Stainless with #4 Finish


Latch: (F4) Lockable compression paddle latch, black is the standard latch

Options:

(F6) Chrome lockable compression paddle latch. Optional Colors for XTA



**XTS WITH OPTIONAL
LOCKING CHROME
LATCH**

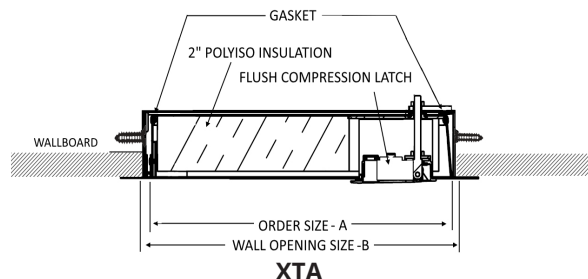

XTA

WEATHER-RESISTANT R5.7 ACCESS PANEL: XP™ Series

This cost-effective solution for providing access to building components features an insulated and gasketed door with interior and exterior handles. Available in a galvanized/aluminum or stainless construction for flush or plaster installation up to 48" x 48".

XPA / XPEA: Access Panel

XPA or XPEA: Galvanized & aluminum flush access panel

XPA Frame: 16 Gauge galvanized steel frame with 1" flange

XPEA Frame: 16 Gauge galvanized steel frame with plaster flange recessed 3/4"; 2-3/4" wide

Door: 2" Thick insulated 0.040 aluminum door

Finish: White powder coat paint

XPS: Stainless Steel Flush Access Panel

XPS: Frame: 16 Gauge stainless steel frame with 1" flange

XPES Frame: 16 Gauge stainless steel frame with plaster flange recessed 3/4"; 2-3/4" wide

Door: 2" Thick insulated 20 gauge stainless steel door

Finish: #304 Stainless steel with #4 finish


All Models Include: Continuous stainless hinges, EPDM foam rubber bulb seal and non-locking compression chrome plated handles (H2)

Options: Chrome-plated locking handle (H3), removable locking handle (H4), paint colors, rainhood



MODEL XPA

**MODEL XPEA WITH
NON- LOCKING
HANDLE**

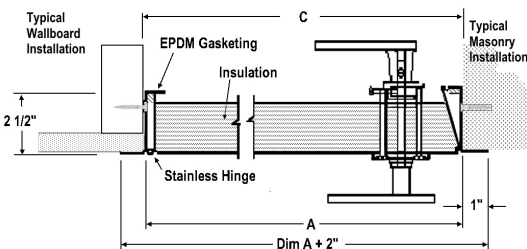

XP/XPS

Door Sizes and Wall Openings: Models XTA, XTS, XPA, XPS, XPEA, AND XPES

A - Order Size = Door Size W x H	C-Wall Opening W x H	Number of Handles	Approximate Shipping Weight	A - Order Size = Door Size W x H	C-Wall Opening W x H	Number of Handles	Approximate Shipping Weight
12" x 12"	12 3/8" x 12 3/8"	1	11 lbs.	24" x 30"	24 3/8" x 30 3/8"	2	40 lbs.
14" x 14"	14 3/8" x 14 3/8"	1	15 lbs.	24" x 36"	24 3/8" x 36 3/8"	2	42 lbs.
18" x 18"	18 3/8" x 18 3/8"	1	19 lbs.	24" x 48"	24 3/8" x 48 3/8"	2	57 lbs.
20" x 24"	20 3/8" x 24 3/8"	XP:1, XT 2	30 lbs.	30" x 30"	30 3/8" x 30 3/8"	2	44 lbs.
20" x 30"	20 3/8" x 30 3/8"	2	32 lbs.	30" x 36"	30 3/8" x 36 3/8"	2	56 lbs.
22" x 30"	22 3/8" x 30 3/8"	2	34 lbs.	36" x 36"	36 3/8" x 36 3/8"	2	61 lbs.
22" x 36"	22 3/8" x 36 3/8"	2	40 lbs.	36" x 48"	36 3/8" x 48 3/8"	2	75 lbs.
24" x 24"	24 3/8" x 24 3/8"	XP:1, XT 2	27 lbs.	48" x 48"	48 3/8" x 48 3/8"	2	108 lbs.

Custom Sizes Available Upon Request

Examples of Optional Colors at Additional Cost - Painted Samples Available

B - Bronze	R - Red	BK - Black/FB Flat	S - Sand	AB - AMS Beige	SB - Flat Beige	G - Gray	SI - Silver
------------	---------	--------------------	----------	----------------	-----------------	----------	-------------



GASKETED ACCESS PANEL: AT™ Series

This Gasketed Panel is ideal for laboratories, pressurized rooms, climate-controlled rooms, dusty or high-moisture environments. The frame and door are specially designed to form a tight seal reducing air infiltration.

Frame: 16 Gauge steel

Door: 16 Gauge steel

Gasket: Fully gasketed on all sides with EPDM rubber

Finish: White powder coat paint


Latch: (C5) Standard handle

Sizes:

Minimum Size: 12" x 12"

Maximum Size: 36" x 36"


Options: Flush handle (F1), locking flush handle (F2), other locks/latches, #4 finish stainless steel or galvalneal steel, other gauges

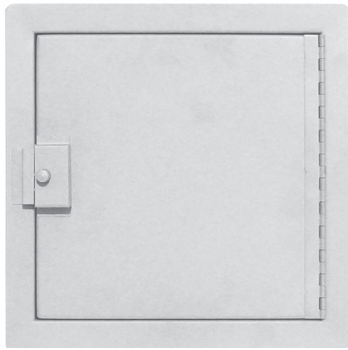

**MODEL AT-WITH
STANDARD C5
HANDLE**



**MODEL AT-WITH
OPTIONAL F1 HANDLE**

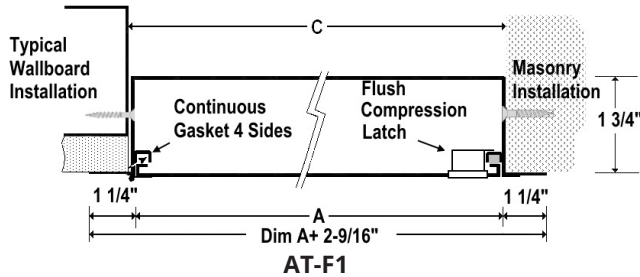

A - Order Size = Door Size W x H	C-Wall Opening Dimensions		Approx. Shipping Weight	Latch
	Width	Height		
12" x 12"	12 3/8"	12 3/8"	7 lbs.	1
18" x 18"	18 3/8"	18 3/8"	16 lbs.	1
24" x 24"	24 3/8"	24 3/8"	28 lbs.	2
24" x 36"	24 3/8"	36 3/8"	42 lbs.	2

Custom Sizes Available Upon Request

SURFACE-MOUNT ACCESS PANEL: SM™ Series

The SM is an economical surface-mounting panel that quickly and easily installs with screws through the corners of the frame. It is suitable for installation in wallboard or plaster.

Frame: 1" Wide, 16 gauge trim

Door: 16 Gauge steel

Finish: White powder coat paint


Lock: Screwdriver operated cam lock (C)

Sizes:

Minimum Size: 8" x 8"

Maximum Size: 36" x 36"

Options: #4 Satin finish stainless steel, optional colors, cylinder Lock, knob cam, torx, spanner or hex head cam

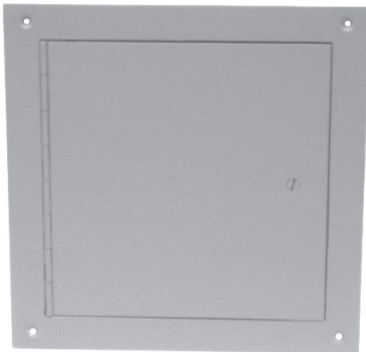

MODEL SM PANEL

Latch and Lock Options for SM

Cylinder Lock (L)	Torx Head Cam (C2)	Spanner Head Cam (C3)	Hex Head Cam (C4)	Knob Cam (C5)

A - Order Size = Door Size W x H	C-Wall Opening Dimensions		Approx. Shipping Weight	Number of Latches
	Width	Height		
8" x 8"	8"	8"	3 lbs.	1
12" x 12"	12"	12"	7 lbs.	1
16" x 16"	16"	16"	12 lbs.	1
24" x 24"	24"	24"	27 lbs.	4

Custom Sizes Available Upon Request


Examples of Optional Colors at Additional Cost - Painted Samples Available

B-Bronze	R-Red	BK-Black/FB Flat	S-Sand	AB-AMS Beige	SB-Flat Beige	G-Gray	SI-Silver
----------	-------	------------------	--------	--------------	---------------	--------	-----------



MODEL SP


Shown with Detention Deadbolt Lock Installed

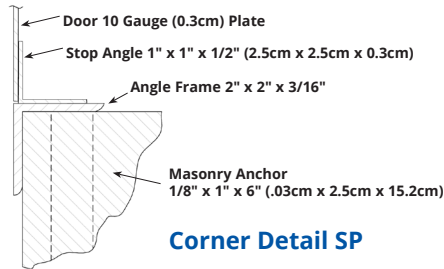

Corner Detail SP

FLAT FRAME STEEL SECURITY PANEL: SP™ Series


Frame: 2" x 2" x 3/16" angle frame with 2" flange, welded at corners. Continuous 1" stop.
Door: 10 gauge plate steel door mounted on two heavy-duty detention hinges welded to the frame
Finish: White powder coat paint
Lock: Select lock prep or lock installed. See page 15 for options.
Anchors: Heavy duty steel masonry anchors welded to frame at factory
Sizes: Minimum 8"x 8". Maximum wall 48"x 48", maximum ceiling 24"x 24"
Options: #4 Finish stainless steel or galvalneal

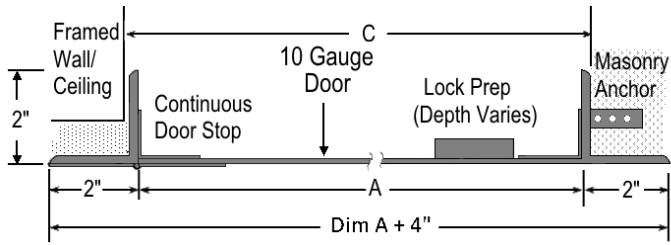

Model SP

FLAT FRAME STEEL HIGH SECURITY PANEL: HSP™ Series

Frame: 2" x 3" x 3/16" angle frame with 2" flange, welded at corners. Continuous 1" stop.
Door: 7 gauge box-formed steel door mounted on two heavy-duty 4" butt hinges welded to the frame
Finish: White powder coat paint
Lock: Select lock prep or lock installed. See page 15 for options.
Anchors: Heavy duty steel masonry anchors welded to frame at factory
Sizes: Minimum 8"x 8". Maximum wall 48"x 48", maximum ceiling 24"x 24".

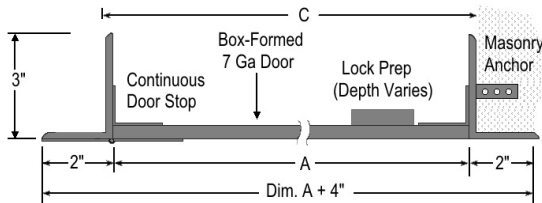

Model HSP

A - Order Size = Door Size W x H	C-Opening Dimensions		SP Approximate Ship Weight (lbs)	HSP Approximate Ship Weight (lbs)	Number of Locks
	Inches	Width	Height		
	8" x 8"	8 3/4"	8 3/4"	16	20
	10" x 10"	10 3/4"	10 3/4"	20	25
	12" x 12"	12 3/4"	12 3/4"	24	30
	14" x 14"	14 3/4"	14 3/4"	29	36
	16" x 16"	16 3/4"	16 3/4"	32	40
	18" x 18"	18 3/4"	18 3/4"	38	47
	24" x 24"	24 3/4"	24 3/4"	52	65
1 lock, 2 security screws					
Sizes Below Walls Only					
	24" x 36"	24 3/4"	36 3/4"	72	90
	24" x 48"	24 3/4"	48 3/4"	90	112
1 lock, 3 security screws					

Add 1 lb. for Mortise Deadbolt Prep, or 4 lbs. for Detention Lock installed. For Model SP Panels of 32" or Larger, We Recommend Security Screws be Installed with Lock for Additional Security. Custom Sizes and Modifications Available Upon Request


Examples of Optional Colors at Additional Cost - Painted Samples Available






MORTISE CAM LATCH

Prep



MCP: Prepped for mortise cylinder lock by others. Cylinder lock must be 1-1/8" diameter x 1-1/4" long mortise cylinder with standard cam. Cylinders by others require threaded lock nut ring.

Installed



MCP-02: Includes installed mortise cylinder Kaba Ilco 7205SC1, 1-1/8" Dia x 1-1/4" long mortise cylinder with standard cam (PN: 06431), 2 keys (PN: 06431-KEY) and lock nut ring (PN: 0646).

MORTISE DEAD BOLT

Prep



MDP: Prepped for mortise deadbolt cylinder lock by others. Cylinder lock must be 1-1/8" Dia x 1-1/4" long mortise cylinder with Adams Rite cam. Longer lengths require adjustable lock collar (PN: SL-ALC).

Installed




MDP-03: Includes installed Kaba Ilco 7205SC2, 1-1/8" x 1-1/4" long mortise cylinder with Adams Rite cam (PN: 06441) and includes 2 keys (PN: 06431-KEY).

MDP-07: Includes installed temporary construction core mortise deadbolt cylinder Best 1E74C181RP3626, 1-1/8" Dia x 1-1/4" long mortise cylinder with C181 Adam Rite cam (PN: SL-1E74). Operation key (PN: 040004) & control key (PN: 040005) to remove the construction core ordered separately.


DETENTION SLAM LOCK

Prep



DSPP-25: Prepped for detention slam lock Airteq 5017 by others.

Installed



DSPI-25: Includes Includes: Airteq 5017 medium security for slam-locking with stainless steel latchbolt 1" x 7/16" bolt throw (PN: DDI-5017). Keys sold separately (DDK-5017)

DETENTION DEAD BOLT

Prep



DDPP-17: Prepped for detention deadbolt lock Airteq 5010.

This mounting also accommodates Southern Folger 1010A

Installed



DDPI-17: Includes installed Airteq 5010, medium security deadbolt, with zinc plated steel bolt 1-1/2" x 3/4" and 5/8" bolt throw (PN: DDI-5010). Keys sold separately (PN: DDK-5010)

DETENTION DEAD BOLT MOGUL LOCK

Prep



MLPP-19: Prepped for detention deadbolt with mogul cylinder Airteq 5010M.

Installed



MLPI-19: Includes installed Airteq 5010M medium security deadbolt with mogul key cylinder, zinc plated steel bolt 1-1/2" x 1/2" and 5/8" throw (PN: DDI-5010M). Includes 2 keys (PN: DDK-5010M)



SOUND RATED

STC-65 Rated Access Panel for walls and ceilings. The STC™ Panel will help you to meet noise containment and sound transmission blocking requirements for walls in new construction or building updates.

- STC 65 and OITC 51 sound-rated
- Used in music rooms, performing spaces, healthcare facilities

SOUND RATED: STC Series

Frame: 16 Gauge CRS with 1" flange, and continuous gasketing
Door: 2 1/4" Thick with heavy duty, continuous hinge and sound -blocking insulation
Finish: White powder coat paint
Latch/Lock: Black lockable compression paddle latch
STC Rating: 65 when installed as directed in STC-rated wall
Sizes: Minimum 8" x 8", maximum 36" x 36"
Options: Locking chrome finish latch, #4 stainless steel, galvaneal steel, optional paint colors

Tested in accordance with

ASTM E90-09

Sound transmission loss of building partitions

Classified in accordance with

ASTM E413-10 Classification for rating sound insulation of partitions or floors


ASTM E1223-10a Standard classification for rating indoor/outdoor sound attenuation



MODEL STC-3636F4



MODEL STC-1212F4

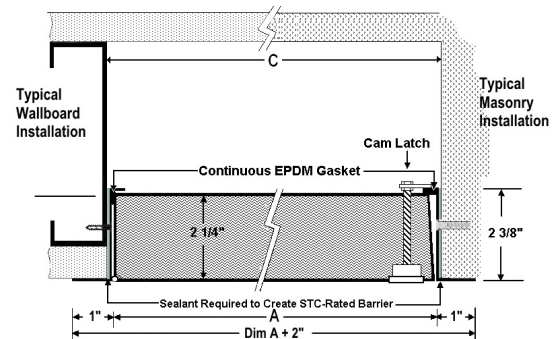

Model Size is Door Size			
A - Order Size = Door Size W x H	Wall Opening Dimension C	Approx. Weight	Number of Latches
STC-1212	12-3/8" x 12-3/8"	9	1
STC-2222	22-3/8" x 22-3/8"	21	2
STC-2424	24-3/8" x 24-3/8"	24	2
STC-2436	24-3/8" x 36-3/8"	35	2

Other Sizes in 1/4" Increments Door Size Available

Latch and Lock Options

Standard Locking Black Latch (F4)	Optional Locking Chrome Latch (F6)

Examples of Optional Colors at Additional Cost - Painted Samples Available

B-Bronze	R-Red	BK-Black/FB Flat	S-Sand	AB-AMS Beige	SB-Flat Beige	G-Gray	SI-Silver
----------	-------	------------------	--------	--------------	---------------	--------	-----------



ROOF ACCESSORIES



FIRE PROTECTION



ENTRANCE MATS,
GRATES, & GRILLES



VISION LITES



DOOR LOUVERS



SMOKE VENTS

SEE MORE ACTIVAR CONSTRUCTION PRODUCTS GROUP OFFERINGS ON OUR WEBSITE WWW.ACTIVARCPG.COM



ACTIVAR CONSTRUCTION PRODUCTS GROUP INC.

CONTACT US:

800-554-6077 sales@activarcp.com

MANUFACTURING:
Bloomington, MN | Commerce, CA

WAREHOUSES:
Dallas, TX | Chicago, IL | Lancaster, PA
Seattle, WA | Atlanta, GA | Fargo, ND
Omaha, NE | Ft Myers, FL