

# SUBMITTAL: STC-RATED ACCESS PANEL - STC™ SERIES

**JL Industries Introduces the First STC-Rated Access Panel with an STC 47 Rating. Meet Noise Containment and Sound Transmission Blocking Requirements for Walls with the STC Panel**

**Installation:** Walls only. Use sound-blocking sealant.  
**Construction:** 16 gauge CRS 1" Wide Frame, and Door is 20 gauge CRS  
**Finish:** White powder coat paint.  
**Hardware:** Heavy Duty, Continuous Hinge  
**Latch/Lock:** Black, Non-locking Compression Paddle Latch, 2 for Heights Greater than 30". (F3)  
**Gasketing:** Heavy Duty EPDM Rubber  
**Insulation:** Proprietary Sound-Blocking Assembly  
**STC Rating:** 47 When Installed as Directed in STC-rated Wall.  
**Sizes:** Minimum 12" x 12", Maximum 24" x 36"  
**Labeling:** Intertek Warnock Hersey Listing



STC-1212F3W Above in White

**Optional Features At Additional Cost**

- Locking Flush Black Paddle Latch (F4) see pg 2
  - Locking Paddle Latch Chrome-plated (F6) see pg 2
  - Stainless Steel -16 ga Frame, 20 ga Door
  - Galvanneal Steel - 16 ga Frame, 20 ga Door
  - Other Powder Coat Paint Colors. Indicate Color Code Here: \_\_\_\_\_
  - Other Sizes up to 24" x 36" - Opening Size: \_\_\_\_\_" W x \_\_\_\_\_" H
- Available in 1/4" Door Size Increments. Wall Opening is + 3/8"

Model Size is Door Size				
Qty	Model & Size (A) W X H (inches)	Wall Opening Dimension (C)	Approx. Weight	Latch (es)
	STC-1212	12 3/8 x 12 3/8	14	1
	STC-1414	14 3/8 x 14 3/8	18	1
	STC-1616	16 3/8 x 16 3/8	23	1
	STC-1818	18 3/8 x 18 3/8	29	1
	STC-2030	20 3/8 x 30 3/8	53	2
	STC-2222	22 3/8 x 22 3/8	40	1
	STC-2230	22 3/8 x 30 3/8	53	2
	STC-2236	22 3/8 x 36 3/8	55	2
	STC-2424	24 3/8 x 24 3/8	46	1
	STC-2430	24 3/8 x 30 3/8	54	2
	STC-2436	24 3/8 x 36 3/8	60	2
Other Sizes up to 24" x 36" in 1/4" Increments Door Size Available				



STC-2436F3G in Gray


**TESTED IN ACCORDANCE WITH:**  
**ASTM E90-09**  
**Sound Transmission Loss of Building Partitions**



**CLASSIFIED IN ACCORDANCE WITH:**  
**ASTM E413-10 Classification for Rating Sound Insulation of Partitions or Floors**

**ASTM E1332-10a Standard Classification for Rating Outdoor-Indoor Sound Attenuation**

 <p><b>JL INDUSTRIES</b></p> <p>STC™ IS A TRADEMARK OF ACTIVAR</p>	Distributor:	Quantity:
	Contractor:	Approved By:
	Model #:	Architect:
	Project:	Date:
<p>HEADQUARTERS: 9702 NEWTON AV S, BLOOMINGTON, MN 55431 PH: 800-554-6077 EMAIL: SALES@ACTIVARCPG.COM WWW.ACTIVARCPG.COM</p> <p>MANUFACTURING: BLOOMINGTON, MN &amp; COMMERCE, CA WARE HOUSES: SEE WEBSITE FOR LOCATIONS 2/10/2022</p>		

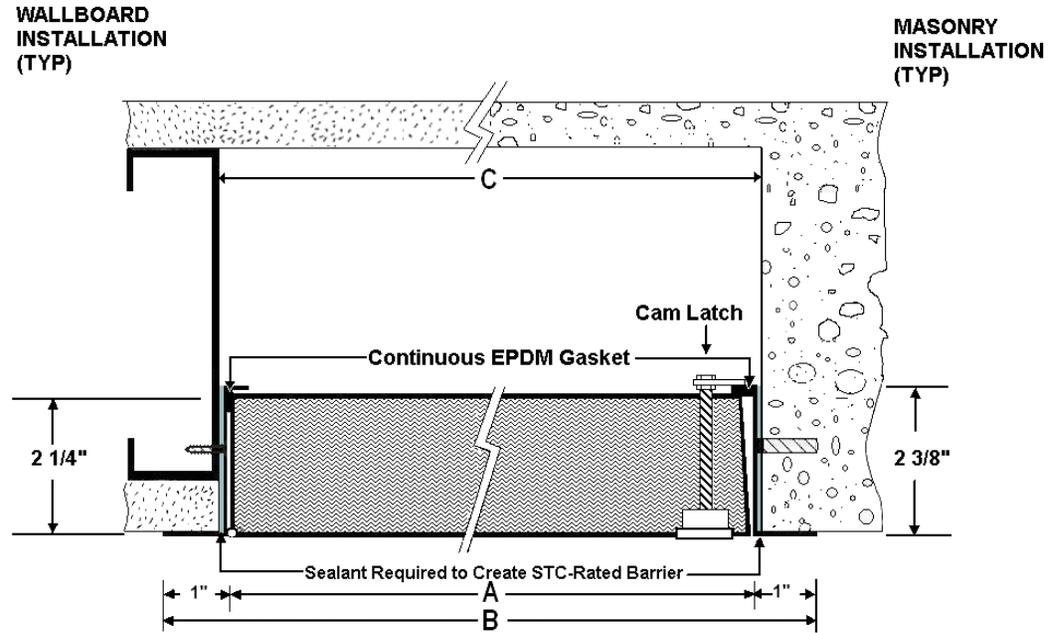

THE STC ACCESS PANEL CAN BE INSTALLED IN A WIDE RANGE OF STC-RATED WALLS  
THE DRAWING ABOVE IS AN EXAMPLE ONLY

**Proper Installation is Critical to Create the STC-Rated Sound Barrier. For best results, Activar Construction Products Group, Inc. (ACPG) recommends the use of Green Glue® Acoustic Sealant as manufactured by Saint-Gobain® Company.**



Gasketing: Heavy Duty EPDM Rubber

Order Format: STC- \_\_\_\_\_ STC-2436F3W

Width	Height	Lock Code	Color Code
F3 (non locking black latch)			
F4 (locking black latch)			
F6 (locking zinc latch)			

Model # Stainless: STCS  
Model # Galvanneal: STCG

Standard Color is White, Optional Colors at Additional Cost - Samples Available

