

SUBMITTAL: MODEL TMP™ & TME™ ACCESS PANELS FOR PLASTER WALLS/CEILINGS PAGE 1 OF 2

These access panels feature a metal flange that is recessed 3/4" from the face of the frame for application of plaster. Model TME has additional expanded metal lath wings. A continuous hinge, ensures easy opening of the panel. Door size is order size. Finished with durable white powder coat paint..

SPECIFICATIONS TMP:

Door Panel: 16 gauge steel with concealed continuous hinge mounted on long side of panels.
Frame: 16 gauge steel with 1 3/8" wide metal flange and 3/4" deep plaster stop for application of plaster.
Sizes: Minimum Size 6" x 6", Max Size Wall: 36" x 48", Max Size Ceiling: 36" x 36".
Lock: Flush screwdriver-operated steel cam standard.

SPECIFICATIONS TME:

Door Panel: 16 gauge steel with concealed continuous hinge mounted on long side of panels.
Frame: 16 gauge steel with 1 3/8" wide metal flange and 3/4" deep plaster stop for application of plaster, and 2-3/4" galvanized expanded metal lath.
Sizes: Min Size 6" x 6", Max Size Wall: 36" x 48", Max Size Ceiling: 36" x 36".
Lock: Flush screwdriver-operated steel cam standard.

STEP 1: SELECT MODEL FROM PAGE 2 OR ENTER SIZE:


_____ For sizes not shown on chart. _____" W x _____" H (See sizes above)

STEP 2: SELECT NON-STANDARD FRAME AND DOOR OPTIONS AT ADDITIONAL COST:

- Cold Rolled Steel** _____ 14 gauge door with 16 gauge frame
 _____ 16 gauge door with 14 gauge frame
 _____ 14 gauge door with 14 gauge frame
- 304 Stainless Steel** _____ 14 gauge door with 16 gauge frame (Model TMPS and TMES)
 _____ 16 gauge door with 14 gauge frame
 _____ 14 gauge door with 14 gauge frame

STEP 3: SELECT OPTIONS AT ADDITIONAL COST

- | | |
|--------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|
| <input type="checkbox"/> Gasketing (3 sides) | <input type="checkbox"/> (U3) Mortise slam lock prep |
| <input type="checkbox"/> Louvered vents (attach louver selector page) | <input type="checkbox"/> (U4) Mortise slam lock (06431) installed |
| <input type="checkbox"/> Plexiglass view window | <input type="checkbox"/> (B1) Mortise deadbolt prep |
| <input type="checkbox"/> Removable Door (no hinges) | <input type="checkbox"/> (B2) Mortise deadbolt lock (06441) installed |
| <input type="checkbox"/> Optional color Code: _____ - see catalog or page 2 | <input type="checkbox"/> (C2) Torx head cam View Lock Options Online |
| <input type="checkbox"/> Alternate depth of trim flange: _____ | <input type="checkbox"/> (C3) Spanner head cam |
| <input type="checkbox"/> 316 Stainless construction (select SS option above) | <input type="checkbox"/> (C4) Hex head cam |
| <input type="checkbox"/> (L) Cylinder lock installed | <input type="checkbox"/> (C5) Knob cam |
| <input type="checkbox"/> (M1) Mortise cam lock prep 1-1/8" dia, 1-1/4" length | <input type="checkbox"/> Other 1-1/8" dia. mortise cylinder by request* |
| <input type="checkbox"/> (M2) Mortise cam lock (06431) installed | |
| <input type="checkbox"/> #0646 Brass Retaining Ring for MP (may be required for locks by others. | |
- *Note lock details here: _____
 See Separate Submittal for: Galvanneal Construction

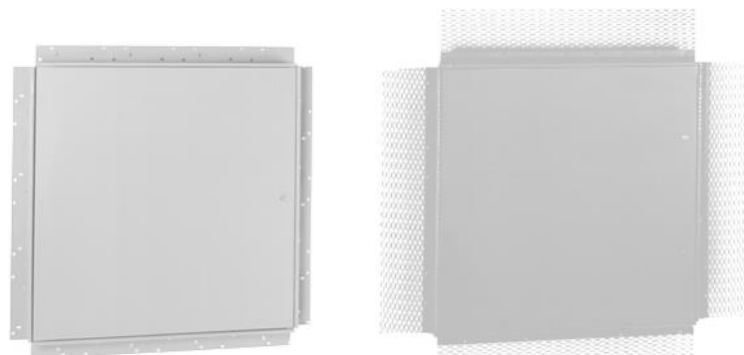

TMP with 1 3/8" wide Metal Flange

TME - 2 3/4" Plaster Stop with Expanded Metal Lath



Standard Cam Latch

Order Format Example: TMP-2424LBK




Model	Width	Height	Lock	Paint	Options
TMP			(C Std or Optional Lock/Latch Code)	Color	
TME					
TMPS					
TMES					

LATCH AND LOCK OPTIONS					
Mortise Lock (M2) (U4) (B2)	Cylinder Lock (L)	Torx Head Cam (C2)	Spanner Head Cam (C3)	Hex Head Cam (C4)	Knob Cam (C5)

<p>TMP AND TME ARE TRADEMARKS OF ACTIVAR PLEASE DOWNLOAD MOST CURRENT SUBMITTAL FROM WEBSITE BEFORE ORDERING</p>	Distributor:	Quantity:
	Contractor:	Approved By:
	Model #:	Architect:
	Project:	Date: © 2021 Activar Construction Products Group , Inc.
HEADQUARTERS: 9702 NEWTON AV S, BLOOMINGTON, MN 55431 PH: 800-554-6077 EMAIL: SALES@ACTIVARCPG.COM WWW.ACTIVARCPG.COM MANUFACTURING: BLOOMINGTON, MN & COMMERCE, CA WAREHOUSES: See Website for Locations 6/4/2021		

SUBMITTAL: MODEL TMP™ & TME™ ACCESS PANELS FOR PLASTER WALLS/CEILINGS PAGE 2 OF 2

TMP	TME	A - MODEL SIZE = DOOR SIZE	C-WALL OPENING DIMENSIONS FITS ± 1/8" OPENING SIZE		SHIPPING WEIGHT APPROX.	LATCH(ES)
QTY	QTY	WIDTH X HEIGHT	WIDTH	HEIGHT		
		12" x 12"	12 1/2"	12 1/2"	7 lbs	1
		16" x 16"	16 1/2"	16 1/2"	10 lbs	1
		16" x 20"	16 1/2"	20 1/2"	12 lbs	2
		18" x 18"	18 1/2"	18 1/2"	12 lbs	3
		24" x 24"	24 1/2"	24 1/2"	19 lbs	4
						TBD
<p>Sizes Not Shown May be Ordered in 1/4" Increments on Blank Line Above For Example 16-1/4", 16-1/2" or 16-3/4" Max Size Wall: 36" x 48", Max Size Ceiling: 36" x 36".</p>						

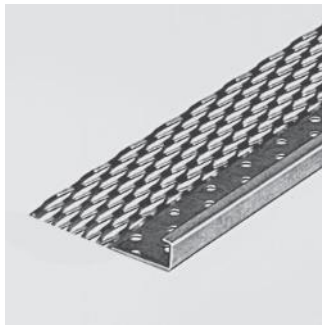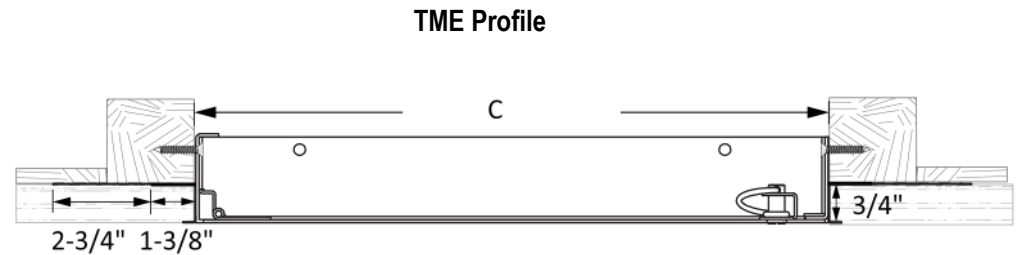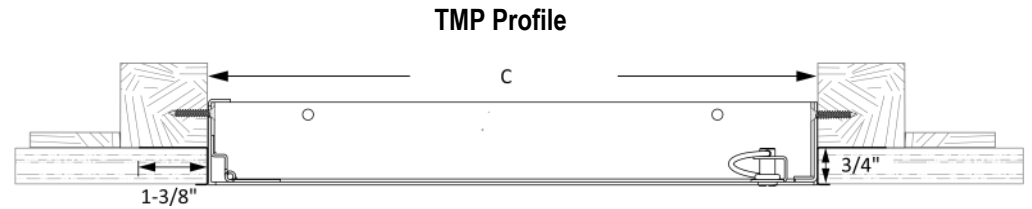

TME Expanded Metal Flange

Standard Color is White, Optional Colors at Additional Cost - Samples Available

W (White)	B (Bronze)	R (Red)	BK (Black)	S (Sand)	AB (AMS Beige)	SB (SC Beige)	G (Gray)	SI (Silver)
-----------	------------	---------	------------	----------	----------------	---------------	----------	-------------