SUBMITTAL: MODEL TMP™ & TME™ ACCESS PANELS FOR PLASTER WALLS/CEILINGS

These access panels feature a metal flange that is recessed 3/4" from the face of the frame for application of plaster. Model TME has additional expanded metal lath wings. A continuous hinge, ensures easy opening of the panel. Door size is order size. Finished with durable white powder coat paint...

SPECIFICATIONS TMP:

Door Panel: 16 gauge steel with concealed continuous hinge mounted on long side of panels.

Frame: 16 gauge steel with 1 3/8" wide metal flange and 3/4" deep plaster stop for application of plaster.

Sizes: Minimum Size 6" x 6", Max Size Wall: 36" x 48", Max Size Ceiling: 36" x 36".

Lock: Flush screwdriver-operated steel cam standard.

SPECIFICATIONS TME:

Door Panel: 16 gauge steel with concealed continuous hinge mounted on long side of panels.

Frame: 16 gauge steel with 1 3/8" wide metal flange and 3/4" deep plaster stop for application of plaster, and

2-3/4" galvanized expanded metal lath.

For sizes not shown on shart

Sizes: Min Size 6" x 6", Max Size Wall: 36" x 48", Max Size Ceiling: 36" x 36".

Lock: Flush screwdriver-operated steel cam standard.

STEP 1: SELECT MODEL FROM PAGE 2 OR ENTER SIZE:

I OI SIZES HOL SHOWN ON CHAIL.	VV A I	i (See Sizes above)	
STEP 2: SELECT NON-STANDARD	FRAME AND DOOR	OPTIONS AT ADDITION	AL COST:

Cold Rolled Steel H1 14 gauge door with 16 gauge frame **H4** 16 gauge door with 14 gauge frame ____ H14 14 gauge door with 14 gauge frame

304 Stainless Steel H1 14 gauge door with 16 gauge frame (Model TMPS and TMES)


____ **H4** 16 gauge door with 14 gauge frame **H14** 14 gauge door with 14 gauge frame

STEP 3: SELECT OPTIONS AT ADDITIONAL COST

(K) Gasketing (3 sides)	l
(L) Louvered vents (attach louver selector page)	Ĺ
(V) Plexiglass view window	Ĺ
(M) Removable Door (no hinges)	Ĺ
Optional color Code: see catalog or page 2	Ĺ
316 Stainless construction (select SS option above)	Ĺ
(L) Cylinder lock installed	Ĺ
(M1) Mortise cam lock prep 1-1/8" dia, 1-1/4" length	Ĺ
 (110) 14 (1 1 1 (00) 10 1) 1 (11 1	ſ

(M2) Mortise cam lock (06431) installed

#0646 Brass Retaining Ring for MP (may be required for locks by others.



" LI (Can aizon abaya)

(U4) Mortise slam lock (06431) installed

(B1) Mortise deadbolt prep

(B2) Mortise deadbolt lock (06441) installed

(C2) Torx head cam View Lock Options Online

(C3) Spanner head cam

(C4) Hex head cam (C5) Knob cam

Other 1-1/8" dia. mortise cylinder by request*

*Note lock details here:

See Separate Submittal for: Galvanneal Construction




TMP with 1 3/8" wide Metal Flange



TME - 2 3/4" Plaster Stop with **Expanded Metal Lath**



Standard Cam Latch



LATCH AND LOCK OPTIONS					
Mortise Lock (M2) (U4) (B2)	Cylinder Lock (L)	Torx Head Cam (C2)	Spanner Head Cam (C3)	Hex Head Cam (C4)	Knob Cam (C5)
		(0)	C	0	6



s		

9702 Newton Av S. Bloomington, MN 55431 | Many Locations Nationwide

800-554-6077

sales@activarcpg.com



www.activarcpg.com

Distributor:

Contractor:

Date:

Pages: 1 of 2

Project:

Approved By:

Architect:

Item #


Scale: N/A

1/22/2025

SUBMITTAL: MODEL TMP™ & TME™ ACCESS PANELS FOR PLASTER WALLS/CEILINGS PAGE 2 OF 2

TMP	TME	A - MODEL SIZE = DOOR SIZE	DIMEN FITS	OPENING ISIONS ± 1/8" NG SIZE	SHIPPING WEIGHT	LATCH(ES)
QTY	QTY	WIDTH X HEIGHT	WIDTH	HEIGHT	APPROX.	
		12" x 12"	12 1/2"	12 1/2"	7 lbs	1
		16" x 16"	16 1/2"	16 1/2"	10 lbs	1
		16" x 20"	16 1/2"	20 1/2"	12 lbs	2
		18" x 18"	18 1/2"	18 1/2"	12 lbs	3
		24" x 24"	24 1/2"	24 1/2"	19 lbs	4
						TBD

Sizes Not Shown May be Ordered in 1/4" Increments on Blank Line Above
For Example 16-1/4", 16-1/2" or 16-3/4"
Max Size Wall: 36" x 48", Max Size Ceiling: 36" x 36".

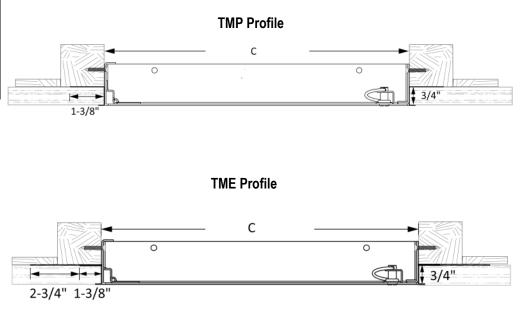



TME Expanded Metal Flange

