

SUBMITTAL: MODEL TMS™ STAINLESS STEEL FLUSH ACCESS PANELS

Model TMS is an all purpose stainless steel access door affords fast and convenient access for inspection or service to vital components of plumbing, heating, air conditioning and/or electrical systems. Use the TMS for hospital and restaurant applications. The 1" frame flange adds rigidity and conceals the rough wall openings. The concealed hinged door is mounted to the frame and swings open for ease in servicing and results in a door always closing square in place.

SPECIFICATIONS

- Frame:** 18 gauge, stainless steel with 1" wall flange. 1-5/8" depth.
- Door:** 16 gauge, stainless steel mounted with 90° continuous, concealed stainless steel hinge.
- Finish:** 304 stainless, #4 Satin finish.
- Lock:** Flush screwdriver-operated steel cam - C.
- Sizes:** Minimum 6" x 6", maximum 48" x 48"

STEP 1: SELECT MODEL FROM PAGE 2 OR ENTER SIZE:

___ For sizes not shown on chart. ___" W x ___" H (See sizes above)

STEP 2: SELECT NON-STANDARD FRAME AND DOOR OPTIONS AT ADDITIONAL COST:


- ___ 14 gauge door with 16 gauge frame
- ___ 16 gauge door with 14 gauge frame
- ___ 16 gauge door with 16 gauge frame
- ___ 14 gauge door with 14 gauge frame

STEP 3: SELECT OPTIONS AT ADDITIONAL COST

- | | |
|---|--|
| <input type="checkbox"/> Plexiglass view window | <input type="checkbox"/> (U3) Mortise slam lock prep |
| <input type="checkbox"/> Rain Hood | <input type="checkbox"/> (U4) Mortise slam lock (06431) installed |
| <input type="checkbox"/> Gasketing | <input type="checkbox"/> (B1) Mortise deadbolt prep |
| <input type="checkbox"/> Removable Door (no hinges) | <input type="checkbox"/> (B2) Mortise deadbolt lock (06441) installed |
| <input type="checkbox"/> (L) Cylinder lock installed | <input type="checkbox"/> (C5) Knob cam View Lock Options Online |
| <input type="checkbox"/> (M1) Mortise cam lock prep: 1-1/8" Ø, 1-1/4" length | <input type="checkbox"/> (C2) Torx head cam |
| <input type="checkbox"/> (M2) Mortise cam lock (06431) installed | <input type="checkbox"/> (C4) Hex head cam |
| <input type="checkbox"/> #0646 Brass Retaining Ring for M1
(may be required for locks by others) | <input type="checkbox"/> (C3) Spanner head cam |
| | <input type="checkbox"/> Other 1-1/8" dia. mortise cylinder by request
Note details here: _____ |



Standard Cam Latch

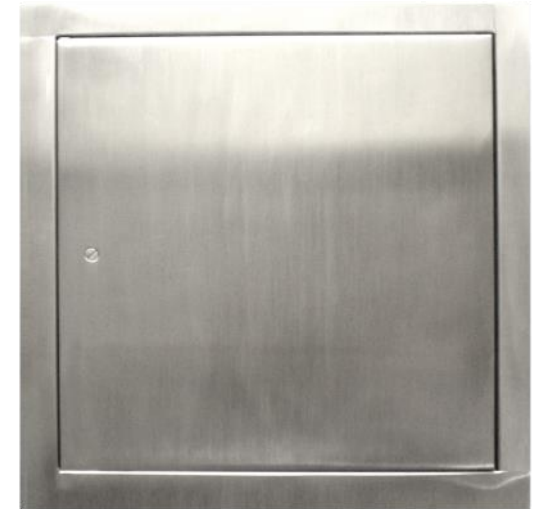

Order Format Example: TMS-2424C

TMS - Width Height Lock Options
(C Std or Optional Lock/Latch Code)


Please Note - Lock Option Codes have Changed.

LATCH AND LOCK OPTIONS

Mortise Lock (M2) (U4) (B2)	Cylinder Lock (L)	Torx Head Cam (C2)	Spanner Head Cam (C3)	Hex Head Cam (C4)	Knob Cam (C5)

<p>JL INDUSTRIES</p> <p>9702 Newton Av S. Bloomington, MN 55431 Many Locations Nationwide</p>	<p>800-554-6077</p> <p>sales@activarcpg.com</p> <p>www.activarcpg.com</p>	Distributor:	Project:
		Contractor:	Approved By:
	Date:	Quantity:	Architect:
	Scale: N/A	Pages: 1 of 1	Item #

Qty	A-Model Size = Door Size	B-Outside Frame Dimensions 1" Trim Flange		C-Wall Opening Dimensions Fits ± 1/8" Opening Size		Approx. Ship Wt. (lbs)	Latch(es)
	Width X Ht	Width	Height	Width	Height		
	6" x 6"	8"	8"	6 1/2"	6 1/2"	4	1
	8" x 8"	10"	10"	8 1/2"	8 1/2"	4	1
	8" x 12"	10"	14"	8 1/2"	12 1/2"	6	1
	10" x 10"	12"	12"	10 1/2"	10 1/2"	6	1
	12" x 12"	14"	14"	12 1/2"	12 1/2"	7	1
	12" x 16"	14"	18"	12 1/2"	16 1/2"	9	1
	12" x 18"	14"	20"	12 1/2"	18 1/2"	10	1
	12" x 24"	14"	26"	12 1/2"	24 1/2"	12	2
	14" x 14"	16"	16"	14 1/2"	14 1/2"	9	1
	16" x 16"	18"	18"	16 1/2"	16 1/2"	11	1
	16" x 20"	18"	22"	16 1/2"	20 1/2"	13	2
	18" x 18"	20"	20"	18 1/2"	18 1/2"	20	3
	20" x 24"	22"	26"	20 1/2"	24 1/2"	15	4
	20" x 30"	22"	32"	20 1/2"	30 1/2"	20	4
	22" x 22"	24"	24"	22 1/2"	22 1/2"	17	4
	22" x 30"	24"	32"	22 1/2"	30 1/2"	22	4
	22" x 36"	24"	38"	22 1/2"	36 1/2"	24	5
	24" x 24"	26"	26"	24 1/2"	24 1/2"	18	4
	24" x 30"	26"	32"	24 1/2"	30 1/2"	22	5
	24" x 36"	26"	38"	24 1/2"	36 1/2"	25	5
	30" x 30"	32"	32"	30 1/2"	30 1/2"	30	5
	36" x 36"	38"	38"	36 1/2"	36 1/2"	41	5
	36" x 48"	38"	50"	36 1/2"	48 1/2"	51	6
	Other Size					TBD	TBD
<p>Sizes Not Shown May be Ordered in 1/4" Increments on Blank Line Above For Example 16-1/4", 16-1/2" or 16-3/4" Minimum Size 6" x 6", Max Size 48" x 48"</p>							

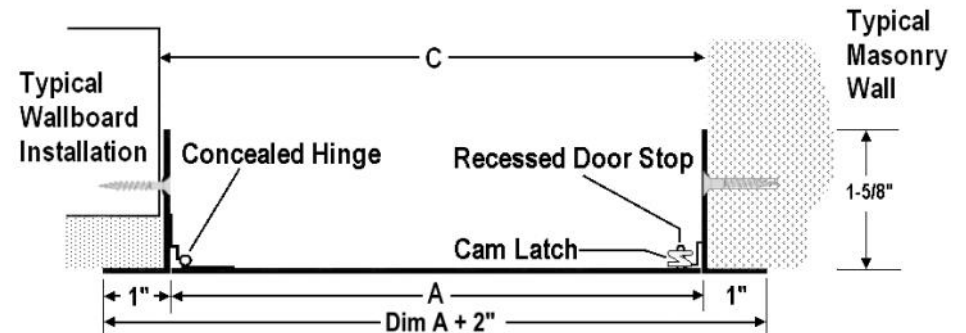

See website for items that are available on our stock list.