


ACCESS PANEL - EXTERIOR FOR PLASTER AND STUCCO - XTEA AND XTES

Select this exterior access panel design with energy efficiency in mind. 2 inches of polyisocyanurate provides an R-value of 13, and dual layered gasketing provides the weather-resistance you need. Door opens to 170°.



XTEA with Standard Latch

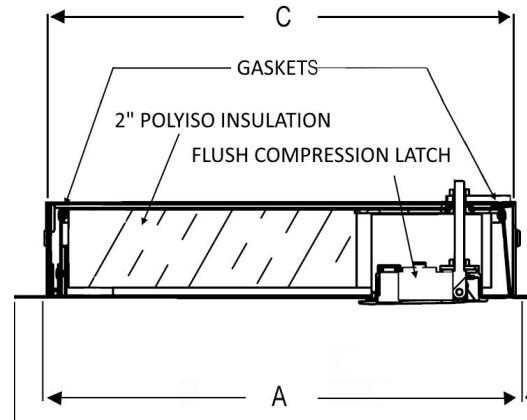

SPECIFICATIONS:

___ Model XTEA - Galvanneal and Aluminum

Frame: 16 ga. Galvanneal steel frame with flange recessed 3/4"; 2-3/4" wide galvanized expanded metal lath

Door: 2" Thick polyisocyanurate Insulation, .040 Aluminum door panel with continuous stainless steel hinge, and R-value 13.0

Gaskets: Adhesive backed EPDM foam silicone rubber seals on frame and door.

Finish: White powder coat paint.

Handle: (F4) Lockable compression paddle latch, black

___ Model XTES (Stainless Steel)

Frame: 16 ga. Stainless Steel Frame with flange recessed 3/4"; 2-3/4" wide galvanized expanded metal lath.

Door: 2" Thick polyisocyanurate insulation, 20 ga. stainless steel door with continuous stainless steel hinge, and R-value of 13.0

Gaskets: Adhesive backed EPDM foamed silicone rubber seal on frame and door.

Finish: 304 Stainless - No. 4 Finish

Handle: (F4) Lockable compression Paddle latch, black

Sizes:

ORDER SIZE IS DOOR SIZE. Minimum 8" x 8". Maximum 48" x 48". CLEAR OPENING: Door size minus 1-1/4".

OPTIONAL FEATURES:

___ Optional color code

QTY	Size (A) Width x Height	Wall Opening (C) Width x Height	Handles	Approx Ship Weight in lbs.	QTY	Size (A) Width x Height	Wall Opening (C) Width x Height	Handles	Approx Ship Weight in lbs.
	12" x 12"	12-3/8" x 12-3/8"	1	11		24" x 30"	24-3/8" x 30-3/8"	2	40
	14" x 14"	14-3/8" x 14-3/8"	1	15		24" x 36"	24-3/8" x 36-3/8"	2	42
	18" x 18"	18-3/8" x 18-3/8"	1	19		24" x 48"	24-3/8" x 48-3/8"	2	57
	20" x 24"	20-3/8" x 24-3/8"	1	30		30" x 30"	30-3/8" x 30-3/8"	2	44
	20" x 30"	20-3/8" x 30-3/8"	2	32		30" x 36"	30-3/8" x 36-3/8"	2	56
	22" x 30"	22-3/8" x 30-3/8"	2	34		36" x 36"	36-3/8" x 36-3/8"	2	61
	22" x 36"	22-3/8" x 36-3/8"	2	40		36" x 48"	36-3/8" x 48-3/8"	2	75
	24" x 24"	24-3/8" x 24-3/8"	1	27		48" x 48"	48-3/8" x 48-3/8"	2	108
	CUSTOM SIZE								

It is the responsibility of the customer to communicate specifications and product performance requirements that are needed for their application. This document is intended to convey potential product configurations and offerings. It is not to be used to imply or represent a specification or rating, of finished products shipped. Detailed, specific submittals can be created upon request. It is the responsibility of the customer to specify product accordingly to comply with local laws, codes, and ordinances.



JL INDUSTRIES

9702 Newton Avenue S, Bloomington, MN 55431

800-554-6077

sales@activarcpg.com

www.activarcpg.com

Distributor:

Contractor:

Date:

Scale: N/A

Page 1 of 1

Project:

Approved By:

Architect:

Item#: