
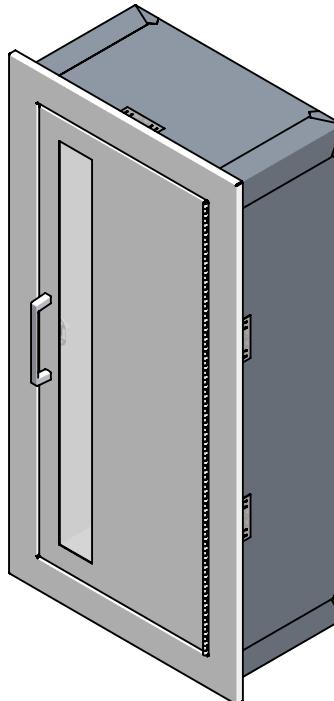


Architectural Series, Fire Protection Cabinet, Ambassador - C1015V10FX2

FE FX2 CABINET, AMBASSADOR, 3/8" FT, VERT DUO, CLR ACR, ALL CRS, ALL WHT, 10 TUB

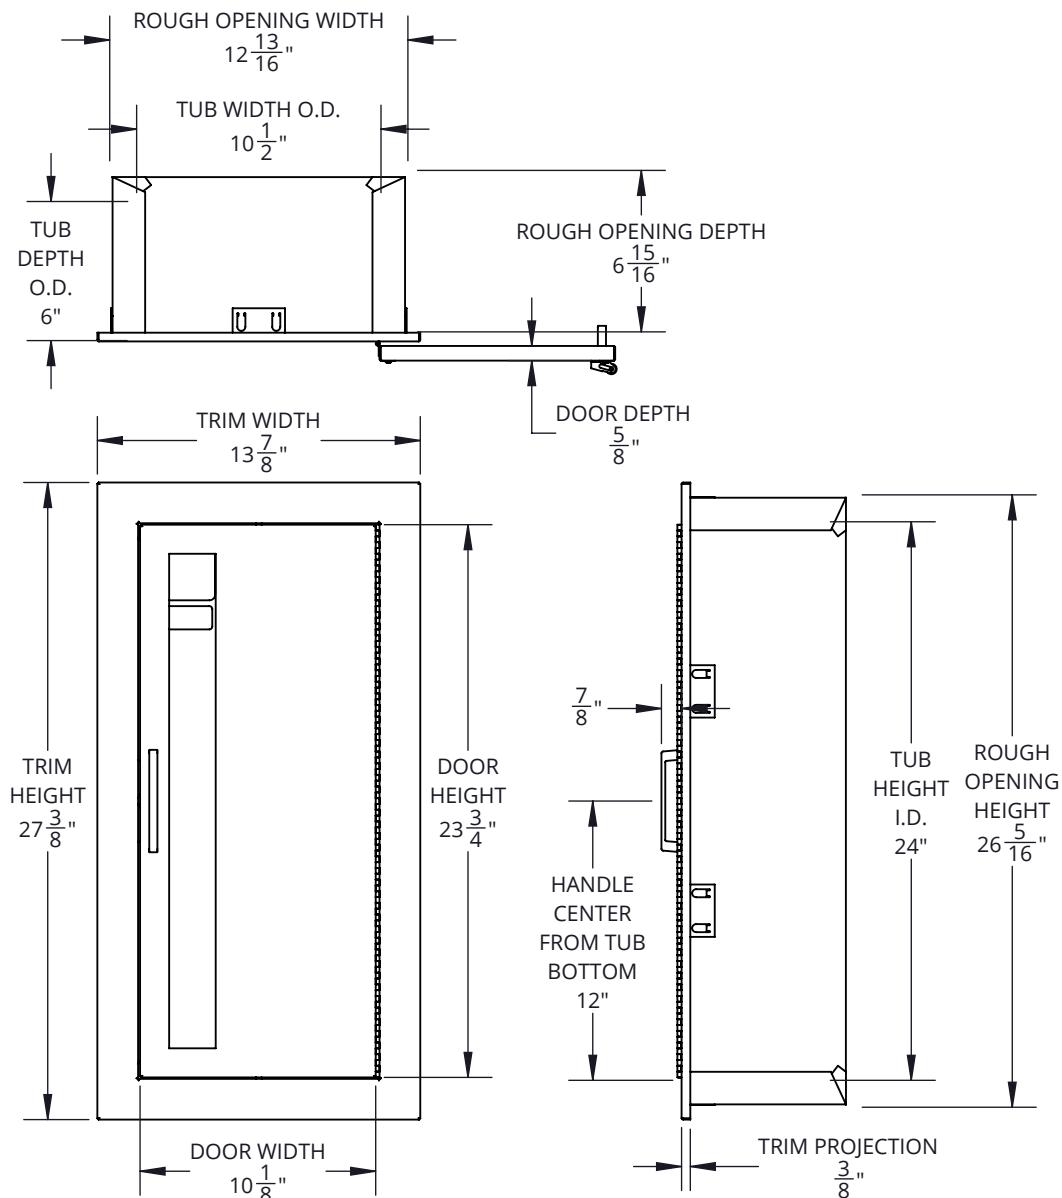

SPECIFICATIONS:

Tub Material: 24 gauge galvanized steel

Trim Material & Style: 20 gauge CRS, fully recessed 3/8" square edge

Door Material & Style: 20 gauge CRS, vertical duo

Flange Material: 22 gauge galvannealed steel

Glazing: 0.090" clear acrylic (8-1/2" x 22-3/4")

Finish: Powder coat white door and trim, painted white tub

Hinge: Continuous hinge opens door 180 degrees, 20 gauge CRS powder coat white

Hardware: Zinc plated pull handle, roller catch, glass clips & screws

Rough Opening: 12-13/16" x 26-5/16" x 6-15/16"

Fire Rating: UL classified and labeled up to 2 hours in accordance with UL 1479 (ASTM-E814) and CAN/USC-S115.

Insulation: Foil-faced mineral wool

ADA Compliant: Cabinet meets 4" maximum protrusion, locate handle maximum 48" above floor

Compatible Extinguisher: Cosmic, Galaxy 2.5 - 10lb, Mercury 2.5 - 5lb, Sentinel 5lb

MODEL # BREAKDOWN:

C — Product Line: Fire protection, cabinet

— Tub Material: Galvanized

10 — Tub Size: 10-1/2" x 24" x 6"

1 — Trim and Door Material: CRS, powder coat finish

5 — Trim Style: Fully recessed 3/8" square edge

V — Door Style: Vertical duo, pull handle, roller catch

10 — Door Glazing: 0.090" clear acrylic

FX2 — Fire Rated

— Color: All white

REPLACEMENT PARTS:

Tub: TUB-10-5FX2

Trim: T-1015

Door: D-101V

Glazing: G10F10

Hardware Pack: HPFPUS

MODEL #: C1015V10FX2



JL INDUSTRIES

800-554-6077

sales@activarcpg.com

www.activarcpg.com

9702 Newton Ave S. Bloomington, MN 55431 | Many Locations Nationwide

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF ACTIVAR CONSTRUCTION PRODUCTS GROUP, INC.
ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF ACTIVAR CONSTRUCTION PRODUCTS GROUP, INC. IS PROHIBITED.

Distributor:		Project:	
Contractor:		Approved By:	
Date:	Quantity:	Architect:	
Scale: 1:8.25	Pages: 1 OF 1	Drawing #:	C1015V10FX2-SUBMITTAL