


Specialty Series, Fire Protection Cabinet Security - CSF1010K1E

SFC-12, FE CABINET, SECURITY, 2-1/2" SQ TRIM, SLD, INSTALL AIRTEQ 5010, W/O KEY, ALL CRS, WHT, SF10 TUB, DET DBOLT

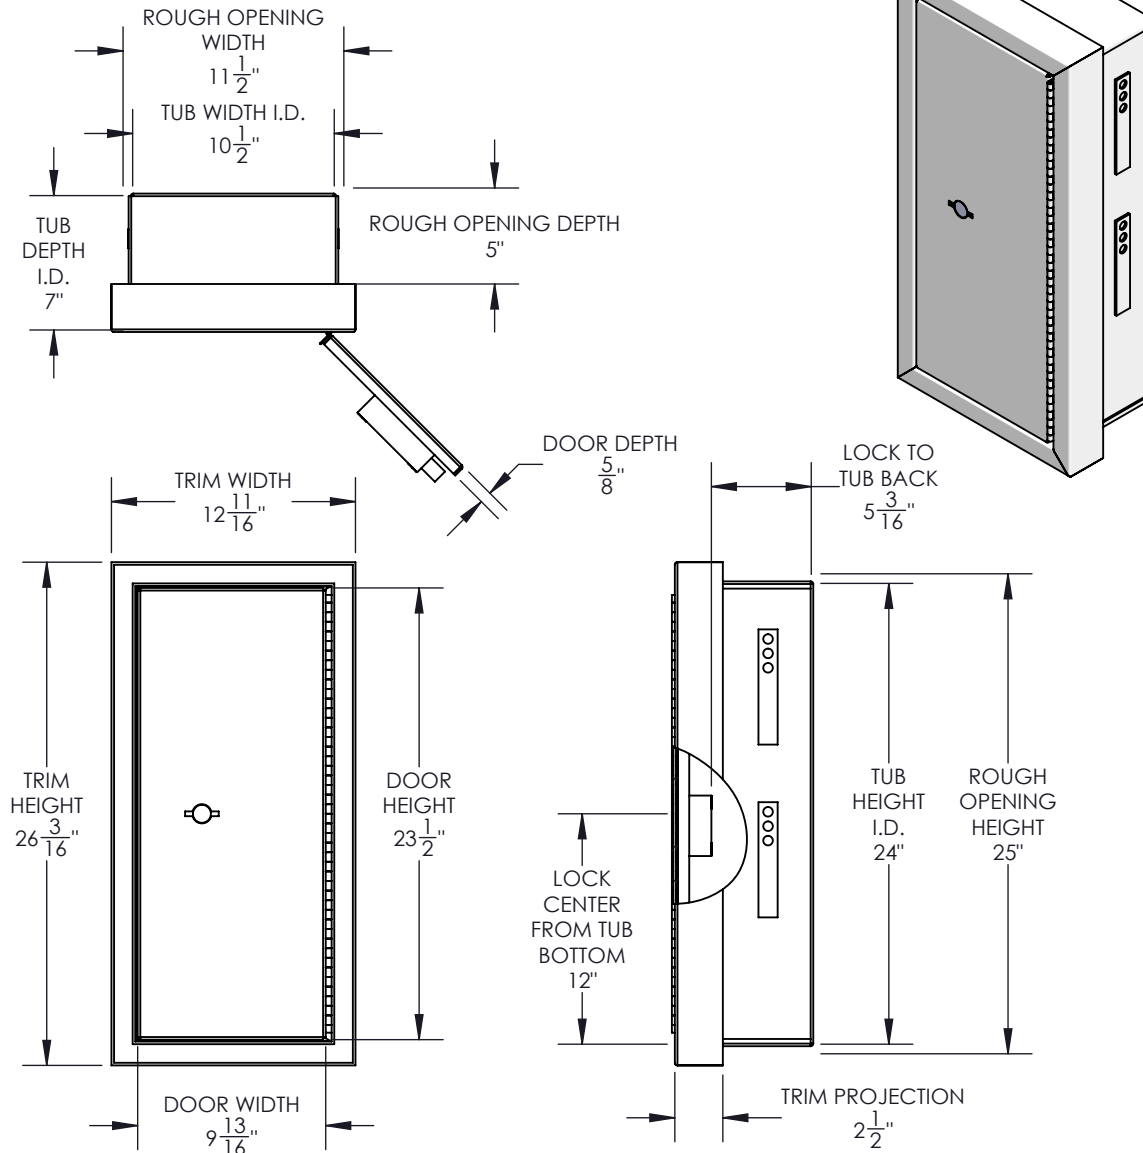

SPECIFICATIONS:

Tub Material: 12 ga Cold Rolled Steel (CRS)

Trim Material & Style: 12 ga CRS, semi-recessed 2-1/2" square edge

Door Material & Style: 12 ga CRS, Detention slam lock

Finish: Powder coat white

Hinge: Continuous hinge opens door ~ 135 degrees, 16 gauge CRS powder coat white

Lock: Install Airteq 5010, w/o key

Rough Opening: $11\frac{1}{2}"$ x $25"$ x $5"$

Fire Rating: Not rated

ADA Compliance: Cabinet meets 4" maximum protrusion, locate handle maximum 48" above floor

Compatible Extinguisher: Cosmic & Galaxy 2.5-10, Mercury 2.5-5, Sentinel 5 Extinguisher

MODEL # BREAKDOWN:

CSF — Product Line: Fire protection, cabinet

10 — Tub Size: $10\frac{1}{2}"$ x $24"$ x $7"$

1 — Tub, Trim, and Door Material: CRS, powder coat finish

0 — Trim Style: Semi-recessed 2-1/2" square edge

— Door Style: Solid, locking

K1E — Lock: Detention slam, Airteq 5010, Lock installed

— Color: All white

MODEL #: CSF1010K1E



JL INDUSTRIES

9702 Newton Avenue S, Bloomington, MN 55431

800-554-6077

sales@activarcpg.com

www.activarcpg.com

Distributor:

Contractor:

Date:

Scale: 1:10

Page: 1 OF 1

Project:

Approved By:

Architect:

Drawing #: CSF1010K1E-SUBMITTAL