
DOOR EDGE GUARDS - STANDALONE ASTRAGAL FOR DOOR - DA

Standalone Astragal, help mitigates sound, light, weather, and smoke infiltration.

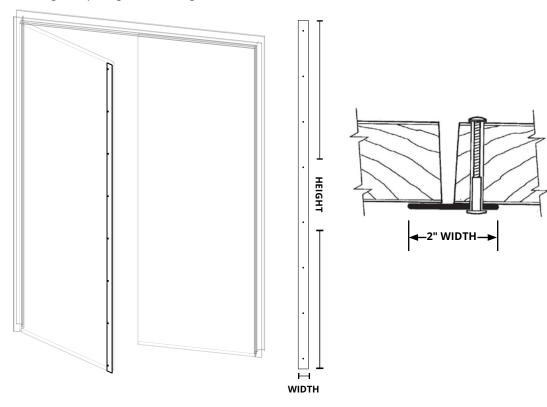

QTY		MATERIAL	-	HEIGHT		FINISH	-			(OPTIONS)
	DA	(Cold-Rolled Steel)	-		В	Bronze	-		WH*	(WH Fire-Rated Marking)
		E (Zinc-Plated)			АВ	AMS Beige			LL	(Leadlined)
		S (Stainless Steel)			SB	SC Beige	* Marked on request only			
					S	Sand				
					G	Gray				
					SI	Silver				
					W	White				
					ВК	Black				
					FB	Flat Black				
					ВА	Brass				

SPECIFICATIONS:

Standard Material: 1/8"cold rolled steel
Standard Finish: Mineral bronze powder coat

Mounting: Countersunk mounting holes. #8 throughbolt

Width: 2" wide

Height: Standard: 80" Maximum: 108"

Door Depth: 1-34"

ADDITIONAL OPTIONS:

Optional Materials:

1/8" US32D stainless steel 1/8" zinc-plated steel

Cutouts: Available at additional cost. See cutout pages.

FIRE-RATING:

Intertek - Warnock Hersey listed for up to 90 min. **Marked on request only.**

Tested to: ASTM E152-81a, UBC 7-2, NFPA 252, UL 10B, UL 10C, CAN / ULC S104

It is the responsibility of the customer to communicate specifications and product performance requirements that are needed for their application. This document is intended to convey potential product configurations and offerings. It is not to be used to imply or represent a specification or rating, of finished products shipped. Detailed, specific submittals can be created upon request. It is the responsibility of the customer to specify product accordingly to comply with local laws, codes, and ordinances.

