


DOOR EDGE GUARDS - STANDALONE ASTRAGAL FOR DOOR - DA

Standalone Astragal, help mitigates sound, light, weather, and smoke infiltration.

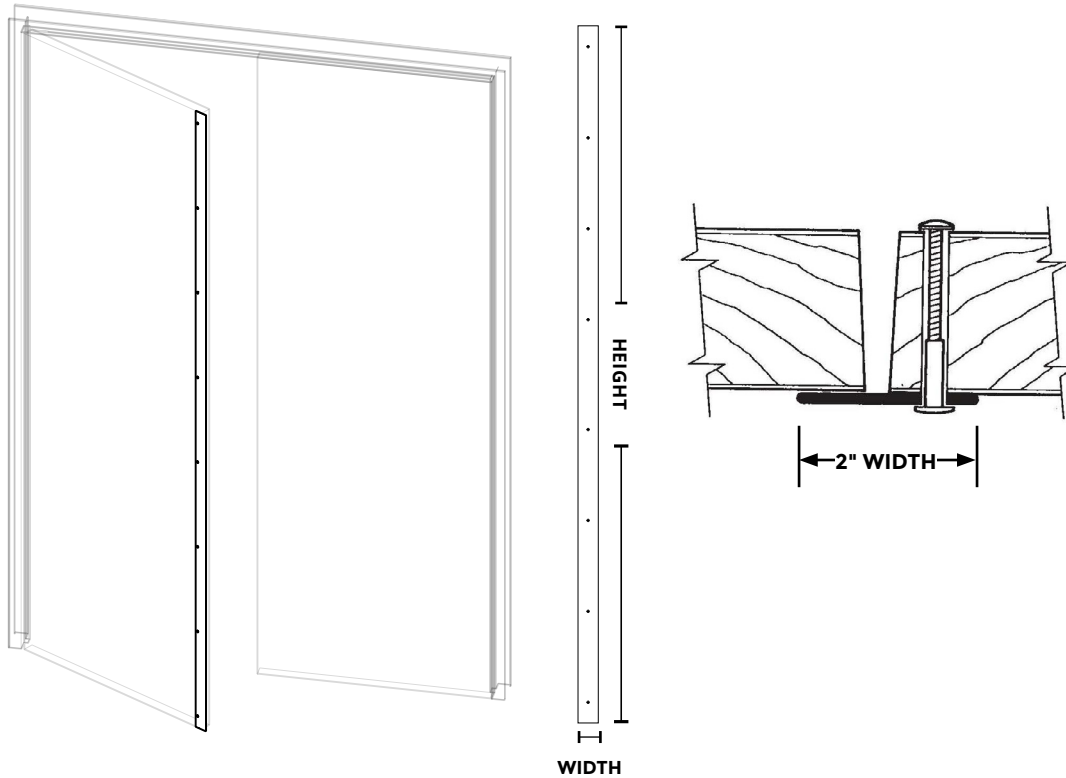

SPECIFICATIONS:

Standard Material: 1/8" cold rolled steel

Standard Finish: Mineral bronze powder coat

Mounting: Countersunk mounting holes. #8 throughbolt

Width: 2" wide

Height:

Standard: 80"

Maximum: 108"

Door Depth: 1-3/4"

ADDITIONAL OPTIONS:

Optional Materials:

18 US32D stainless steel

1/8" zinc-plated steel

Cutouts: Available at additional cost. See cutout pages.

FIRE-RATING:

Intertek - Warnock Hersey listed for up to 90 min on the DL models. **Marked on request only.**

Tested to: ASTM E152-81a, UBC 7-2, NFPA 252, UL 10B, UL 10C, CAN / ULC S104

QTY	MATERIAL	HEIGHT	FINISH	(OPTIONS)
	DA (Cold-Rolled Steel)		B Bronze	WH* (WH Fire-Rated Marking)
	E (Zinc-Plated)		AB AMS Beige	LL (Leadlined)
	S (Stainless Steel)		SB SC Beige	
			S Sand	
			G Gray	
			SI Silver	
			W White	
			BK Black	
			FB Flat Black	
			BA Brass	



800-554-6077
 sales@activarcpg.com
 www.activarcpg.com

9702 Newton Ave S. Bloomington, MN 55431 | Many Locations Nationwide

Distributor:

Project:

Contractor:

Approved By:

Date:

Architect:

Scale: N/A

Pages: 1 of 1

Item #: