



ENTRANCE MAT - Activ-Mat™ EM800 Series - Aluminum Roll-Up Mat

EFSA

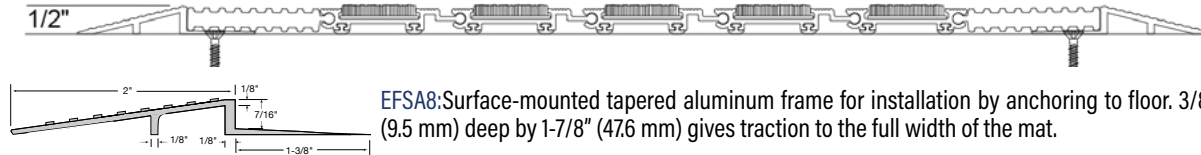

EFSA8: Surface-mounted tapered aluminum frame for installation by anchoring to floor. 3/8" (9.5 mm) deep by 1-7/8" (476 mm) gives traction to the full width of the mat.

EFSV

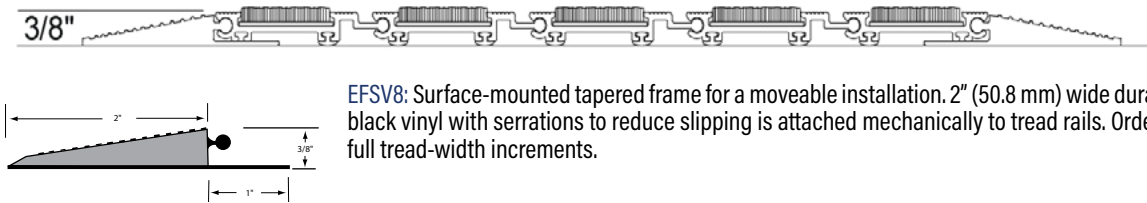

EFSV8: Surface-mounted tapered frame for a moveable installation. 2" (50.8 mm) wide durable black vinyl with serrations to reduce slipping is attached mechanically to tread rails. Order in full tread-width increments.

EFST



EFST8: Surface-mounted tapered vinyl frame with integral rubber tray under entire mat. Clean up of debris that falls under the mat is easy, and protects flooring. Order in full tread-width increments.

**ACTIV-MAT™ 800 SERIES:
ALUMINUM HINGES, LOW PROFILE, MEDIUM DUTY**

The durable 800 series with aluminum hinges stands up to dirt with both the tread of your selection and aluminum scraping bars built in to each rail. The 800 series can be surface-mounted or recessed.

FEATURES:

- Aluminum hinges are more durable than vinyl hinges.
- Mat rolls up compactly for cleaning.
- Dirt and moisture fall through drainage holes between tread rails.
- Add to existing entryway with the surface-mounted frame.



PRODUCT DETAILS:

- Rail Material:** 6063-T6 extruded aluminum alloy
- Frame Material:**
 - EFRA & EFRT: 6063-T6 extruded aluminum alloy
 - EFSA & EFRC: 6063-T5 extruded aluminum alloy
 - EFSV: Vinyl tapered
 - EFST: Vinyl tapered frame with integral recycled rubber tray.
- Depth:** 3/8" (9.5 mm).
- Standard Finish:** Mill
- Tread Spacing:** 2" (50.8 mm) on center with 6 treads per foot in the direction of travel.
- Spacing Between Rails:** Heel-proof spacing of 3/16"
- Rolling Wheel Load Rating:** 350 lbs

NOTE:

- Verify traffic direction - traffic to run perpendicular to rails.
- Maximum single mat size not to exceed 12'-0" (3.66m) in width (dim "x") or 100 sq. ft.
- If multiple sections, verify sectioning does not occur in traffic path.
- Vinyl filler to be trimmed in field for tight fit.
- Mat dimensions allow for clearance between mat section(s) and frame(s) in width (dim "x").
- Additional product information including installation instructions may be found at www.activarcpg.com/jl-industries

ACTIV-MAT 800 SERIES INSERTS

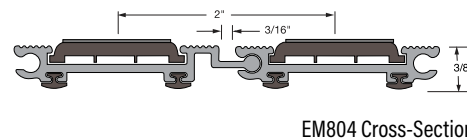

EM804 Cross-Section




9702 Newton Ave S. Bloomington, MN 55431 | Many Locations Nationwide
 800-554-6077 952-835-2218 sales@activarcpg.com www.activarcpg.com

**Entrance Mat
Activ-Mat™ EM800 Series
Data Sheet**


ENTRANCE MAT - Activ-Mat™ EM800 Series - Aluminum Roll-Up Mat

EFRA

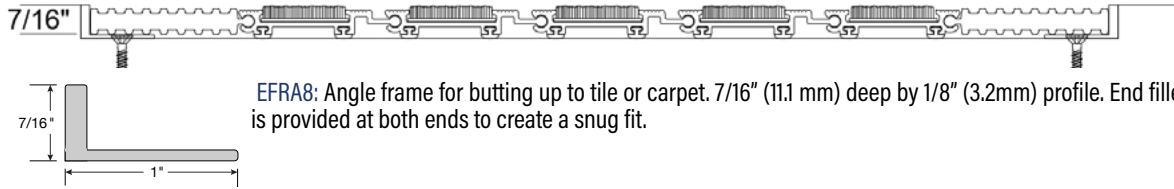


EFRA8: Angle frame for butting up to tile or carpet. 7/16" (11.1 mm) deep by 1/8" (3.2mm) profile. End filler is provided at both ends to create a snug fit.

EFRC

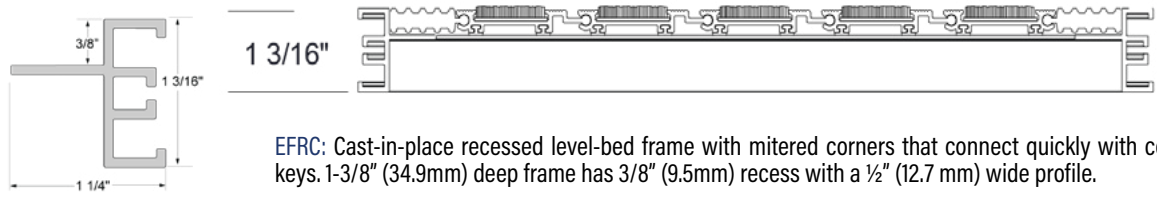


EFRC: Cast-in-place recessed level-bed frame with mitered corners that connect quickly with corner keys. 1-3/8" (34.9mm) deep frame has 3/8" (9.5mm) recess with a 1/2" (12.7 mm) wide profile.

EFRT

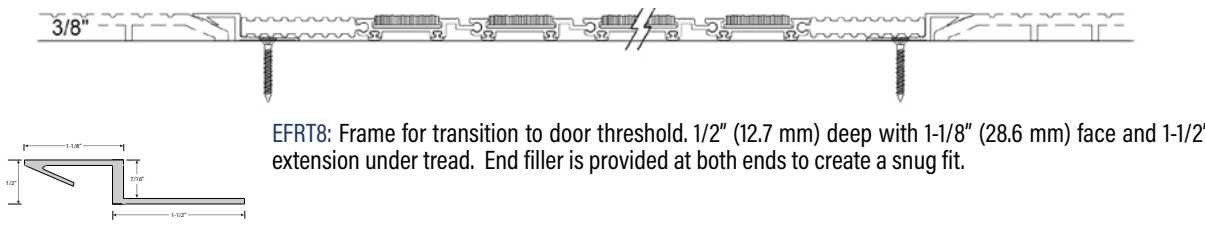

EFRT8: Frame for transition to door threshold. 1/2" (12.7 mm) deep with 1-1/8" (28.6 mm) face and 1-1/2" extension under tread. End filler is provided at both ends to create a snug fit.

ACTIV-MAT 800 SERIES INSERTS

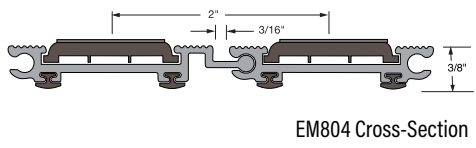

**ACTIV-MAT™ 800 SERIES:
ALUMINUM HINGES, LOW PROFILE, MEDIUM DUTY**

The durable 800 series with aluminum hinges stands up to dirt with both the tread of your selection and aluminum scraping bars built in to each rail. The 800 series can be surface-mounted or recessed.

FEATURES:

- Aluminum hinges are more durable than vinyl hinges.
- Mat rolls up compactly for cleaning.
- Dirt and moisture fall through drainage holes between tread rails.
- Add to existing entryway with the surface-mounted frame.

PRODUCT DETAILS:

Rail Material: 6063-T6 extruded aluminum alloy
Frame Material:
 EFRA & EFRT: 6063-T6 extruded aluminum alloy
 EFSA & EFRC: 6063-T5 extruded aluminum alloy
 EFSV: Vinyl tapered
 EFST: Vinyl tapered frame with integral recycled rubber tray.
Depth: 3/8" (9.5 mm).
Standard Finish: Mill
Tread Spacing: 2" (50.8 mm) on center with 6 treads per foot in the direction of travel.
Spacing Between Rails: Heel-proof spacing of 3/16".
Rolling Wheel Load Rating: 350 lbs

NOTE:

Verify traffic direction - traffic to run perpendicular to rails.
 Maximum single mat size not to exceed 12'-0" (3.66m) in width (dim "x") or 100 sq. ft.
 If multiple sections, verify sectioning does not occur in traffic path.
 Vinyl filler to be trimmed in field for tight fit.
 Mat dimensions allow for clearance between mat section(s) and frame(s) in width (dim "x").
 Additional product information including installation instructions may be found at www.activarcpg.com/jl-industries



9702 Newton Ave S. Bloomington, MN 55431 | Many Locations Nationwide
 800-554-6077 952-835-2218 sales@activarcpg.com www.activarcpg.com

**Entrance Mat
Activ-Mat™ EM800 Series
Data Sheet**