
ENTRANCE GRATE - ACTIV-GRATE™ — EG400 SERIES 1/2" ROLL-UP WITH EFRA4 RECESSED ANGLE FRAME

The 400 Series grate is designed for heavy-duty, high-traffic areas with a 750 lb wheel load rating. Densely spaced treads provide more surface area than mats, to keep your building cleaner. Contains LDPE hinges to cushion each tread rail that is quieter than aluminum hinges. Grate rolls up compactly for ease of cleaning. Drainage holes between tread rails allows moisture and dirt to fall below mat.

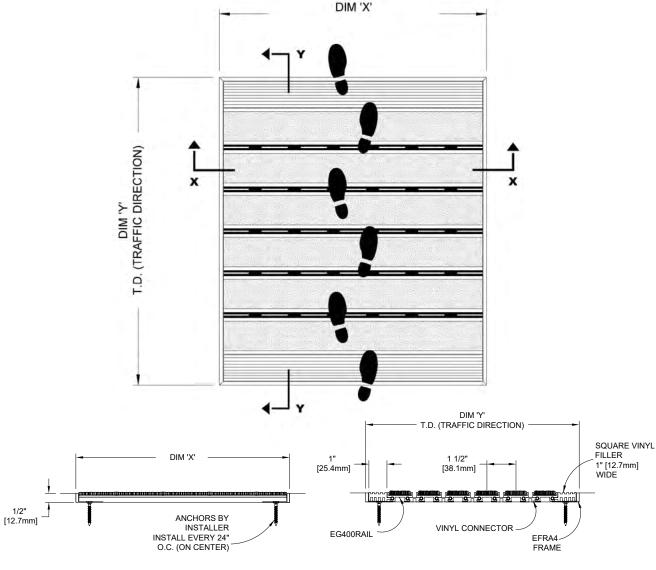

SPECIFICATIONS:

ALUMINUM ROLL-UP ENTRANCE GRATE WITH LDPE HINGES

Material: 6063-T6 extruded aluminum alloy tread rails and

frames

Tread Depth: 1/2" (12.7 mm)

Standard Finish: Mill

Tread Spacing: 1-1/2" (38.1 mm) on center with 8 treads per foot in


the direction of travel


Spacing Between Rails: 1/8" (3.2 mm)
Rolling Wheel Load Rating: 750 lbs

NOTES:

- Verify traffic direction traffic to run perpendicular to rails.
- Maximum single section size not to exceed 12'-0" (3.66m) in width (dim "x") or 100 sq. ft.
- If multiple sections, verify sectioning does not occur in traffic path.
- Vinyl filler on the ends of the traffic directions to be trimmed in field for tight fit.
- Mat dimensions allow for clearance between mat section(s) and frame(s) in width (dim "x").
- Additional product information including installation instructions may be found on our website.


Interpretation of fire and building codes may vary. Consult with the local authority having jurisdiction (AHJ) to determine appropriate standards.



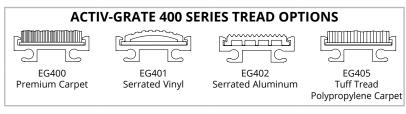

1 - SELECT GRATE OPTIONS MADE-TO-ORDER ACTIV-GRATE™ EG400 SERIES WITH EFRA4 FRAME - EXAMPLE: EG400M-556509

MODEL OF	GRATE	TREA	D OPTIONS	R	AIL FINISH	- (QTY)	WIDT	H TRAFFIC LENGTH	TREAD COLOR*	ситоитѕ
EG40 Roll up grating	EG40 Roll up grating			М мі	I				02 Carpet - Silvermine	N Notch Cut
EG41 Roll up grating with alternating trea		1 Vinyl		C Clear Anodized					03 Carpet - Walnut	A Angle Cut
		2 Ser	rated Aluminum	B Bla	ick Anodized				09 Carpet - Pepper	R Radius Cut
		5 Tuf	f Tread™	L Lig	ht Bronze Anodized				21 Vinyl - Black	C Column Cut
				D Me	D Medium Bronze Anodized				22 Vinyl - Gray	
			Z Dark Bronze Anodize						23 Vinyl - Brown	
2 - SELECT FRAME OPTIONS MADE-TO-ORDER ACTIV-GRATE™ EG400 SERIES WITH EFRA4 FRAME									41 Tuff Tread - Ash	
									42 Tuff Tread - Coal	
									43 Tuff Tread - Mocha	
MODEL / FRAME TYPE FRAME FINISH -			- WIDTH TRAFFIC CUTOUTS						Other - Specify below:	
EFRA4 Recessed Angle	M Mill		Size as indicated above		Cutouts as indicated al	bove				
	C Clear Anodized								*See website for full list of tread colors	
	B Black Anodized							ns and options must be identica		
	L Light Bronze An	nodized							izing may be different as entere	
	D. Madium Dranza	Anadisad				an	and traffic length columns. Please indicate quantity, which is			

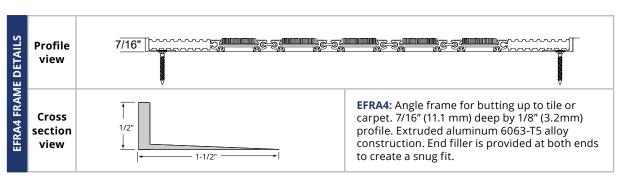

D Medium Bronze Anodized

Z Dark Bronze Anodized

EFRA4 RECESSED TAPERED FRAME DETAILS

Material: 6063-T5 and 6063-T6 extruded aluminum alloy tread rails and frames

Depth: 1/2" (12.7 mm) Standard Finish: Mill

Tread Spacing: 1-1/2" (38.1 mm) on center with 8 treads per foot

in the direction of travel

needed, then create a new submittal.

Spacing Between Rails: Heelproof spacing of 5/32"

NOT included in the part number. If other tread options, etc. are

Rolling Wheel Load Rating: 750 lbs

It is the responsibility of the customer to communicate specifications and product performance requirements that are needed for their application. This document is intended to convey potential product configurations and offerings. It is not to be used to imply or represent a specification or rating, of finished products shipped. Detailed, specific submittals can be created upon request. It is the responsibility of the customer to specify product accordingly to comply with local laws, codes, and ordinances.

© 2025 Activar Construction Products Group, Inc.