
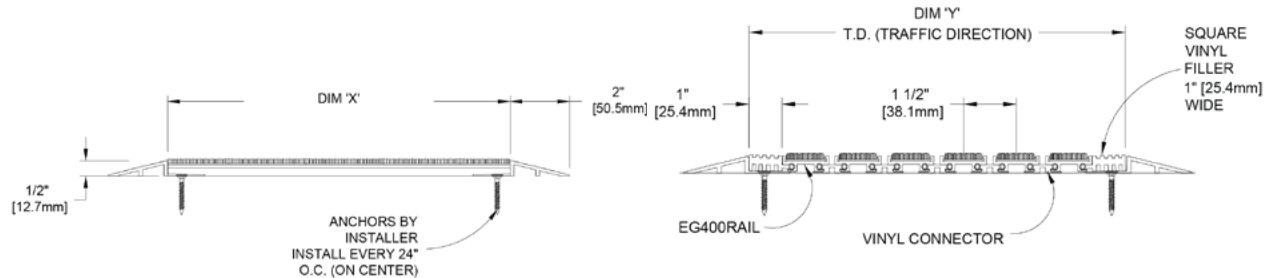


ENTRANCE GRATE - ACTIV-GRATE™ — EG400 SERIES 1/2" ROLL UP WITH EFSA4 SURFACE-MOUNTED ALUMINUM FRAME

The 400 Series grate is designed for heavy-duty, high-traffic areas with a 750 lb wheel load rating. Densely spaced treads provide more surface area than mats, to keep your building cleaner. Contains LDPE hinges to cushion each tread rail that is quieter than aluminum hinges. Grate rolls up compactly for ease of cleaning. Drainage holes between tread rails allows moisture and dirt to fall below mat.

PLAN VIEW

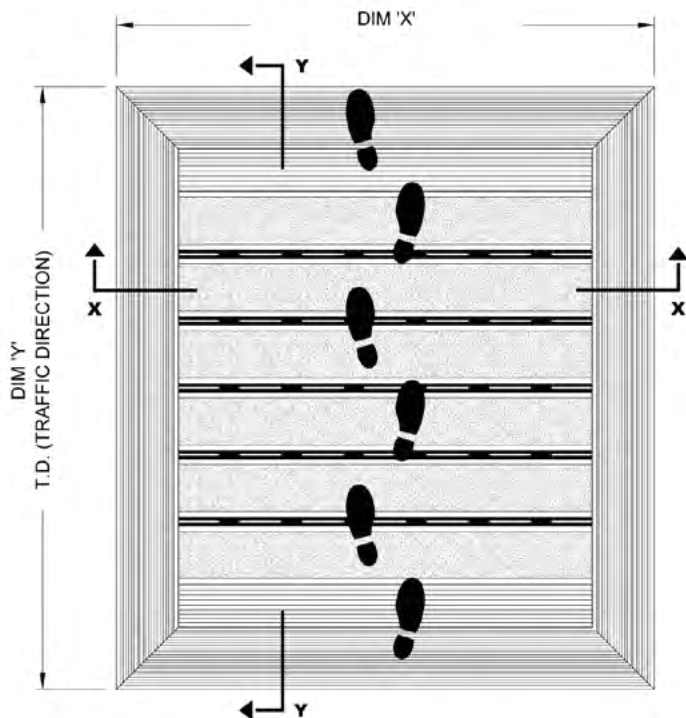

SPECIFICATIONS:
ALUMINUM ROLL-UP ENTRANCE GRATE WITH LDPE HINGES


- Rail Material:** 6063-T6 extruded aluminum alloy
- Frame Material:** 6063-T5 extruded aluminum alloy
- Tread Depth:** 1/2" (12.7 mm)
- Frame Width:** 2" (50.8 mm)
- Standard Finish:** Mill
- Tread Spacing:** 1-1/2" (38.1 mm) on center with 8 treads per foot in the direction of travel
- Spacing Between Rails:** Heelproof spacing of 5/32"
- Rolling Wheel Load Rating:** 750 lbs

- NOTES:
- Verify traffic direction - traffic to run perpendicular to rails.
 - Maximum single section size not to exceed 12'-0" (3.66m) in width (dim "x") or 100 sq. ft.
 - If multiple sections, verify sectioning does not occur in traffic path.
 - Vinyl filler on the ends of the traffic directions to be trimmed in field for tight fit.
 - Mat dimensions allow for clearance between mat section(s) and frame(s) in width (dim "x").
 - Additional product information including installation instructions may be found on our website.


Interpretation of fire and building codes may vary. Consult with the local authority having jurisdiction (AHJ) to determine appropriate standards.

ENTRANCE GRATE - ACTIV-GRATE™ — EG400 SERIES WITH EFSA4 SURFACE-MOUNTED ALUMINUM FRAME


ACTIV-GRATE 400 SERIES TREAD OPTIONS




EG400
Premium Carpet



EG401
Serrated Vinyl



EG402
Serrated Aluminum



EG405
Tuff Tread
Polypropylene Carpet

1 - SELECT GRATE OPTIONS
MADE-TO-ORDER ACTIV-GRATE™ EG400 SERIES WITH EFSA4 FRAME - EXAMPLE: EG400M-556509


MODEL OF GRATE	TREAD OPTIONS	RAIL FINISH	- (QTY)	WIDTH	TRAFFIC LENGTH	TREAD COLOR*	CUTOUTS
EG40 Roll up grating	0 Premium Carpet	M Mill				02 Carpet - Silvermine	N Notch Cut
EG41 Roll up grating with alternating tread	1 Vinyl	C Clear Anodized				03 Carpet - Walnut	A Angle Cut
	2 Serrated Aluminum	B Black Anodized				09 Carpet - Pepper	R Radius Cut
	5 Tuff Tread™	L Light Bronze Anodized				21 Vinyl - Black	C Column Cut
		D Medium Bronze Anodized				22 Vinyl - Gray	
		Z Dark Bronze Anodized				23 Vinyl - Brown	
						41 Tuff Tread - Ash	
						42 Tuff Tread - Coal	
						43 Tuff Tread - Mocha	
						Other - Specify below:	

2 - SELECT FRAME OPTIONS
MADE-TO-ORDER ACTIV-GRATE™ EG400 SERIES WITH EFSA4 FRAME

MODEL / FRAME TYPE	FRAME FINISH	- WIDTH	TRAFFIC LENGTH	CUTOUTS
EFSA4 Recessed Angle	M Mill	Size as indicated above	Cutouts as indicated above	
	C Clear Anodized			
	B Black Anodized			
	L Light Bronze Anodized			
	D Medium Bronze Anodized			
	Z Dark Bronze Anodized			

*See website for full list of tread colors

NOTE: All selections and options must be identical within the same submittal. Sizing may be different as entered in the width and traffic length columns. Please indicate quantity, which is NOT included in the part number. If other tread options, etc. are needed, then create a new submittal.

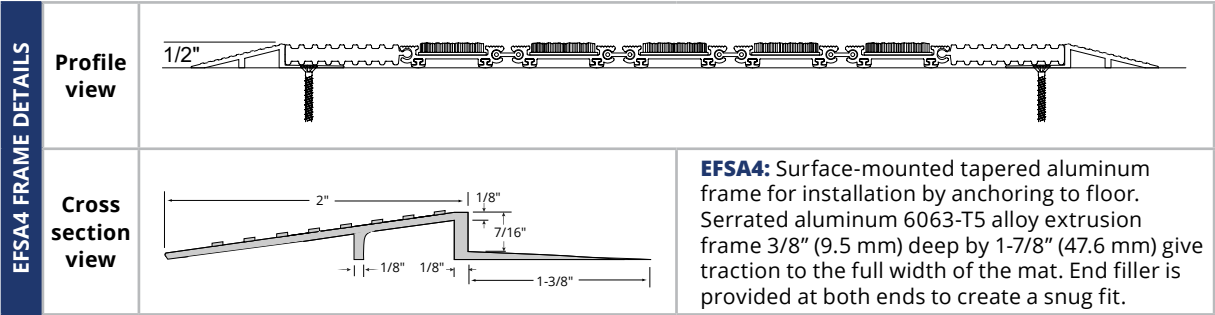

EFSA4 SURFACE-MOUNTED ALUMINUM FRAME DETAILS

Material: 6063-T5 and 6063-T6 extruded aluminum alloy tread rails and frames

Depth: 1/2" (12.7 mm)

Standard Finish: Mill

Tread Spacing: 1-1/2" (38.1 mm) on center with 8 treads per foot in the direction of travel

Spacing Between Rails: Heelproof spacing of 5/32"

Rolling Wheel Load Rating: 750 lbs

It is the responsibility of the customer to communicate specifications and product performance requirements that are needed for their application. This document is intended to convey potential product configurations and offerings. It is not to be used to imply or represent a specification or rating, of finished products shipped. Detailed, specific submittals can be created upon request. It is the responsibility of the customer to specify product accordingly to comply with local laws, codes, and ordinances.