
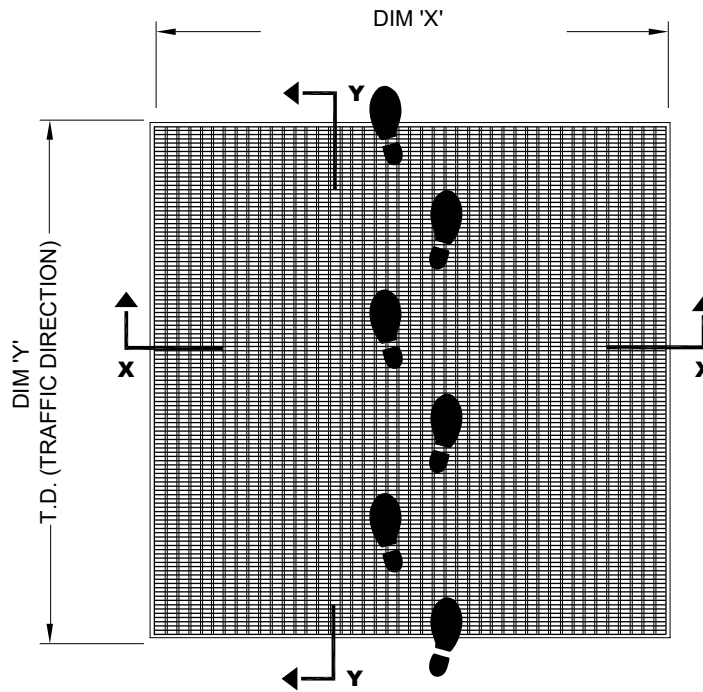


ENTRANCE GRILLE - Activ-Grille™ EG500 Series - Stainless Steel Entrance Grille

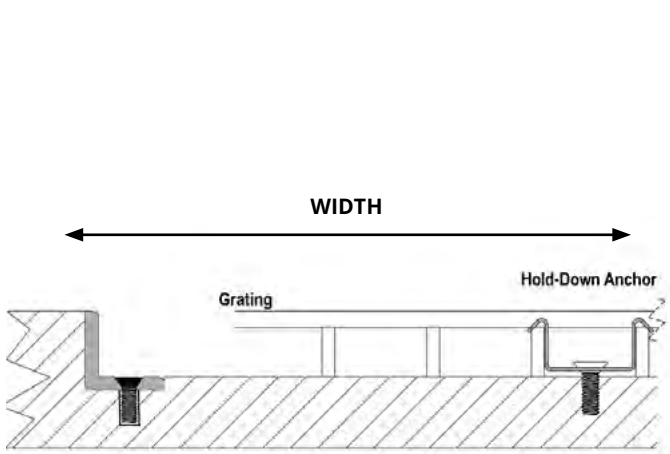

SPECIFICATIONS:

- Material:** Type 304 stainless steel.
- Depth:** 3/8" (9.5 mm), 5/8" (15.88 mm) or 1-1/8" (28.58 mm).
- Standard Finish:** #4 Satin.
- Tread Spacing:** 2" (50.8 mm) on center with 6 treads per foot in the direction of travel.
- Spacing Between Grille:** Heelproof spacing of .14" (3.6 mm)
- Rolling Wheel Load Rating:** 1000 lbs

Grille Sizes:

- EG503:** 3/8" (9.5 mm) profile (sections up to 7' 8" x 4' 0")
- EG508:** 5/8" (15.88 mm) profile (sections up to 7' 8" x 4' 0")
- EG509:** 1-1/8" (28.58 mm) profile (sections up to 8' 10" x 4' 0")

Multiple Sections Can be Combined to Make Sizes to Order

Frame Depths:

- EFRA53:** 1/2"
- EFRA58:** 3/4"
- EFRA59:** 1-1/4"

NOTE:





Verify Traffic Direction - traffic to run perpendicular to grille.

Additional product information including installation instructions may be found on our website.

OPTIONS: Drain Pan

QTY	LOCATION	DIMENSION "X" Width	DIMENSION "Y" Length	NOTES INCLUDING OPTIONAL FEATURES

It is the responsibility of the customer to communicate specifications and product performance requirements that are needed for their application. This document is intended to convey potential product configurations and offerings. It is not to be used to imply or represent a specification or rating, of finished products shipped. Detailed, specific submittals can be created upon request. It is the responsibility of the customer to specify product accordingly to comply with local laws, codes, and ordinances.

 <p>JL INDUSTRIES 9702 Newton Ave S. Bloomington, MN 55431 Many Locations Nationwide</p>	 800-554-6077	Distributor:		Project:
	 sales@activarcpg.com	Contractor:		Approved By:
	 www.activarcpg.com	Date:		Architect:
	Scale: N/A	Pages: 1 of 1	Item #:	