


ENTRANCE GRATE - ACTIV-GRATE™ — EG600 SERIES 3/4" ROLL-UP ENTRANCE GRATE WITH EFC6 RECESSED ALUMINUM ANGLE FRAME

The 600 Series grate is designed for heavy-duty, high-traffic areas with a 1000 lb wheel load rating. Recessed installation of this grating provides a smooth transition to the interior of your building. Deep recesses of 3/4" allow more moisture and building contaminants to collect below the walking surface. Contains LDPE hinges to cushion each tread rail that is quieter than aluminum hinges. Grate rolls up compactly for ease of cleaning. Drainage holes between tread rails allows moisture and dirt to fall below mat.

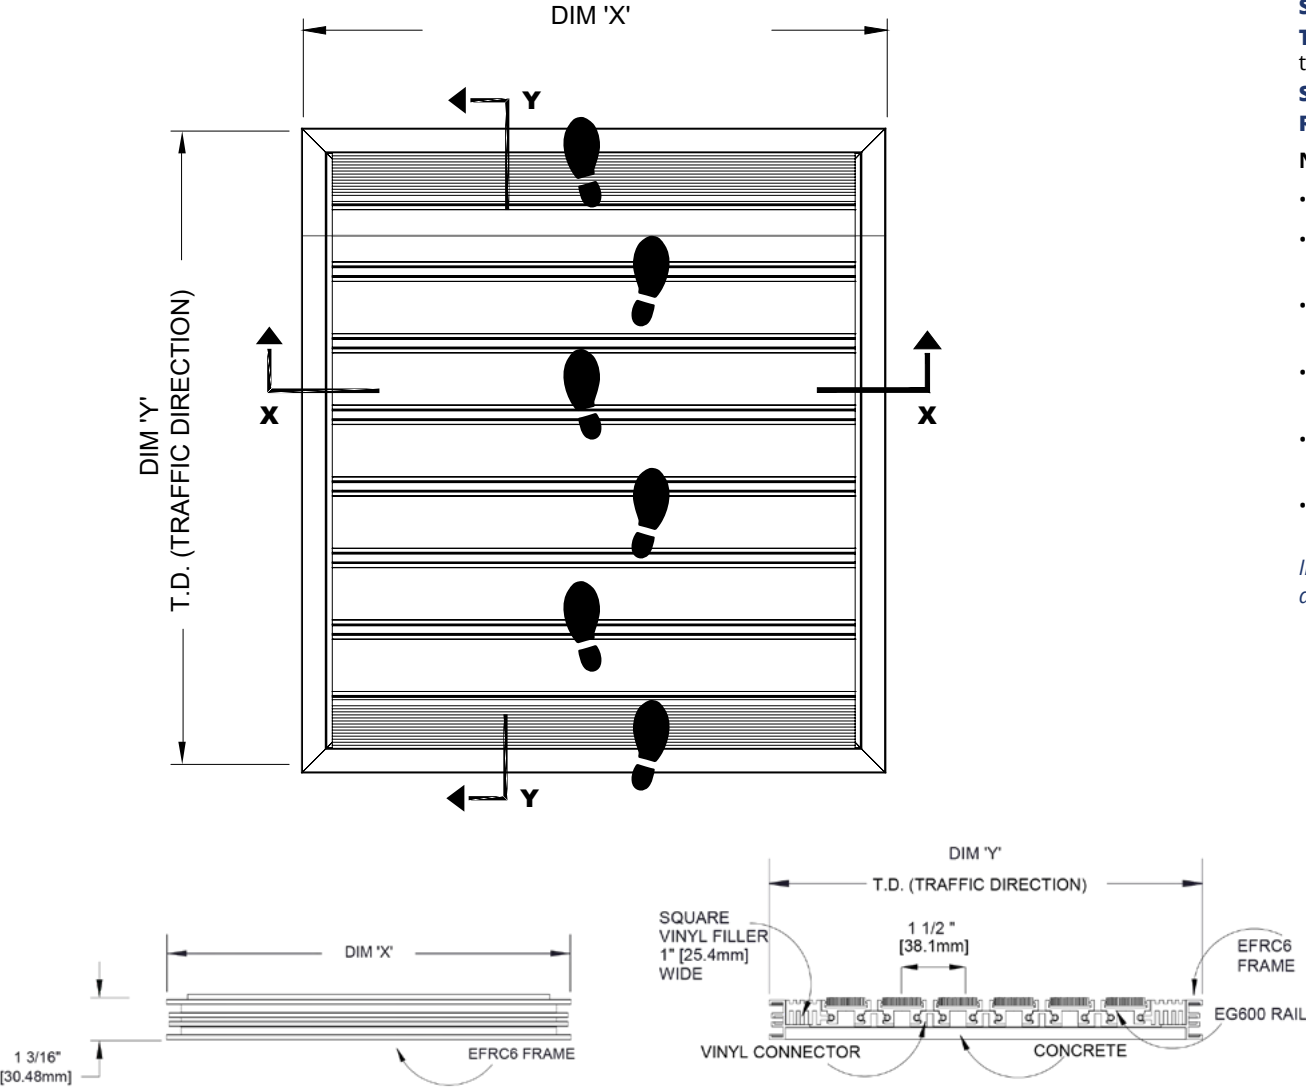

SPECIFICATIONS:  
ALUMINUM ROLL-UP ENTRANCE GRATE WITH LDPE HINGES


**Material:** 6063-T6 extruded aluminum alloy tread rails and frames  
**Tread Depth:** 3/4" (12.7 mm) or 11/16" (17.5 mm) depending on insert  
**Standard Finish:** Mill  
**Tread Spacing:** 1-1/2" (38.1 mm) on center with 8 treads per foot in the direction of travel  
**Spacing Between Rails:** 1/8" (3.2mm)  
**Rolling Wheel Load Rating:** 1000 lbs

- NOTES:**
- Verify traffic direction - traffic to run perpendicular to rails.
  - Maximum single section size not to exceed 12'-0" (3.66m) in width (dim "x") or 100 sq. ft.
  - If multiple sections, verify sectioning does not occur in traffic path.
  - Vinyl filler on the ends of the traffic directions to be trimmed in field for tight fit.
  - Mat dimensions allow for clearance between mat section(s) and frame(s) in width (dim "x").
  - Additional product information including installation instructions may be found on our website.


*Interpretation of fire and building codes may vary. Consult with the local authority having jurisdiction (AHJ) to determine appropriate standards.*

ENTRANCE GRATE - ACTIV-GRATE™ — EG600 SERIES 3/4" ROLL-UP ENTRANCE GRATE WITH EFRC6 CAST-IN-PLACE RECESSED FRAME


ACTIV-GRATE 600 SERIES TREAD OPTIONS




EG600  
Premium Carpet



EG601  
Serrated Vinyl



EG602  
Serrated Aluminum



EG605  
Tuff Tread  
Polypropylene Carpet

1 - SELECT GRATE OPTIONS  
MADE-TO-ORDER ACTIV-GRATE™ EG600 SERIES WITH EFRC6 FRAME - EXAMPLE: EG400M-556509

MODEL OF GRATE		TREAD OPTIONS	RAIL FINISH	- (QTY)	WIDTH	TRAFFIC LENGTH	TREAD COLOR*	CUTOUTS
EG60	Roll up grating	0 Premium Carpet	M Mill				02 Carpet - Silvermine	N Notch Cut
		1 Vinyl	C Clear Anodized				03 Carpet - Walnut	A Angle Cut
		2 Serrated Aluminum	B Black Anodized				09 Carpet - Pepper	R Radius Cut
		5 Tuff Tread™	L Light Bronze Anodized				21 Vinyl - Black	C Column Cut
EG61	Roll up grating with alternating tread		D Medium Bronze Anodized				22 Vinyl - Gray	
			Z Dark Bronze Anodized				23 Vinyl - Brown	
							41 Tuff Tread - Ash	
							42 Tuff Tread - Coal	
							43 Tuff Tread - Mocha	
							Other - Specify below:	

2 - SELECT FRAME OPTIONS  
MADE-TO-ORDER ACTIV-GRATE™ EG600 SERIES WITH EFRC6 FRAME

MODEL / FRAME TYPE	FRAME FINISH	-	WIDTH	TRAFFIC LENGTH	CUTOUTS
EFRC6 Cast-in-place Recessed Level Bed	M Mill		Size as indicated above		Cutouts as indicated above
	C Clear Anodized				
	B Black Anodized				
	L Light Bronze Anodized				
	D Medium Bronze Anodized				
	Z Dark Bronze Anodized				

\*See website for full list of tread colors

NOTE: All selections and options must be identical within the same submittal. Sizing may be different as entered in the width and traffic length columns. Please indicate quantity, which is NOT included in the part number. If other tread options, etc. are needed, then create a new submittal.

EFRC6 FRAME DETAILS	Profile view	
	Cross section view	<p>EFRC6: Cast-in-place recessed level-bed frame with mitered corners that connect quickly with corner keys. 1-3/8" (34.9mm) frame has 3/4" (19. mm) recess for tread rail and 1/2" (12.7 mm) wide profile. End filler is provided at both ends to create a snug fit.</p>

EFRC6 RECESSED TAPERED FRAME DETAILS

- Material:** 6063-T6 extruded aluminum alloy tread rails and frames
- Depth:** 3/4" (12.7 mm) or 11/16" (17.5 mm) depending on insert
- Standard Finish:** Mill
- Tread Spacing:** 1-1/2" (38.1 mm) on center with 8 treads per foot in the direction of travel
- Spacing Between Rails:** 5/32" (3.9 mm)
- Rolling Wheel Load Rating:** 1000 lbs