

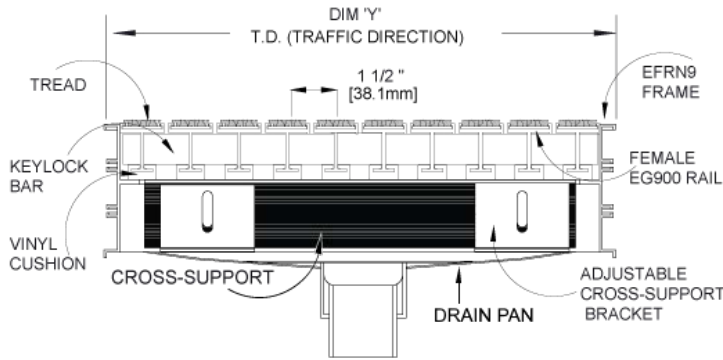
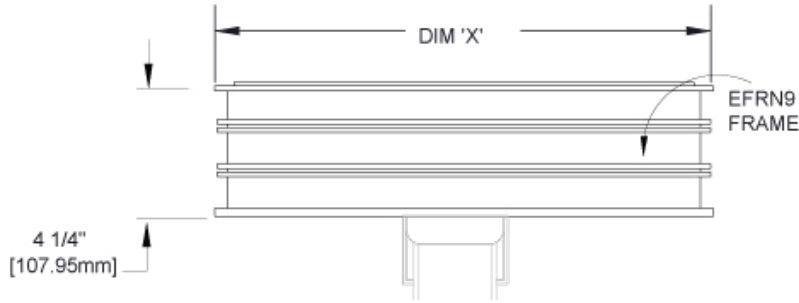


ENTRANCE GRATE - Activ-Grate™ EG900 Series with EFRN9 Frame - Aluminum Grate with Deep Pit Frame & Drain Pan

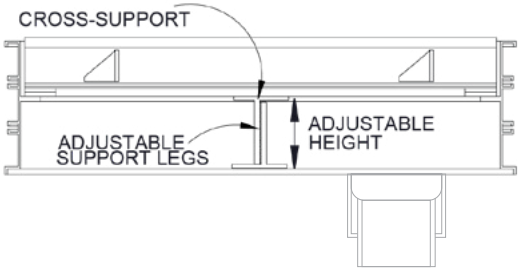

ACTIV-GRATE 900 SERIES INSERTS

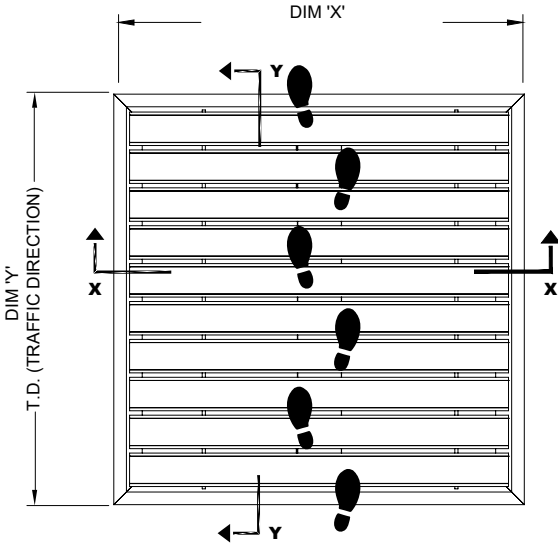

SPECIFICATIONS:

Rigid Aluminium Entrance Grate

Rail Material: 6063-T6 extruded aluminum alloy.

Frame Material: 6063-T5 extruded aluminum alloy.

Depth: 4-1/4" (107.95 mm)

Frame Width: 1/2" (12.7mm)

Standard Finish: Mill.

Drain Pan: Aluminum with mill finish, drain port and plumbing by others.

Tread Spacing: 1-1/2" (38.1 mm) on center with 6 treads per foot in the direction of travel.

Spacing Between Rails: Heelproof spacing of 1/8".

Rolling Wheel Load Rating: 400 lbs

NOTE:

Verify traffic direction - traffic to run perpendicular to rails.

Maximum single section size not to exceed 12'-0" (3.66m) in width (dim "x") or 36 sq. ft.

If multiple sections, verify sectioning does not occur in traffic path.

Spacer bar will be added if inside frame dimension of length (dim "y") is not divisible by 1.5".

Mat dimensions allow for clearance between mat section(s) and frame(s) in width (dim "x").

Additional product information including installation instructions may be found at

[www.activarcpg.com](http://www.activarcpg.com)

QTY	LOCATION	DIMENSION "X" Width	DIMENSION "Y" Length	FINISH	TREAD OPTIONS	TREAD COLOR	NOTES



9702 Newton Ave S. Bloomington, MN 55431 |

800-554-6077  
sales@activarcpg.com  
www.activarcpg.com

Distributor:		Project:
Contractor:		Approved By:
Date:		Architect:
Scale: N/A	Pages: 1 of 1	Item #: