
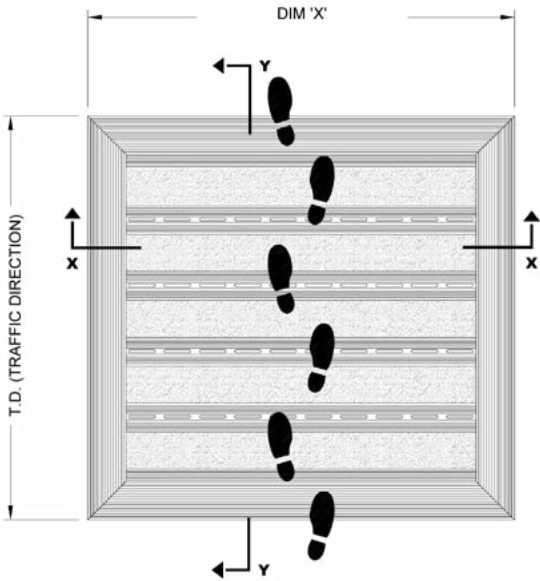
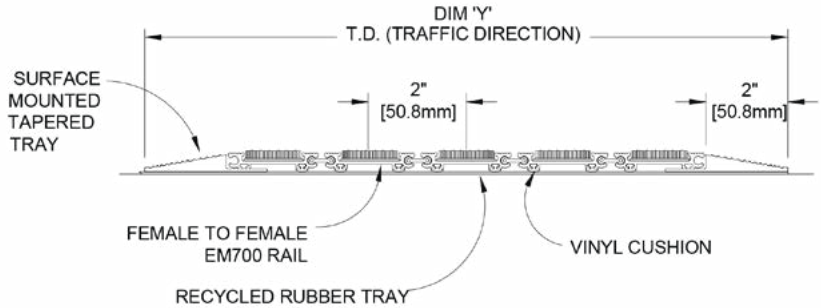



ENTRANCE MAT - Activ-Mat™ EM700 Series with EFST7 Frame - Aluminum Mat with Surface Mount Vinyl Frame & Rubber Tray **SPECIFICATIONS:**

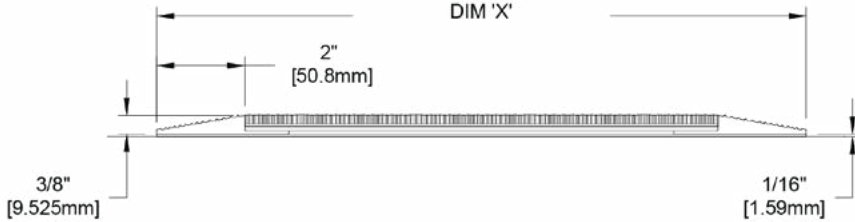

Aluminium Roll-Up Entrance Mat with LDPE Hinges

- Rail Material:** 6063-T6 extruded aluminum alloy.
- Frame Material:** Vinyl tapered frame with integral recycled rubber tray.
- Depth:** 3/8" (9.5 mm).
- Frame Width:** 2" (50.8mm)
- Standard Finish:** Mill.
- Tread Spacing:** 2" (50.8mm) on center with 6 treads per foot in the direction of travel.
- Spacing Between Rails:** Heelproof spacing of 3/16".
- Rolling Wheel Load Rating:** 350 lbs

NOTE:
Verify traffic direction - traffic to run perpendicular to rails.
Maximum single section size not to exceed 12'-0" (3.66m) in width (dim "x") or 100 sq. ft.
If multiple sections, verify sectioning does not occur in traffic path.
Mat dimensions allow for clearance between mat section(s) and frame(s) in width (dim "x").
Additional product information including installation instructions may be found on our website.



QTY	LOCATION	DIMENSION "X" Width	DIMENSION "Y" Length	FINISH	TREAD OPTIONS	TREAD COLOR	NOTES



JL INDUSTRIES
9702 Newton Ave S. Bloomington, MN 55431 | Many Locations Nationwide

 800-554-6077

 sales@activarcpvg.com

 www.activarcpvg.com

Distributor:

Contractor:

Date:

Scale: N/A

Project:

Approved By:

Architect:

Pages: 1 of 1

Item #:

© 2025 Activar Construction Products Group, Inc.

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF ACTIVAR CONSTRUCTION PRODUCTS GROUP, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF ACTIVAR CONSTRUCTION PRODUCTS GROUP, INC. IS PROHIBITED.

2/14/2025