
FIRE PROTECTION CABINET - SPECIALTY: SCHOOL FIRE-FX™ SERIES - Stainless Steel

As a leader in the industry, JL Industries offers heavy duty, durable school cabinets for fire extinguishers where rough duty applications apply. Available with a wide variety of options and accessories, this cabinet will meet your project needs.

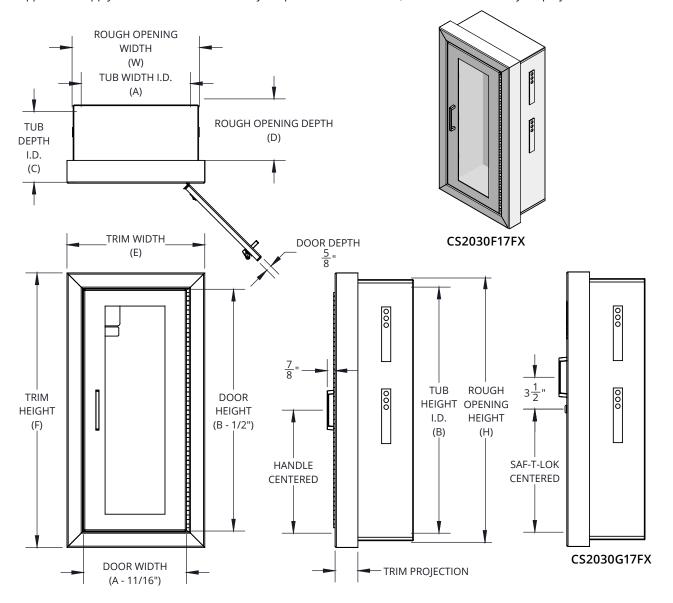

SPECIFICATIONS:

Tub Material & Finish: 14 gauge #4 stainless steel **Trim Material & Finish:** 14 gauge #4 stainless steel **Door Material & Finish:** 14 gauge #4 stainless steel

Glazing: 1/8" clear tempered

Insulation: An inner tub of the same material and finish as the

frame surrounded by fire-resistant material

Hinge: Heave duty continuous hinge, zinc-plated steel, opens to

180

Hardware: Zinc plated pull handle with roller catch or cylinder

Saf-T-Lok™

ADA Compliance: Cabinet cannot protrude more than 4" and the handle cannot be mounted more than 48" above finished floor. Surface-mount does not comply with ADA.

FIRE-RATINGS:

Intertek listed and labeled as an approved membrane penetration firestop system for up to 2 hours in accordance with ASTM-E814 when properly installed in a wall assembly according to installation instructions. The installation of this fire-rated cabinet which lacks a cabinet door or a condition in which the door is left ajar, will void the fire rating.

OPTIONS:

Door: Full, vertical duo, solid, horizontal

Glazing: .090" clear acrylic, 1/4" clear wire glass, 1/8" bronze acrylic, 1/8" gray acrylic, 1/4" clear laminated safety glass

Handles: Recessed handle

Alarms: Commander alarm, Brigadier alarm, Strobe alarm


Finish: Red, black, other powder coat colors **Lettering:** Silkscreen, engraving, etching

ADDITIONAL ACCESSORIES (sold separately)

Die cuts, decals, plastic signs

See supplemental submittals for more information on various options and accessories.

Interpretation of fire and building codes may vary. Consult with the local authority having jurisdiction (AHJ) to determine appropriate standards.





FIRE PROTECTION CABINET - SPECIALTY: SCHOOL FIRE-FX™ SERIES - Stainless Steel

QTY	MODEL & TRIM		ADA	TUB I. D.		TRIM O. D. WALL		WALL R	WALL ROUGH OPENING*		WT	COMPATIBLE	
VII	MODEL	TRIM PROJECTION	≤4"	WIDTH (A)	HEIGHT (B)	DEPTH C)	WIDTH (E)	HEIGHT (F)	WIDTH (W)	HEIGHT H)	DEPTH (D)	LBS	FIRE EXTINGUISHERS
	CS2035	1/8" flat square	✓	12"	27"	7-¾"	15"	30"	14"	29"	8-¾"	54	Any Cosmic, Galaxy,
	CS2037	2-½" square	✓	12"	27"	7-¾"	15"	30"	14"	29"	6-1/2"	56	Mercury, Saturn & Grenadier P, Sentinel 5-10

Fire-rated specific wall opening

	SOLID	FULL VIEW	VERTICAL DUO	HORIZONTAL DUO
	S21	F	V	D
STANDARD PULL				
	L22	G	W	E
STANDARD PULL & SAF-T-LOK				
	L24			
NO HANDLE & SAF-T-LOK				


DOOR/LATCH STYLE **GLAZING/DOOR TYPE MODEL** DESCRIPTION **MODEL** DESCRIPTION F Full view 10 .09" Clear acrylic Full view w/ Saf-T-Lok™ G 13 1/4" Clear wired glass D Horizontal duo 15 1/8" Bronze acrylic Ε Horizontal duo w/ Saf-T-Lok™ 16 1/8" Gray acrylic V Vertical duo 17 1/8" Clear tempered glass Vertical duo w/ Saf-T-Lok™ 18 1/4" Clear safety glass В Small view window w/ Saf-T-Lok™ 21 No glazing, no lock w/ pull (S21 only) S 22 No glazing, Saf-T-Lok™ w/ pull (L22 only) Solid w/ Saf-T-Lok™ 24 No glazing, Saf-T-Lok™ and no pull (L24 only)

(ins	stalled at an additional cost)	(installed at an additional cost)			
MODEL	EL DESCRIPTION		MODEL	DESCRIPTION	
Α	Recessed handle		CA	Commander	
LH	LH Lever handle (not avail. with Saf-T-Lok™)		ВА	Brigadier	
МС	Magnetic latch (replaces roller catch)		SA	Strobe	

CUSTOM LETTERING OPTIONS (when manufactured at additional cost)

OPTIONS HANDLE/LATCH

	(Wilch manaractarea at additional cost)					
	MODEL	DESCRIPTION				
	SS	Silkscreen				
	ET	Etching on glass				
	EN	Engraving on metal				
LETTERING - OTHER (please specify)						
	Other					

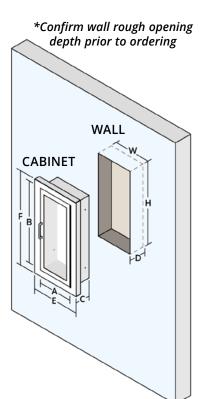

TRIM STYLE & PROJECTION					
RECESSED	SEMI- RECESSED				
5	0				
3/8" Flat Square	2-½" Square				

HANDLE/LATCH OPTIONS (sold separately)

		oo (50.a 50pa.a.o.,)			
QTY	MODEL	DESCRIPTION			
PUF		Futura "FIRE" Mill			
1 4 1 1 1		Futura "FIRE" Red			
		Futura "FIRE" White			
		Chrome pull handle			

PLASTIC SIGNS (sold separately)

· · · · · · · · · · · · · · · · · ·						
QTY	MODEL	DESCRIPTION				
	225	FE, 3D ANGLE, 4" x 12"				
	235	FE, 3D TENT, 4" x 18"				
	245	FE, 3D TENT, 5" x 6"				
	25S	FE, FLUSH, 4" x 12"				

LETTERING (sold separately)

ALARM OPTIONS

QTY	MODEL	FIRE EXTINGUISHER" DESCRIPTION
	LDCVRFE	DIE CUT, VERT, RED, 3/4" x 18"
	LDCVBFE	DIE CUT, VERT, BLACK, 3/4" x 18"
	LDVRFE	DECAL, VERT, RED, 3/4" x 18"
	LDCVRFE-ESM-A	DIE CUT, VERT, RED, (fits 81 tub), 3/4" x 14"
	LDCHRFE-2	DIE CUT, HORZ, RED, 2" HIGH, 4-½" x 21"
	Other	

It is the responsibility of the customer to communicate specifications and product performance requirements that are needed for their application. This document is intended to convey potential product configurations and offerings. It is not to be used to imply or represent a specification or rating of finished products shipped. Detailed, specific submittals can be created upon request. It is the responsibility of the customer to specify product accordingly to comply with local laws, codes, and ordinances.