
## FIRE PROTECTION CABINET - SPECIALTY: SECURITY SERIES FIRE-FX™ SERIES - Stainless Steel

As a leader in the industry, JL Industries offers security and detention cabinets for fire extinguishers, fire hoses or fire department valves to meet security requirements. Available with a wide variety of lock options, this cabinet will meet your project needs.

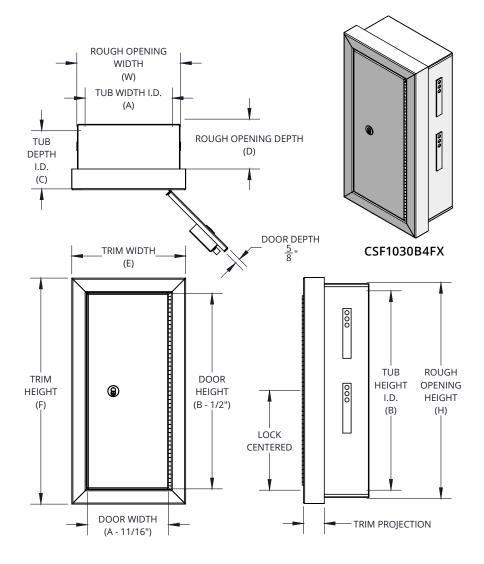

## SPECIFICATIONS:

**Tub Material:** 14 gauge stainless steel with masonry anchors **Trim Material:** 14 gauge stainless steel, full recessed 1/8" square flat, semi-recessed 2-½" square trim, surface mount square trim

Door Material & Style: 20 gauge cold rolled steel; solid door with security prep or lock installed

**Insulation:** Foil-faced mineral wool

Hinge: Continuous hinge, 12 gauge cold rolled steel, powder

coat white, opens to 135° **Lock:** Lock option, see page 3

**Insulation:** An inner tub of the same material and finish as the

frame surrounded by fire-resistant material

Finish: #4 stainless steel

**ADA Compliance:** Cabinet cannot protrude more than 4" and the handle cannot be mounted more than 48" above finished floor. Surface-mount does not comply with ADA.

## FIRE-RATINGS:

Fire Rating: Intertek Warnock Hersey listed and labeled up to 2 hours in accordance with ASME E814 and CAN/ULC-S115

## **OPTIONS:**

Lock Preps: Mortise cam, mortise deadbolt, detention deadbolt, detention deadbolt Mogul, detention slam, detention slam Mogul

**Finish:** Red, black, other powder coat colors


**Lettering:** Silkscreen, engraving

## ADDITIONAL ACCESSORIES (sold separately)

Die cuts, decals, plastic signs

See supplemental submittals for more information on various options and accessories.

Interpretation of fire and building codes may vary. Consult with the local authority having jurisdiction (AHJ) to determine appropriate standards.






## FIRE PROTECTION CABINET - SPECIALTY: SECURITY SERIES FIRE-FX™ SERIES - Stainless Steel

| QTY | MODEL & TRIM              |                                   | ADA | TUB I. D.    |               | TRIM O. D.   |              | WALL ROUGH<br>OPENING* |              | wt            | COMPATIBLE<br>FIRE |     |   |
|-----|---------------------------|-----------------------------------|-----|--------------|---------------|--------------|--------------|------------------------|--------------|---------------|--------------------|-----|---|
| Ì   | MODEL                     | TRIM PROJECTION                   | ≤4" | WIDTH<br>(A) | HEIGHT<br>(B) | DEPTH<br>(C) | WIDTH<br>(E) | HEIGHT<br>(F)          | WIDTH<br>(W) | HEIGHT<br>(H) | DEPTH<br>(D)       | LBS | EXTINGUISHERS   |
|     | FIRE EXTINGUISHER CABINET |                                   |     |              |               |              |              |                        |              |               |                    |     |   |
|     | CSF1035                   | full recessed<br>1/8" flat square | ~   | 10-1/2"      | 24"           | 7"           | 13-½"        | 27"                    | 12-1/2"      | 26-1/2"       | 8"                 | 41  | Cosmic,<br>Galaxy 2.5 - 10 lb                                 |
|     | CSF1030                   | semi-recessed<br>2-½" square      | ✓   | 10-1/2"      | 24"           | 7"           | 13-½"        | 27"                    | 12-½"        | 26-1/2"       | 5-1/2"             | 45  | Mercury 2.5 - 5 lb,<br>Sentinel 5 lb                          |
|     | CSF2035                   | full recessed<br>1/8" flat square | ✓   | 12"          | 27"           | 8-1/2"       | 15"          | 30"                    | 14"          | 29-1/2"       | 10"                | 54  | Any Cosmic/Galaxy,<br>Mercury,<br>Saturn 15,<br>Sentinel 5 lb |
|     | CSF2030                   | semi-recessed<br>2-½" square      | ~   | 12"          | 27"           | 8-1/2"       | 15"          | 30"                    | 14"          | 29-1/2"       | 7-1/2"             | 56  |   |
|     | VALVE CABINET             |                                   |     |              |               |              |              |                        |              |               |                    |     |   |
|     | CSF8535                   | full recessed<br>1/8" flat square | ~   | 18"          | 18"           | 8-1/2"       | 21"          | 21"                    | 20"          | 20-1/2"       | 9-1/2"             | 53  | 1-½" or 2-½"  |
|     | CSF8530                   | semi-recessed<br>2-½" square      | ✓   | 18"          | 18"           | 8-1⁄2"       | 21"          | 21"                    | 20"          | 20-½"         | 7"                 | 54  | Fire Department<br>Valve                                      |
|     | HOSE CABINET              |                                   |     |              |               |              |              |                        |              |               |                    |     |   |
|     | CSF6535                   | full recessed<br>1/8" flat square | ~   | 32-¾"        | 34-¾"         | 8"           | 35-¾"        | 37-¾"                  | 34-¾"        | 36-¾"         | 9"                 | 132 | 1-½" or 2-½"<br>Fire Department                               |
|     | CSF6530                   | semi-recessed<br>2-½" square      | ✓   | 32-¾"        | 34-¾"         | 8"           | 35-¾"        | 37-¾"                  | 34-¾"        | 36-¾"         | 6-1⁄2"             | 157 | Valve,<br>100' hose rack unit                                 |

Fire-rated specific wall opening

# \*Confirm wall rough opening depth prior to ordering

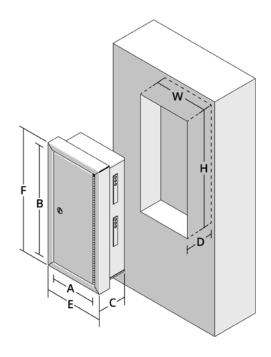

| TRIM STYLE & PROJECTION  RECESSED SEMI- RECESSED |                |  |  |
|--|----------------|--|--|
| 5  | 0              |  |  |
|  |                |  |  |
|  | L              |  |  |
| 3/8"<br>Flat Square                              | 2-½"<br>Square |  |  |

### LETTERING OPTIONS

| LETTERING OPTIONS  |       |                 |  |  |  |  |
|--|-------|-----------------|--|--|--|--|
| QTY  | MODEL | DEL DESCRIPTION |  |  |  |  |
|  | SS    | Silkscreen      |  |  |  |  |
|  | EN    | Engraving       |  |  |  |  |
| LETTERING - OTHER (please specify) Refer to supplemental submittal |       |                 |  |  |  |  |
|  | Other |                 |  |  |  |  |


## PLASTIC SIGNS (sold separately)

| TEASTIC SIGNS (Sold Separately) |       |                        |  |  |  |
|---------------------------------|-------|------------------------|--|--|--|
| QTY                             | MODEL | DESCRIPTION            |  |  |  |
|                                 | 225   | FE, 3D ANGLE, 4" x 12" |  |  |  |
|                                 | 235   | FE, 3D TENT, 4" x 18"  |  |  |  |
|                                 | 245   | FE, 3D TENT, 5" x 6"   |  |  |  |
|                                 | 25S   | FE, FLUSH, 4" x 12"    |  |  |  |

## LETTERING (sold separately)

| ZZI IZIMITO (Sola Separacely) |               |   |  |  |  |  |
|-------------------------------|---------------|---|--|--|--|--|
| QTY                           | MODEL         | "FIRE EXTINGUISHER" DESCRIPTION               |  |  |  |  |
|                               | LDCVRFE       | DIE CUT, VERT, RED, 3/4" x 18"                |  |  |  |  |
|                               | LDCVBFE       | DIE CUT, VERT, BLACK, 3/4" x 18"              |  |  |  |  |
|                               | LDVRFE        | DECAL, VERT, RED, 3/4" x 18"                  |  |  |  |  |
|                               | LDCVRFE-ESM-A | DIE CUT, VERT, RED, (fits 81 tub), 3/4" x 14" |  |  |  |  |
|                               | LDCHRFE-2     | DIE CUT, HORZ, RED, 2" HIGH, 4-½" x 21"       |  |  |  |  |
|                               | Other         |   |  |  |  |  |



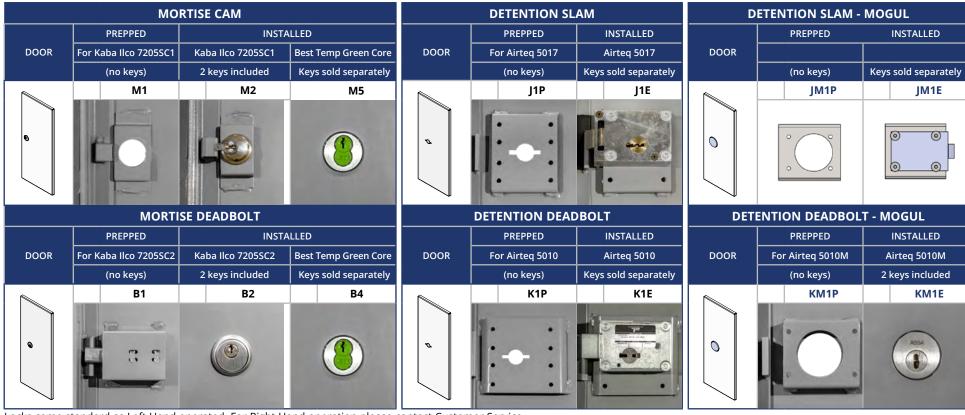

Locks come standard as Left Hand operated. For Right Hand operation please contact Customer Service.

## **LOCK PARTS - SOLD SEPARATELY**

| QTY | LOCK TYPE            | MODEL     | DESCRIPTION  |  |  |  |  |
|-----|----------------------|-----------|--|--|--|--|--|
|     | MORTISE CAM/DEADBOLT |           |  |  |  |  |  |
|     | 06431                |           | Kaba Ilco 7205SC1, 1-1/4" Dia x 1-1/4" long mortise cylinder with standard cam   |  |  |  |  |
|     | М2                   | 06431-KEY | Key for 06431  |  |  |  |  |
|     | M2/M5                | 0646      | Lock nut ring (req. for cylinders if supplied by others)   |  |  |  |  |
|     | M5 08356             |           | Best 1E74C4RP3626, 1-1/4" long mortise cylinder with C4 cam  |  |  |  |  |
|     | B2                   | 06441     | Kaba Ilco 7205SC2, 1-%" Dia x 1-%" long mortise cylinder with Adams Rite cam   |  |  |  |  |
|     |                      | 06441-KEY | Key for 06441  |  |  |  |  |
|     | В4                   | SL-1E74   | Temporary green construction core, Best 1E74C181RP3626, 1-%" diameter x 1-%" long mortise cylinder with C181 Adam Rite cam |  |  |  |  |
|     | M5/B4                | 040004    | Key, Operation   |  |  |  |  |
|     |                      | 040005    | Key, Control to remove core  |  |  |  |  |
|     | Other                | Specify:  |  |  |  |  |  |

| QTY | LOCK TYPE          | MODEL     | DESCRIPTION  |  |  |  |  |
|-----|--------------------|-----------|--|--|--|--|--|
|     | DETENTION SLAM     |           |  |  |  |  |  |
|     |                    |           | Airteq 5017 medium security, latchbolt 1" x 7/16" bolt throw             |  |  |  |  |
|     | J1E                | DDK-5017  | Key for DDI-5017 (sold separately)                                       |  |  |  |  |
|     | 18445              | DDI-5017M | Airteq 5017M, Mogul, medium security, stainless steel 1" x 7/16" bolt    |  |  |  |  |
|     | JM1E               | DDK-5017M | Keys for DDI-5017M   |  |  |  |  |
|     | DETENTION DEADBOLT |           |  |  |  |  |  |
|     | K1E                | DDI-5010  | Airteq 5010, zinc plated steel bolt 1-1/2" x 3/4" and 5/8" bolt throw    |  |  |  |  |
|     | NIE                | DDK-5010  | Key for DDI-5010 (sold separately)                                       |  |  |  |  |
|     | KM1E               | DDI-5010M | Airteq 5010M, Mogul zinc plated steel bolt 1- 1/2" x 1/2" and 5/8" throw |  |  |  |  |
|     |                    | DDK-5010M | Keys for DDI-5010M   |  |  |  |  |
|     | Other              | Specify:  |  |  |  |  |  |

DECCRIPTION