
### FIRE PROTECTION CABINET - SPECIALTY: SECURITY SERIES FIRE-FX™ SERIES - Steel

As a leader in the industry, JL Industries offers security and detention cabinets for fire extinguishers, fire hoses or fire department valves to meet security requirements. Available with a wide variety of lock options, this cabinet will meet your project needs.

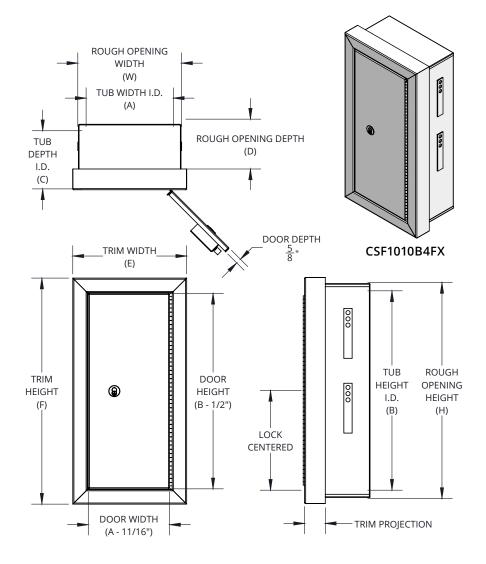

### SPECIFICATIONS:

**Tub Material:** 12 gauge cold rolled steel (CRS) with masonry anchors Trim Material: 12 gauge cold rolled steel (CRS), full recessed 1/8" square flat, semi-recessed 2-1/2" square trim, surface mount square trim

Door Material & Style: 20 gauge cold rolled steel; solid door with security prep or lock installed

**Insulation:** Foil-faced mineral wool

Hinge: Continuous hinge, 12 gauge cold rolled steel, powder

coat white, opens to 135° **Lock:** Lock option, see page 3

**Insulation:** An inner tub of the same material and finish as the

frame surrounded by fire-resistant material

Finish: White powder coat

**ADA Compliance:** Cabinet cannot protrude more than 4" and the handle cannot be mounted more than 48" above finished floor. Surface-mount does not comply with ADA.

### FIRE-RATINGS:

Fire Rating: Intertek Warnock Hersey listed and labeled up to 2 hours in accordance with ASME E814 and CAN/ULC-S115

### **OPTIONS:**

Lock Preps: Mortise cam, mortise deadbolt, detention deadbolt, detention deadbolt Mogul, detention slam, detention slam Mogul

**Finish:** Red, black, other powder coat colors


Lettering: Silkscreen, engraving

### ADDITIONAL ACCESSORIES (sold separately)

Die cuts, decals, plastic signs

See supplemental submittals for more information on various options and accessories.

Interpretation of fire and building codes may vary. Consult with the local authority having jurisdiction (AHJ) to determine appropriate standards.






## FIRE PROTECTION CABINET - SPECIALTY: SECURITY SERIES FIRE-FX™ SERIES - Steel

QTY	MODEL & TRIM		ADA	TUB I. D.		TRIM O. D.		WALL ROUGH OPENING*		wt	COMPATIBLE FIRE		
Ì	MODEL	TRIM PROJECTION	≤4"	WIDTH (A)	HEIGHT (B)	DEPTH (C)	WIDTH (E)	HEIGHT (F)	WIDTH (W)	HEIGHT (H)	DEPTH (D)	LBS	EXTINGUISHERS
	FIRE EXTINGUISHER CABINET												
	CSF1015	full recessed 1/8" flat square	~	10-½"	24"	7"	13-½"	27"	12-1/2"	26-1/2"	8"	41	Cosmic, Galaxy 2.5 - 10 lb
	CSF1010	semi-recessed 2-½" square	✓	10-½"	24"	7"	13-½"	27"	12-½"	26-1/2"	5-1/2"	45	Mercury 2.5 - 5 lb, Sentinel 5 lb
	CSF2015	full recessed 1/8" flat square	✓	12"	27"	8-1/2"	15"	30"	14"	29-1/2"	10"	54	Any Cosmic/Galaxy, Mercury,
	CSF2010	semi-recessed 2-½" square	~	12"	27"	8-1/2"	15"	30"	14"	29-1/2"	7-1/2"	56	Saturn 15, Sentinel 5 lb
	VALVE CABINET												
	CSF8515	full recessed 1/8" flat square	~	18"	18"	8-1/2"	21"	21"	20"	20-1/2"	9-1/2"	53	1-½" or 2-½" Fire Department
	CSF8510	semi-recessed 2-½" square	✓	18"	18"	8-1⁄2"	21"	21"	20"	20-½"	7"	54	Valve
	HOSE CABINET												
	CSF6515	full recessed 1/8" flat square	~	32-¾"	34-¾"	8"	35-¾"	37-¾"	34-¾"	36-¾"	9"	132	1-½" or 2-½" Fire Department
	CSF6510	semi-recessed 2-½" square	✓	32-¾"	34-¾"	8"	35-¾"	37-¾"	34-¾"	36-¾"	6-1⁄2"	157	Valve, 100' hose rack unit

Fire-rated specific wall opening

# \*Confirm wall rough opening depth prior to ordering

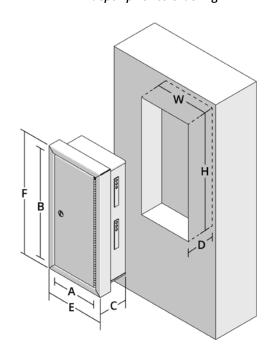

TRIM STYLE & PROJECTION  RECESSED  RECESSED					
5	0				
	LJ				
3/8" Flat Square	2-½" Square				

### FINISH OPTIONS LETTERING OPTIONS

		1311 01 110143	ELITERING OF HORS				
QTY	MODEL	DESCRIPTION	QTY	MODEL	DESCRIPTION		
	(none)	White (Std.)		SS	Silkscreen		
	ВК	Black		EN	Engraving		
	R	Red	<b>LETTERING - OTHER (please</b> Refer to supplemental subm		IG - OTHER (please specify) to supplemental submittal		
	COLOR - OTHER (please specify) Refer to supplemental submittal			Other			
Doo	Door/Trim/						
-	Tub						

Must be same finish color for door, trim, tub


### PLASTIC SIGNS (sold separately)

QTY   MODEL		DESCRIPTION				
	225	FE, 3D ANGLE, 4" x 12"				
	235	FE, 3D TENT, 4" x 18"				
	245	FE, 3D TENT, 5" x 6"				
	25S	FE, FLUSH, 4" x 12"				

### LETTERING (sold separately)

QTY	MODEL	"FIRE EXTINGUISHER" DESCRIPTION
	LDCVRFE	DIE CUT, VERT, RED, 3/4" x 18"
	LDCVBFE	DIE CUT, VERT, BLACK, 3/4" x 18"
	LDVRFE	DECAL, VERT, RED, 3/4" x 18"
	LDCVRFE-ESM-A	DIE CUT, VERT, RED, (fits 81 tub), 3/4" x 14"
	LDCHRFE-2	DIE CUT, HORZ, RED, 2" HIGH, 4-1/2" x 21"
	Other	



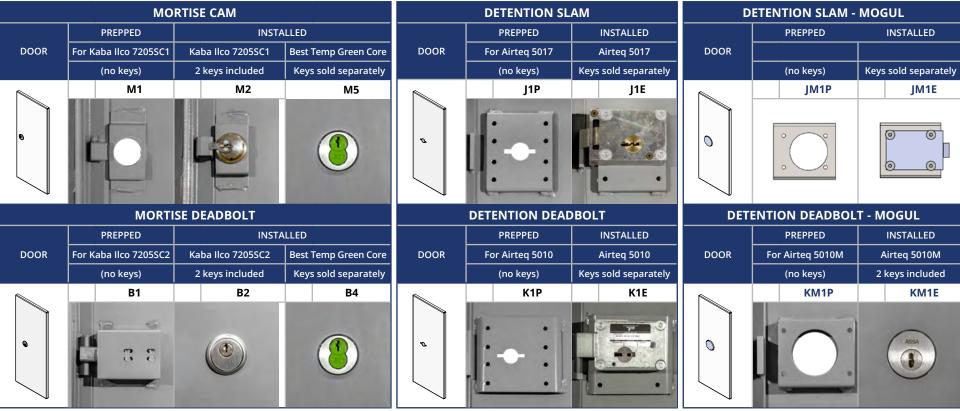

Locks come standard as Left Hand operated. For Right Hand operation please contact Customer Service.

### **LOCK PARTS - SOLD SEPARATELY**

QTY	LOCK TYPE	MODEL DESCRIPTION					
	MORTISE CAM/DEADBOLT						
	M2 06431		Kaba Ilco 7205SC1, 1-1/4" Dia x 1-1/4" long mortise cylinder with standard cam				
	IVIZ	06431-KEY	Key for 06431				
	M2/M5 0646		Lock nut ring (req. for cylinders if supplied by others)				
	M5 08356		Best 1E74C4RP3626, 1-¼" long mortise cylinder with C4 cam				
		06441	Kaba Ilco 7205SC2, 1-%" Dia x 1-%" long mortise cylinder with Adams Rite cam				
	B2	06441-KEY	Key for 06441				
	В4	SL-1E74	Temporary green construction core, Best 1E74C181RP3626, 1-%" diameter x 1-%" long mortise cylinder with C181 Adam Rite cam				
	M5/B4	040004	Key, Operation				
		040005	Key, Control to remove core				
	Other	Specify:					

QTY LOCK TYPE N		MODEL	DESCRIPTION				
	DETENTION SLAM						
	DDI-5017		Airteq 5017 medium security, latchbolt 1" x 7/16" bolt throw				
	J1E	DDK-5017	Key for DDI-5017 (sold separately)				
	JM1E	DDI-5017M	Airteq 5017M, Mogul, medium security, stainless steel 1" x 7/16" bolt				
		DDK-5017M	Keys for DDI-5017M				
	DETENTION DEADBOLT						
	K1E	DDI-5010	Airteq 5010, zinc plated steel bolt 1-1/2" x 3/4" and 5/8" bolt throw				
	NIE	DDK-5010	Key for DDI-5010 (sold separately)				
	KM1E	DDI-5010M	Airteq 5010M, Mogul zinc plated steel bolt 1- 1/2" x 1/2" and 5/8" throw				
	KIVITE	DDK-5010M	Keys for DDI-5010M				
	Other Specify:						