



 FIRE-RATED, IMPACT SAFETY-RATED GLAZING


fireglass[®]20

WE ARE A TECHNICAL GLASS PRODUCTS (TGP) OEM PARTNER



FEATURES:

- **UL Classified and labeled**
- **Impact safety rated**
- **Protects from fire & impact on both sides of the glass**
- **Fire protective - protects against flames and smoke**
- **Large sizes available**

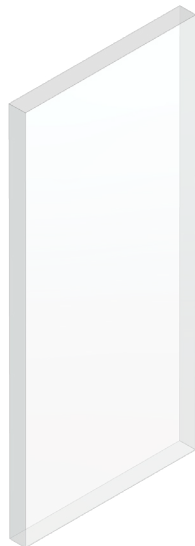

FIREGLASS 20

FIRE-RATED, IMPACT SAFETY-RATED TEMPERED GLASS

Fireglass 20 is a 1/4" tempered clear safety glass for 20 minute doors tested without hose stream.

SPECIFICATIONS: Tempered, clear safety glass for 20 minute applications

Material: Glass ceramic with ultraHD[®] technology for improved surface quality and color and a high performance surface-applied fire-rated film

Thickness: 1/4" (6 mm)

Weight: 3.0 psf

Approx. Light Transmission: 89%

STC: 31

Size:

Minimum: 4-1/2" x 12" diagonal

Maximum Sheet Size: 36" x 89"

RATINGS:

Fire Rating: 20 minutes based on size and application, not hose stream tested

UL classified and labeled: UL9, UL10B, UL10C, NFPA 80, NFPA 252

Impact Safety Rating: CPSC 16CFR 1201 (Cat 1 & II), ANSI Z97.1

OPTIONS: Frosted

NOTE: Fireglass 20 replaces PyroGlassShield



ACTIVAR CONSTRUCTION PRODUCTS GROUP INC.

1-800-554-6077 | SALES@ACTIVARCPG.COM

©2025 Activar Construction Products Group, Inc.

1-30-2025