


GLAZING - BRG - Non-Fire-Rated Ballistics Glazing

Ballistics-rated lamination of glass materials that meets UL 752 requirements for interior or exterior use.

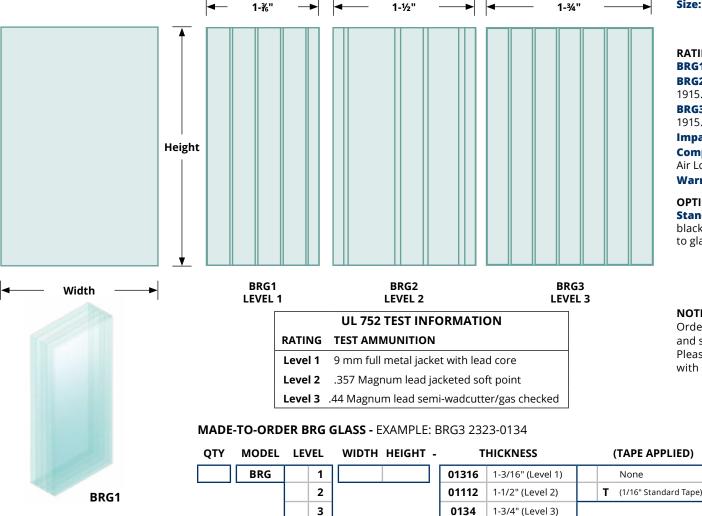

SPECIFICATIONS:

Material: Multiple panels of annealed glass, and polyvinyl butyral (PVB). The PVB is laminated to the glass, forming an extremely strong, clear, chemical and mechanical bond.

Thickness: 1-3/16", 1-1/2", 1-3/4" (30.1, 37.5, 45 mm)

Weight: 15.5, 20.5, 23.0 psf

Size:

Minimum: 6" x 6" **Maximum:** 60" x 96"

RATINGS:

BRG1: UL 752 Level 1

BRG2: UL 752 Level 2. ASTM F 1233.08 Class 5 & 2.5. ASTM F 1915.03 Grade 1, HP White TP 0500.03 Level IV Sequence 43 BRG3: UL 752 Level 3. ASTM F 1233.08 Class 5 & 2.5. ASTM F 1915.03 Grade 1, HPW TP 0500.03 Level IV, Sequence 43-44

Impact Safety Rating: CPSC 16CFR 1201 (CAT | & ||) Compatible Frames: ThruBoltLine VLFIG & VLFS10. Air Louvers vision lite is not available with BRG3 glazing.

Warranty: Five year limited

OPTIONS & ACCESSORIES:

Standard Tape: TAPE: 1/16" x 3/8" wide 200ft, adhesive back, black closed cell polyvinyl chloride foam glazing tape applied to glazing or ordered separately.

TAPE. WHEN ORDERED SEPARATELY

GTAPE 200B	200' Roll Tape
------------	----------------

NOTE:

Order size is actual glass size. This is not a fire-rated product and should not be used in fire-rated door applications. Please consult your AHI to make sure your glazing complies with local ordinances before ordering.

It is the responsibility of the customer to communicate specifications and product performance requirements that are needed for their application. This document is intended to convey potential product configurations and offerings. It is not to be used to imply or represent a specification or rating, of finished products shipped. Detailed, specific submittals can be created upon request. It is the responsibility of the customer to specify product accordingly to comply with local laws, codes, and ordinances.

