


### **GLAZING - PYRAN PLATINUM L - PPL - Fire-Rated Laminated Glazing**

Laminate of two panes of neutral-colored fire and safety-rated glazing.

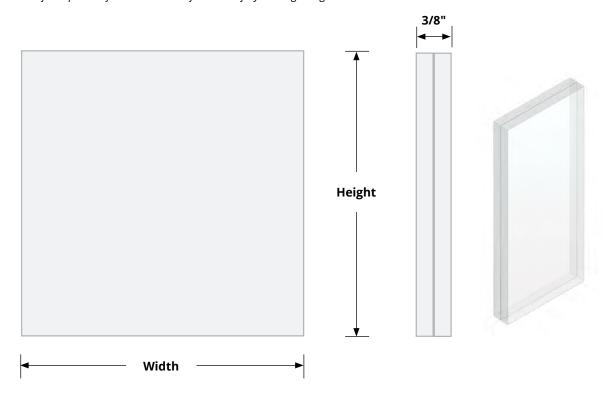

#### MADE-TO-ORDER PYRAN PLATINUM L- FXAMPI F: PPI 1212-38T

QTY	MODEL	WIDTH	HEIGHT	- THICKNESS	TA	PE APPLIED OPTIONS	FIN	IISH OPTIONS
	PPL			38		None		None
						<b>T</b> Standard Tape 1/16"		<b>FF</b> Frost

#### SPECIFICATIONS:

Material: 2 panes of glass ceramic with laminate in between

**Thickness:** 3/8" (9.5 mm)

Weight: 4.31 psf

**Light Transmission: 80%** 

**STC:** 36

Size: Reference chart on page 2

**Minimum:** 4" x 6"

Maximum Sheet Size: 43" x 77"

Order size is actual size

#### **RATINGS:**

Glazing bug marking on lower right corner

Fire Rating: ASTM E2074, ASTM-2010-01, UL9, UL10B, UL10C, NFPA80,252 & 257, UBC 7-2, UBC 7-4, ULC CAN4-S104 &

CAN4-S106

Impact Safety Rating: CPSC 16CFR 1201 (CAT | & II) ANSI Z97.1

**Warranty:** Five year limited

Compatible Frames: Slimline VSIG, EZline VLFEZIG, Thrubolt VLFIG

#### **OPTIONS & ACCESSORIES:**

Finishes: Frost

**Tape:** Standard glazing tape or intumescent glazing tape applied

to both sides of glazing

Please consult with your AHJ to make sure your glazing complies with local ordinances before ordering.

#### TAPE WHEN SOLD SEPARATELY

Qty	Model	Description / Dimensions	
GTAPE 200B		Standard glazing tape 1/16" thick x 3/8" wide x 200 ft	

Refer to glazing tape submittal for more information

® PYRAN is a registered trademark of SCHOTT AG.



# **AIR LOUVERS**

800-554-6077	
sales@activarcpg.cor	n

<b>(</b>	www.activarcpg.com
----------	--------------------

Distributor: Project: Approved By: **Contractor:** Date: **Architect:** Scale: N/A Pages: 1 of 2 Item #:



# **GLAZING - PYRAN PLATINUM L - PPL - Fire-Rated Safety Glazing**



RATING (MINUTES)	UL TESTED MAX EXPOSED DIMENSIONS* WIDTH HEIGHT	GLAZING "BUG" MARKING	GLAZING TAPE REQUIREMENTS
---------------------	---	-----------------------------	------------------------------

### **Doors**

00	37.75"	99"	D-H-NT-90	<b>GTAPE 200B</b> Standard glazing tape 1/16"	
90	2736	sq in	OH-90		
180	12"	33"	D-H-NT-180	GTAPE 200B	
100	100	sq in	D-H-INT-180	Standard glazing tape 1/16"	

 $<sup>{}^\</sup>star$  Refer to maximum sheet size on page 1 for manufacturing capabilities. UL listed sizes may be larger than the the maximum sheet size shown on page 1.

## Window, Transom, Sidelite

Up to 90	99"	99"	D-H-NT-90	GTAPE 200B	
	3143	sq in	OH-90	Standard glazing tape 1/16"	

Interpretation of Fire and Building Codes may vary. Consult with the Local Authority Having Jurisdiction (AHJ) to determine appropriate standards.







Page 2 of 2