


**GLAZING - TEMPERED - TEMP - Non-Fire-Rated Safety Glazing**

*Glass for non-fire-rated applications requiring safety rated glazing.*

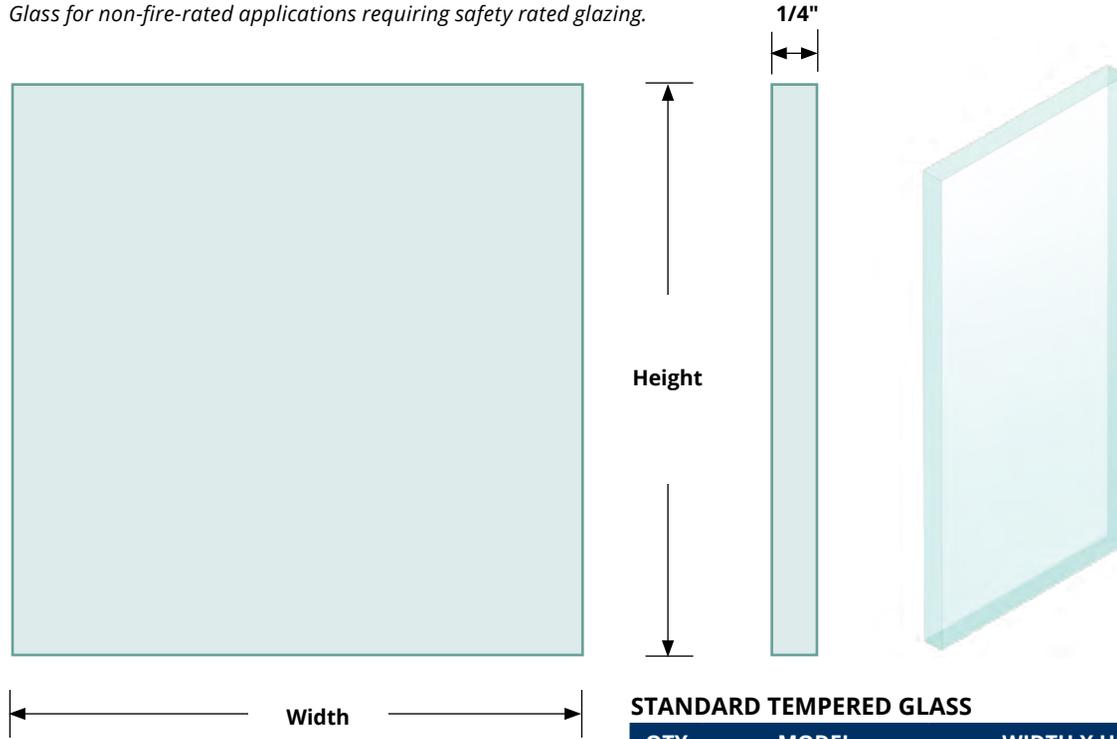

**SPECIFICATIONS:**

**Material:** Heat-treated clear safety glass that breaks into small particles.

**Thickness:** 1/4" (6 mm)

**Weight:** 2.5 psf

Light Transmission: 86%

**STC:** 31

**Size:**

**Minimum:** 2" x 2"

**Maximum:** 83" x 130"

**NOTE:** Order size is actual glass size

**RATINGS:**

**Impact Safety Rating:** Rated and labeled CPSC 16CRF 1201 (Cat. I & II), ANSI Z97.1

**Warranty:** None

**Compatible Frames:** Slimline VSL & VSLH, EZLine VLFEZ, ThruBoltLine VLF

**OPTIONS & ACCESSORIES:**

**Unique Options:** One way mirror, low E

**Finishes:** Frosted, tinted bronze, tinted gray

**Standard Tape:** 1/16" x 3/8" wide x 200 ft adhesive backed, black closed cell polyvinyl chloride foam glazing tape applied to glazing or ordered separately.

**TAPE, WHEN ORDERED SEPARATELY**

<b>GTAPE 200B</b>	200' Roll Tape
-------------------	----------------

**STANDARD TEMPERED GLASS**

QTY	MODEL	WIDTH X HEIGHT
	TEMP 1111-14	11" x 11"
	TEMP 0434-14	4" x 34"
	TEMP 0526-14	5" x 26"
	TEMP 0621-14	6" x 21"
	TEMP 0731-14	7" x 31"
	TEMP 0735-14	7" x 35"
	TEMP 2323-14	23" x 23"
	TEMP 2329-14	23" x 29"
	TEMP 2331-14	23" x 31"
	TEMP 2335-14	23" x 35"
	TEMP 2359-14	23" x 59"
	TEMP 2363-14	23" x 63"

**NOTE:** This is not a fire-rated product and should not be used in fire-rated door applications. Tempered glass cannot be cut after manufacturing.




**AIR LOUVERS**

9702 Newton Ave S. Bloomington, MN 55431 | Many Locations Nationwide

800-554-6077  
 sales@activarcpg.com  
 www.activarcpg.com

Distributor:		Project:
Contractor:		Approved By:
Date:		Architect:
Scale: N/A	Pages: 1 of 2	Item #:

**GLAZING - TEMPERED - TEMP - Non-Fire-Rated Safety Glazing**

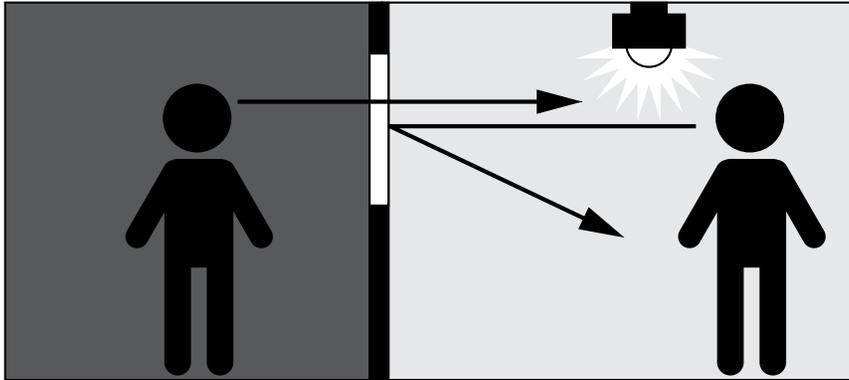

Mirrored Glazing works best at a 8:1 Light Ratio

**TEMPERED ONE WAY MIRROR - Glazing**

One way vision mirrored tempered glass.

**SPECIFICATIONS:**

**Material:** Gray mirrored tempered glass with durable pyrolytic coating.

**Weight:** 4 psf

**Light Transmission:** 8:1

**Visible Transmittance:** 11%

**Visual Transmission:**

**Coated side:** 68%

**Reflected Side:** 16%


**Size:**

**Minimum:** 2" x 2"

**Maximum:** 72" x 96"

**Warranty:** None

Other glazing options available upon request



None



Frosted  
FROST



Tinted Gray  
FG



Tinted Bronze  
FB

**MADE-TO-ORDER TEMPERED GLASS EXAMPLE: TEMP 1323-14**

QTY	MODEL	WIDTH	HEIGHT - THICKNESS	(FINISH OPTIONS)	(TAPE APPLIED)
	<b>TEMP</b> (Tempered)		<b>14</b>	(None)	(None)
	<b>TEMPLE</b> (Low-E)			<b>FROST</b> (Frosted)	<b>T</b> (1/16" Standard Tape)
	<b>MIRR</b> (Mirrored)			<b>FG</b> (Tinted Gray)	
				<b>FB</b> (Tinted Bronze)	