


GLAZING TAPE


Glazing tape used on Air Louvers glazing and vision lite products.

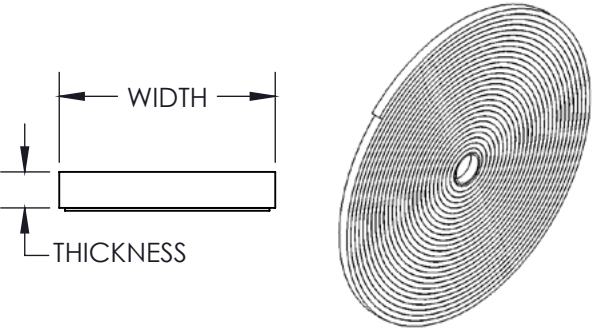


INSTALLATION: See detailed installation instructions for your product. Do not stretch material, as product can retract or shrink if stretched. Remove release liner when properly positioned. This product has a shelf life of 6 months. Store and install product at temperatures between 50°F and 100°F. Adhesive is fully set in 24 hours.


QTY	MODEL	WIDTH	THICKNESS	ROLL LENGTH	MATERIAL	COLOR	UL RATING	USES
	GTAPE 200B	3/8"	1/16"	200 ft	STANDARD GLAZING TAPE 1/16" Medium density closed cell polyvinyl chloride foam glazing tape with adhesive backing both sides	Black	N/A	Standard glazing tape for all applications.
	FGS4590-8	7/16"	3/64"	8 ft	INTUMESCENT GLAZING TAPE Fire rated intumescent tape with adhesive backing on one side.	Black	UL10B/ UL10C	Standard intumescent tape used when required.
	FGS3000S90	7/16"	5/64"	16 ft	INTUMESCENT GLAZING TAPE FOR WIRED GLASS Aluminum hydroxide intumescent with adhesive backing on one side	White	UL10B/ UL10C	Used with WireShield and WireLite NT glazing. Required for larger exposed glazing areas.
	GTAPE-F-100B	3/8"	1/8"	100 ft	STANDARD GLAZING TAPE 1/8" Medium density closed cell polyvinyl chloride foam glazing tape with adhesive backing both sides	Black	N/A	Used only on 20 minute fire-rated wood doors with Slim-line vision lites with 3/16" keralite or 1/4" wire glazing.
	GTAPEK-0L-33W	9/16"	3/16"	32.8 ft	HIGH TEMPERATURE TAPE Calcium magnesium silica chemistry high temperature glazing tape with adhesive backing on one side	White	N/A	Used on FireLiteNT and FireLite Plus glazing when high temperature tape required for 90 minute ratings that exceed 1393 sq in.


It is the responsibility of the customer to communicate specifications and product performance requirements that are needed for their application. This document is intended to convey potential product configurations and offerings. It is not to be used to imply or represent a specification or rating of finished products shipped. Detailed, specific submittals can be created upon request. It is the responsibility of the customer to specify product accordingly to comply with local laws, codes, and ordinances.



AIR LOUVERS
9702 Newton Ave S. Bloomington, MN 55431 | Many Locations Nationwide

 800-554-6077

 sales@activarcpg.com

 www.activarcpg.com

Distributor:		Project:	
Contractor:		Approved By:	
Date:		Architect:	
Scale: N/A	Pages: 1 of 1	Item #:	

© 2024 Activar Construction Products Group, Inc.

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF ACTIVAR CONSTRUCTION PRODUCTS GROUP, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF ACTIVAR CONSTRUCTION PRODUCTS GROUP, INC. IS PROHIBITED.

7-16-2024