


# ADJUSTABLE Z-BLADE LOUVER: 1100 SERIES

Manually-Operated Adjustable Louver for Doors, Transoms and Partitions



1100A  
Photo &  
Drawing

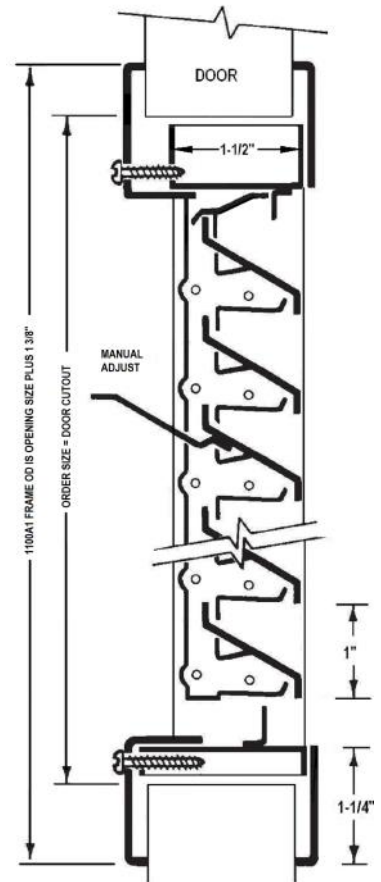

## SPECIFICATIONS:


<b>Material:</b>	18 ga. CRS frame and 16 ga. blades. Min size 8" W x 6" H , Max 24" W x 36"H.
<b>Construction:</b>	<b>Louver:</b> Z-blades riveted to operating bar and frame at 1" intervals in 1-1/2" deep welded frame. Mechanical stop holds blades open. <b>1100A Frame:</b> Mitered and welded corners; screws fastened through prepared frame into louver core leaving corridor side of frame free of fasteners. <b>1100C &amp; Core:</b> 1/2" stop on top, 1/4" on bottom and 3/8" on sides.
<b>Operation:</b>	Manually-adjustable on interior face unless otherwise specified.
<b>Door:</b>	_____ 1-3/8"-1 3/4" - Any Style. <b>Door cutout = order size.</b>
<b>Mounting Options:</b>	_____ <b>Select one mounting option from table below.</b>
<b>Fasteners:</b>	Phillips head screws #8 x 3/4" to match finish.
<b>Powder Coat Finishes:</b>	_____ (B) Mineral Bronze (standard color) _____ (G) Gray _____ (BK) Black _____ (FBK) Flat Black _____ (W) White _____ (SI) Silver _____ (S) Sand These and other color examples can be viewed on our website
<b>Free Flow Area:</b>	45% free area.

## OPTIONAL FEATURES AT AN ADDITIONAL COST:

<b>Finishes &amp; Materials:</b>	_____ (E) Zinc-Plated for corrosion resistance & exterior use .
<b>Fasteners:</b>	_____ Torx _____ Other: _____
<b>Screen:</b>	Screens are installed in roll-formed aluminum frame that is secured with screws or tape to the corridor side of the louver. A & C frames order 1" > opening size. Core order 1/4" < opening size. _____ <i>Insect Screen—18 x 14 Mesh;</i> Select option: _____ aluminum _____ bronze _____ fiberglass _____ stainless
<b>Custom:</b>	Custom sizes, other door thicknesses— contact customer service.

**Order Format:** 1100 \_\_\_\_\_  
**Example:** 1100A 1212B A,C or blank Option E W H Color

DOOR MOUNTING OPTIONS - SELECT ONE	
<b>1100A:</b> Self-attaching, blade unit with flanged frame welded to face (corridor) side and separate removable flanged frame on opposite side: frame adjustable to fit any door thickness from 1-3/8" to 1-3/4".	
<b>1100:</b> Core basic blade unit only; for interior door or as transom louver held in place with wood or metal molding (by others); any door size.	
<b>1100C:</b> Basic blade unit with single flanged frame welded to face (corridor) side. Wood or metal molding (by others) used on opposite side; fits any size door	

 <p><b>AIR LOUVERS</b></p> <p>© 2023 Activar Construction Products Group, Inc.</p>	<b>Distributor:</b> _____	<b>Width:</b> _____ x <b>Height:</b> _____
	<b>Architect:</b> _____	<b>Quantity:</b> _____
	<b>Contractor:</b> _____	<b>Model:</b> _____
	<b>Project:</b> _____	<b>Date:</b> _____ <b>Version:</b> 10/12/23
<p><b>800-554-6077</b>    <b>QUOTES@ACTIVARCPG.COM</b>    <b>ORDERS@ACTIVARCPG.COM</b>    <b>SALES@ACTIVARCPG.COM</b></p> <p><b>VISIT <a href="http://WWW.ACTIVARCPG.COM">WWW.ACTIVARCPG.COM</a> FOR THE MOST UPDATED PRODUCT INFORMATION BEFORE ORDERING</b></p> <p><b>MFG: COMMERCE CA, BLOOMINGTON, MN • WAREHOUSES: MANY LOCATIONS ACROSS NORTH AMERICA</b></p>		