


ALUMINUM INVERTED V-BLADE LOUVER: 1300 SERIES

Inverted "V" With 60% Free Area Recommended for Buildings Where All-Aluminum Construction is Desired, or for Humid Environments



1300A1
Photo &
Drawing

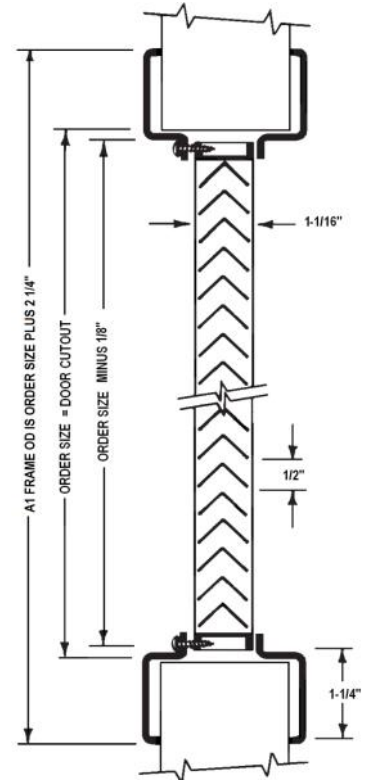

SPECIFICATIONS:

Material:	Formed from .050 aluminum. Min size 6" W x 4" H, max 24" W x 80" H. Multiple sections can be combined for larger sizes. See below for framed screen minimum sizes.	
Construction:	Louvers: "V" blades with 1/2" blade spacing are attached by interlocking construction to the 1-1/16" deep, welded frame. Frame: 1-1/4" trim, mitered and welded corners. Screws fasten through frame into louver core, leaving corridor side of frame free of fasteners.	
Door:	<input type="checkbox"/> 1-3/4" - Any Style. Door cutout = order size. <input type="checkbox"/> 1 3/8"-1 3/4" - 1300C, 1300A, 1300	
Mounting Options:	<input type="checkbox"/> Select one mounting option from table below.	
Fasteners:	#8 x 3/4" Phillips head screws to match finish.	
Powder Coat Finishes:	<input type="checkbox"/> (B) Mineral Bronze (standard color) <input type="checkbox"/> (G) Gray <input type="checkbox"/> (BK) Black <input type="checkbox"/> (FBK) Flat Black <input type="checkbox"/> (W) White <input type="checkbox"/> (SI) Silver <input type="checkbox"/> (S) Sand These and other color examples can be viewed on our website	
Fasteners:	#8 x 3/4" Phillips head screws.	
Free Flow Area:	60% free area.	

OPTIONAL FEATURES AT AN ADDITIONAL COST:

Fasteners:	<input type="checkbox"/> Torx <input type="checkbox"/> Other: _____
Screen:	Screens are installed in roll-formed aluminum frame which are 3/8" less than order size. Minimum louver size 6" x 6" required to add screen option. A1—installed on corridor side, 1300C, 1300A & 1300—installed on room side <input type="checkbox"/> Insect Screen—18 x 14 Mesh; Select option: <input type="checkbox"/> aluminum <input type="checkbox"/> bronze <input type="checkbox"/> fiberglass <input type="checkbox"/> stainless <input type="checkbox"/> Bird Screen; 1/4" x 1/4"
Custom:	Custom sizes, other door thicknesses— contact customer service.

Order Format:	1300 _____
Example: 1300A1 1212SI	A1,A,C or blank W H Optional Color

DOOR MOUNTING OPTIONS - SELECT ONE	
1300A1: Self-attaching, vandal-proof design; basic blade unit with flanged frame welded to face (corridor) side and separate removable flanged frame on opposite side; fits 1-3/4" thick doors only.	
1300: Core basic blade unit only for interior doors; or as transom louver held in place with wood or metal molding (by others); any door size.	
1300C: Basic blade unit with single flanged frame welded to face (corridor) side. Wood or metal molding (by others) used on opposite side; fits any size door.	
1300A: Basic blade unit with flanged frame welded to face (corridor) side and separate flanged frame on opposite side; frame adjustable to fit any door thickness from 1-3/8" to 1-3/4".	

 <p>AIR LOUVERS</p> <p>© 2023 Activar Construction Products Group, Inc.</p>	Distributor: _____	Width: _____ x Height: _____
	Architect: _____	Quantity: _____
	Contractor: _____	Model: _____
	Project: _____	Date: _____ Version: 12/8/23
<p>800-554-6077 QUOTES@ACTIVARCPG.COM ORDERS@ACTIVARCPG.COM SALES@ACTIVARCPG.COM</p> <p>VISIT WWW.ACTIVARCPG.COM FOR THE MOST UPDATED PRODUCT INFORMATION BEFORE ORDERING</p> <p>MFG: COMMERCE CA, BLOOMINGTON, MN • WAREHOUSES: MANY LOCATIONS ACROSS NORTH AMERICA</p>		