

INVERTED V-BLADE LOUVER: 600 SERIES


Inverted "V" Blades with 60% Free Area - Recommended for Schools, Class "A" and Institutional Buildings



SPECIFICATIONS:

Material:	18 gauge CRS frame, 20 gauge blade for CRS louver and blade. Minimum size 6" W x 4" H. Maximum size 24" W x 80" H. Multiple sections can be combined for larger sizes. See below for framed screen minimum sizes.	
Construction:	Louvers: Inverted "V" blades with 1/2" blade spacing are attached by interlocking construction to a 1" deep, welded frame. Non-vision. 600A1 Frame: 1-1/4" trim, mitered and welded corners. Screws fasten through frame into louver core, leaving corridor side of frame free of fasteners.	
Door:	<input type="checkbox"/> 1-3/4" - Any Model	Door cutout = order size
	<input type="checkbox"/> 1 3/8"-1 3/4" - 600C, 600A, 600	
Mounting Options:	<input type="checkbox"/> Select one mounting option from table below	
Fasteners:	Phillips head screws #8 x 3/4" to match finish	
Powder Coat Finishes:	<input type="checkbox"/> (B) Mineral Bronze (standard color) <input type="checkbox"/> (G) Gray <input type="checkbox"/> (BK) Black <input type="checkbox"/> (FBK) Flat Black <input type="checkbox"/> (W) White <input type="checkbox"/> (SI) Silver <input type="checkbox"/> (S) Sand These and other color examples can be viewed on our website	
Free Flow Area:	60% free area.	

600A1
Self-Attaching
Frame
Photo &
Drawing

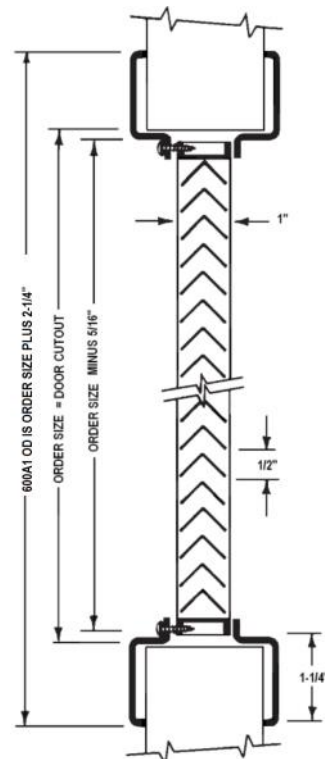


DOOR MOUNTING OPTIONS - SELECT ONE	
600A1: Self-attaching, vandal-proof design; basic blade unit with flanged frame welded to face (corridor) side and separate removable flanged frame on opposite side; fits 1-3/4" door only.	
600: Core basic blade unit only; for interior door or as transom louver held in place with wood or metal molding (furnished by others); fits any size door.	
600C: Basic blade unit with single flanged frame welded to face (corridor) side. Wood or metal molding (by others) used on opposite side; fits any size door.	
600A: Basic blade unit with flanged frame welded to face (corridor) side and separate flanged frame on opposite side; frame adjustable to fit any door thickness from 1-3/8" to 1-3/4".	

OPTIONAL FEATURES AT ADDITIONAL COST:

Finishes & Materials:	<input type="checkbox"/> (S) 20 gauge stainless steel, #4 finish <input type="checkbox"/> 16 gauge CRS <input type="checkbox"/> (J) Galvanneal sheet for exterior use and corrosion-resistance <input type="checkbox"/> (EG) Zinc-Plated for corrosion resistance & exterior use.
Fasteners:	<input type="checkbox"/> Torx <input type="checkbox"/> Other: _____
Screen:	Screens are installed in roll-formed aluminum frame which are 3/8" less than order size. Minimum louver size 6" x 6" required to add screen option. A1—installed on corridor side, 600C, 600A & 600—installed on room side <input type="checkbox"/> <i>Insect Screen—18 x 14 Mesh;</i> Select option: <input type="checkbox"/> aluminum <input type="checkbox"/> bronze <input type="checkbox"/> fiberglass <input type="checkbox"/> stainless <input type="checkbox"/> <i>Bird Screen; 1/4" x 1/4"</i>
Custom:	Custom sizes, other options; Contact Customer Service.

Order Format: 600 _____
Example: 600A 1212B A,A1,C, Blank Option S,J,EG W H Color

 © 2023 Activar Construction Products Group, Inc.	Distributor: _____	Width: _____ x Height: _____
	Architect: _____	Quantity: _____
	Contractor: _____	Model: _____
	Project: _____	Date: _____ Version: 12/8/23
800-554-6077 QUOTES@ACTIVARCPG.COM ORDERS@ACTIVARCPG.COM SALES@ACTIVARCPG.COM VISIT WWW.ACTIVARCPG.COM FOR THE MOST UPDATED PRODUCT INFORMATION BEFORE ORDERING MFG: COMMERCE CA, BLOOMINGTON, MN • WAREHOUSES: MANY LOCATIONS ACROSS NORTH AMERICA		