
FLUSH-MOUNTED LOUVER FOR TRANSOMS: 700TL

Two Rows of Inverted Split "Y" Blades in a 1-13/16" Frame for Flush Mounting in Hollow Metal Frames.




SPECIFICATIONS:

Material:	18 gauge CRS frame and blades. Min size 10" x 10", Max 36" x 36". Multiple sections can be combined for larger transoms.		
Construction:	2 rows of inverted split "Y" blades at 1" intervals. Blades are attached by interlocking construction to the 1-13/16" deep assembly mounted in a "U" channel frame. Non-vision construction.		
Frame:	For installation into hollow metal frame by others. Frame inside dimensions of opening = order size.		
Fasteners:	Mounting bracket furnished with hex head self-drilling tek screw.		
Powder Coat Finishes:	(B) Mineral Bronze (standard color)(G) Gray(BK) Black(FBK) Flat Black(W) White(SI) Silver(S) Sand These and other color examples can be viewed on our website		
Free Flow Area:	50% free area.		

OPTIONAL FEATURES AT AN ADDITIONAL COST:

Finishes & Materials:	(S) 18 gauge frame and blades #4 stainless steel satin finish 16 gauge CRS (J) Galvanneal sheet for exterior use and corrosion-resistance (E) Zinc-plated for corrosion resistance & exterior use		
Screen:	Screens are installed with rivets or screws between sections.		

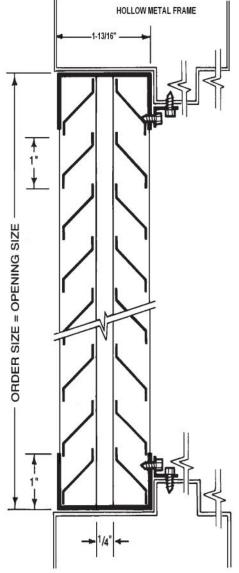

Order Format:	700TL				
Example: 700TLJ 1212E	Option S,J,E	W	Н	Color	

AIR LOUVER	S
------------	---

© 2023 Activar Construction Products Group, Inc.

Distributor:	Width:x Height:
Architect:	Quantity:
Contractor:	Model:
Project:	Date: Version: 10/12/23

800-554-6077 QUOTES@ACTIVARCPG.COM ORDERS@ACTIVARCPG.COM SALES@ACTIVARCPG.COM
VISIT www.activarcpg.com for the most updated product information before ordering
Mfg: Commerce CA, bloomington, MN • Warehouses: Many Locations Across North America