

INVERTED Y-BLADE LOUVER: 800 SERIES


Inverted "Y" Blades Recommended for Schools, Class "A" and Institutional Buildings.

800A1 in Optional
Stainless Steel
Finish



SPECIFICATIONS:

Material:	18 gauge CRS frame and 20 gauge blades. Min size 6" W x 4" H, Max 48" W x 80" H. Multiple sections can be combined for larger sizes. See below for framed screen minimum sizes.	
Construction:	Louvers: Inverted "Y" blades with 1" blade spacing are attached by interlocking construction to the 1" deep, welded frame. Non-vision. 800A1 Frame: 1-1/4" trim, mitered and welded corners. Screws fasten through frame into louver core, leaving corridor side of frame free of fasteners.	
Door:	<input type="checkbox"/> 1-3/4" Any Style. Door cutout = order size. <input type="checkbox"/> 1 3/8"-1 3/4" - 800C, 800A, 800 (Core)	
Mounting Options:	<input type="checkbox"/> Select one mounting option from table below.	
Fasteners:	Phillips head screws #8 x 3/4" to match finish.	
Powder Coat Finishes:	<input type="checkbox"/> (B) Mineral Bronze (standard color) <input type="checkbox"/> (G) Gray <input type="checkbox"/> (BK) Black <input type="checkbox"/> (FBK) Flat Black <input type="checkbox"/> (W) White <input type="checkbox"/> (SI) Silver <input type="checkbox"/> (S) Sand These and other color examples can be viewed on our website	
Free Flow Area:	50% free area.	

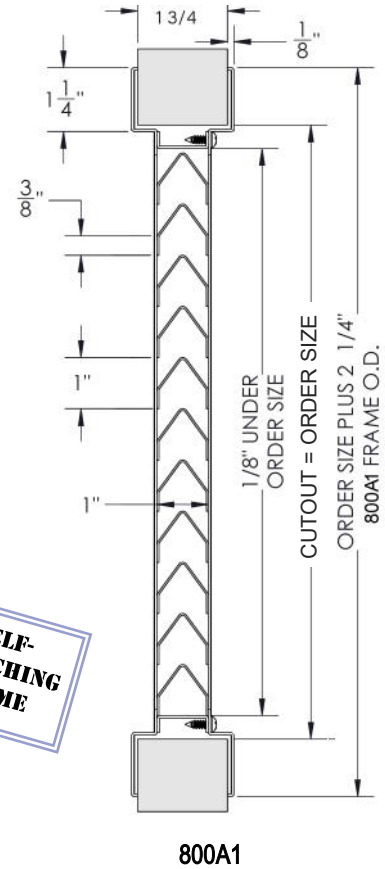

SELF-ATTACHING FRAME


OPTIONAL FEATURES AT AN ADDITIONAL COST:

Finishes & Materials:	<input type="checkbox"/> (S) 18 gauge frame and 20 gauge stainless steel, #4 finish <input type="checkbox"/> 16 gauge CRS <input type="checkbox"/> (J) Galvanneal sheet for exterior use and corrosion-resistance <input type="checkbox"/> (E) Zinc-plated for corrosion resistance & exterior use
Fasteners:	<input type="checkbox"/> Torx <input type="checkbox"/> Other: _____
Screen:	Screens are installed in roll-formed aluminum frame which are 3/8" less than order size. Minimum louver size 6" x 6" required to add screen option. A1—installed on corridor side, 800C, 800A & 800—installed on room side <input type="checkbox"/> <i>Insect Screen—18 x 14 Mesh;</i> Select option: <input type="checkbox"/> aluminum <input type="checkbox"/> bronze <input type="checkbox"/> fiberglass <input type="checkbox"/> stainless <input type="checkbox"/> <i>Bird Screen; 1/4" x 1/4"</i>
Custom:	Custom sizes, other door thicknesses— contact customer service.

DOOR MOUNTING OPTIONS - SELECT ONE	
800A1: Self-attaching, vandal-proof design; basic blade unit with flanged frame welded to face (corridor) side and separate removable flanged frame on opposite side; fits 1-3/4" door only.	
800: Core basic blade unit only; for interior door or as transom louver held in place with wood or metal molding (furnished by others); any size door.	
800C: Basic blade unit with single flanged frame welded to face (corridor) side. Wood or metal molding (by others) used on opposite side; fits any size door.	
800A: Basic blade unit with flanged frame welded to face (corridor) side and separate flanged frame on opposite side; frame adjustable to fit any door thickness from 1-3/8" to 1-3/4".	

STOCK ITEM— 800A1 IN STOCK IN STANDARD SIZES

Order Format: 800
Example: 800A1 1212S A,A1,C or Blank Option S,J,E W H Color

 AIR LOUVERS <small>© 2023 Activar Construction Products Group, Inc.</small>	Distributor: _____	Width: _____ x Height: _____
	Architect: _____	Quantity: _____
	Contractor: _____	Model: _____
	Project: _____	Date: _____ Version: 12/8/23
800-554-6077 QUOTES@ACTIVARCPG.COM ORDERS@ACTIVARCPG.COM SALES@ACTIVARCPG.COM VISIT WWW.ACTIVARCPG.COM FOR THE MOST UPDATED PRODUCT INFORMATION BEFORE ORDERING MFG: COMMERCE CA, BLOOMINGTON, MN • WAREHOUSES: MANY LOCATIONS ACROSS NORTH AMERICA		