MINIBLINDS FOR VISION LITES - Custom
INSTALLATION & MAINTENANCE GUIDE | 14I-329

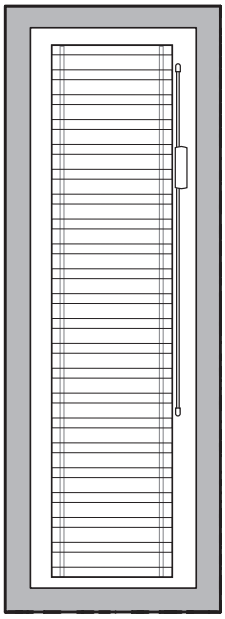

Custom Miniblinds

GENERAL:

Air Louvers Miniblind Series Vision Lite PAKs are the ideal solution to add privacy to doors. Available in the Slimline (VSIG) and EZline (VLFEZIG), featuring a professional look with self-attaching fasteners visible on the room side only.

The custom version includes a fingertip operator on a rod that slides to raise, lower and tilt the miniblinds with customizable colors and sizes.

TOOLS NEEDED:

- Screwdriver with Phillips head - standard

INSTALLATION:

1. Read and follow the installation requirements of the door manufacturers.
2. Cut the hole in the door and prepare, if required, per the door manufacturer. The door cutout corresponds to the order size of the vision lite. Assure the opening is plumb and square.
3. Caulking, tape or compound can be applied to both sides of the frame/glazing interface. Air Louvers vision lites do not require glazing tape for installation, however, it is recommended to apply the standard glazing tape 1/16" (GTAPE 200B) to help protect against breakage caused by metal to glass contact.
4. Insert the corridor side frame in the cutout, squaring to door.
5. Insert miniblind unit into frame, seating firmly, using setting blocks as needed.
6. Inserting two of the screws provided in the countersunk holes, carefully align the room side of the frame to the holes in the corridor side of the frame. Screw in enough to hold frame in place for alignment, then insert the other screws lightly. Tighten the screws alternately in a criss-cross pattern to avoid putting more pressure on one side than the other. Do not tighten to the point of deflecting the frame.
7. Remove red protective retainer on operator.



VSIG FRAME



VLFEZIG FRAME

OPERATION:

All models have a single fingertip raise, lower and tilt controller which slides up and down on a rod on the right side of the unit. The slide operator is mounted to the rod with a clip.

MAINTENANCE:

To clean the glass, use a soft cloth and glass cleaner; do not use abrasive cleaners containing corrosive solutions.

Dual Operator:
Lift and Tilt

© 2025 Activar Construction Products Group, Inc.

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF ACTIVAR CONSTRUCTION PRODUCTS GROUP, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT WRITTEN PERMISSION IS PROHIBITED.